

## Sub-1GHz OOK / FSK High Performance RF Transmitter Module

### Product Overview

RFM119B is a RF module with which +20dBm high power and high performance thus to support 127 to 1020 MHz frequency, OOK, (G) FSK modulation. The module is high integration so it simplifies the peripheral materials needed in the system design, so users can secondary development easily. The transmission power is up to +20 dBm, which can improves the link performance of the application, even can support a variety of packet formats and codec so as to flexibly meet the requirements of various applications for different data packet formats and coding.

Also, the RFM119B module can support 64-byte Tx FIFO, the GPIO and interrupt configuration, auto Tx running mode, low voltage detection, low frequency timing interrupt wake-up MCU, manual fast frequency hopping and so on, which making the application designs more flexible thus to achieve product differentiation design. The working voltage of RFM119B is from 1.8 V to 3.6 V. The output power of +13dBm only consumes 23 mA emission current. It only consumes 80mA transmit current in the case of +20dBm output power. It is the best choice for low power and high efficiency.



RFM119B

### Ordering Information

| Module No.    | Working Frequency |
|---------------|-------------------|
| RFM119B-315S2 | 315MHz            |
| RFM119B-433S2 | 433.92MHz         |
| RFM119B-868S2 | 868.35MHz         |
| RFM119B-915S2 | 915MHz            |


### Features

- Comply with FCC and ETSI safety rules
- Strong anti-interference ability, suitable for complex interference environment scenarios
- Frequency range: 127~1020MHz
- Modulation and demodulation mode: OOK, (G) FSK &(G)MSK
- Data rate: 0.5~300 kbps
- Voltage Range: 1.8~3.6 V
- Transmit current
  - 23 mA @ 13 dBm, 433.92 MHz, FSK
  - 80 mA @ 20 dBm, 433.92 MHz, FSK
- Support tAuto Tx Mode
- Deep sleeping: 300 nA
- Low power wake-up: 800 nA
- 3-wire SPI interface
- Support direct and package mode
- Configurable packet processor& 64-Byte FIFO
- Support forward error correction

### Applications

- Home security and building automation
- ISM band data communication
- Industrial monitoring and control
- Remote control and security system
- Remote key entry
- Wireless sensor nodes
- Labeling reader

**Pin Information**

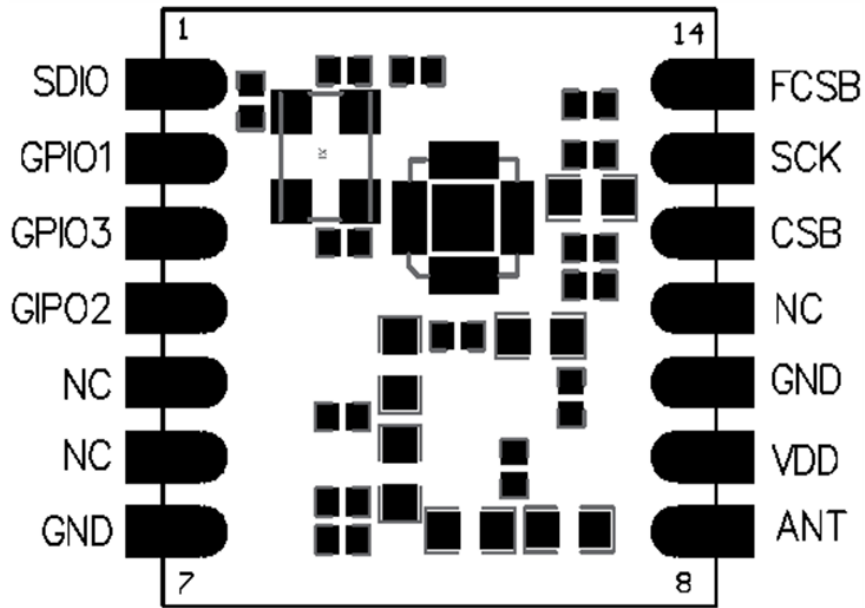

**Figure 1. RFM119B Pin Assignment (Top View)**

**Table 1. RFM119B pin functions**

| Pin No. | Name  | Description                             |
|---------|-------|---|
| 1       | SDIO  | SPI Data input & output                 |
| 2       | GPIO1 | Configurable as: DIN,INT1,INT2,DCLK(TX) |
| 3       | GPIO3 | Configurable as: CLKO,DIN,INT2,DCLK(TX) |
| 4       | GPIO2 | Configurable as: DIN,INT1,INT2,DCLK(TX) |
| 5       | NC    | Not connected                           |
| 6       | NC    | Not connected                           |
| 7       | GND   | Ground                                  |
| 8       | ANT   | antenna                                 |
| 9       | VDD   | Positive power supply                   |
| 10      | GND   | Ground                                  |
| 11      | NC    | Not connected                           |
| 12      | CSB   | SPI Selection to access registers       |
| 13      | SCK   | SPI clock                               |
| 14      | FCSB  | SPI selection to access FIFO            |

## Electrical parameters

Testing conditions: Power supply 3.0V, temperature 25 °C

## Recommended operating conditions

**Table 2. Recommended Operating Conditions**

| Parameter                  | Symbol          | Conditions | Minimum | Maximum | Unit  |
|----------------------------|-----------------|------------|---------|---------|-------|
| Supply Voltage             | V <sub>DD</sub> |            | 1.8     | 3.6     | V     |
| Operating Temperature      | T <sub>OP</sub> |            | -40     | 85      | °C    |
| Power Supply Voltage Slope |                 |            | 1       |         | mV/us |

## Absolute Maximum Rating

**Table 3. Absolute Maximum Rating**

| Parameter             | Symbol           | Conditions           | Minimum | Maximum | Unit |
|-----------------------|------------------|----------------------|---------|---------|------|
| supply voltage        | V <sub>DD</sub>  |                      | -0.3    | 3.6     | V    |
| Interface voltage     | V <sub>IN</sub>  |                      | -0.3    | 3.6     | V    |
| junction temperature  | T <sub>J</sub>   |                      | -40     | 125     | °C   |
| Storage temperature   | T <sub>STG</sub> |                      | -50     | 150     | °C   |
| Soldering temperature | T <sub>SDR</sub> | Lasting 30s at least |         | 255     | °C   |
| ESD Level[2]          |                  | HBM                  | -2      | 2       | kV   |
| Latch current         |                  | @ 85 °C              | -100    | 100     | mA   |


## DC Characteristics

**Table 4. DC characteristics**

| Parameter                  | Conditions                             | Minimum | Typical | Maximum | Unit |
|----------------------------|--|---------|---------|---------|------|
| RFM119B Working Conditions | 315MHz band, Pout =+20dBm              |         | 80      | 85      | mA   |
|                            | 433MHz band, Pout =+20dBm              |         | 85      | 90      | mA   |
|                            | 868MHz band, Pout =+20dBm              |         | 85      | 90      | mA   |
|                            | 915MHz band, Pout =+20dBm              |         | 80      | 85      | mA   |
| RFM119B sleep current      | full band                              |         |         | 2       | uA   |
| RFM119B Working band       | Different matching networks are needed | 760     | 868、915 | 1020    | MHz  |
|                            |  | 380     | 433.92  | 510     | MHz  |
|                            |  | 190     | 315     | 340     | MHz  |

| Parameter                      | Conditions | Minimum | Typical | Maximum | Unit |
|--------------------------------|------------|---------|---------|---------|------|
|                                |            | 127     |         | 170     | MHz  |
| FSK data rate                  |            | 0.5     |         | 300     | kbps |
| OOK data rate                  |            | 0.5     |         | 40      | kbps |
| FSK Frequency deviation range  |            | 2       |         | 200     | KHz  |
| Frequency deviation resolution |            |         | 25      |         | Hz   |

### Typical Application

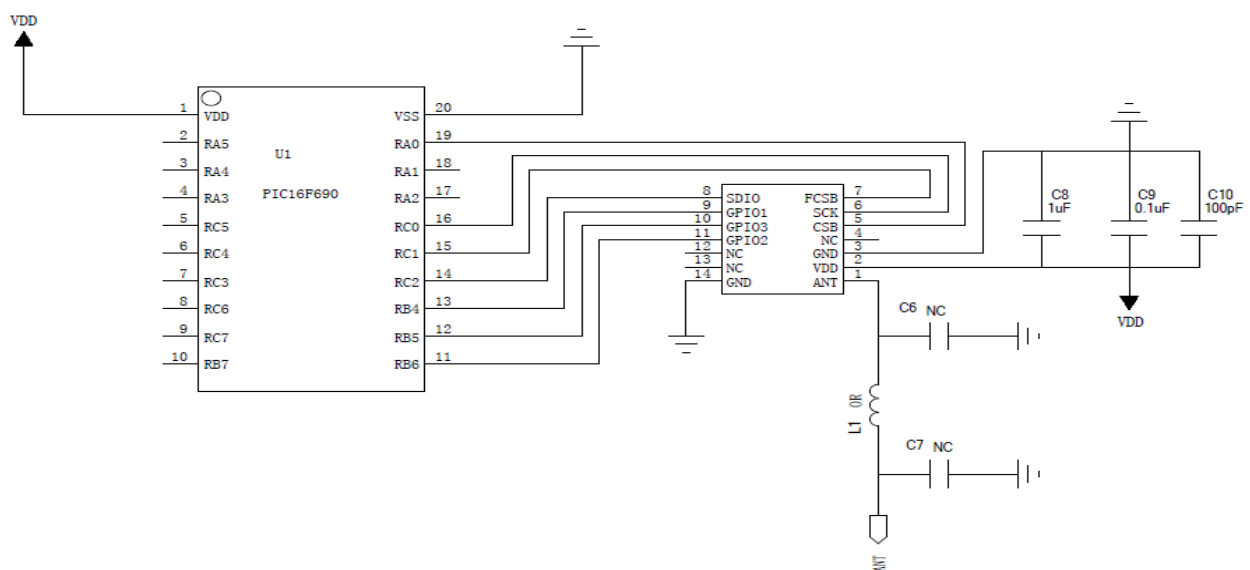

**Figure 2. RFM119B Application Reference Diagram**

For software information, please refer to the chip datasheet and demo program of HopeDuino™ development kit

## Dimensions

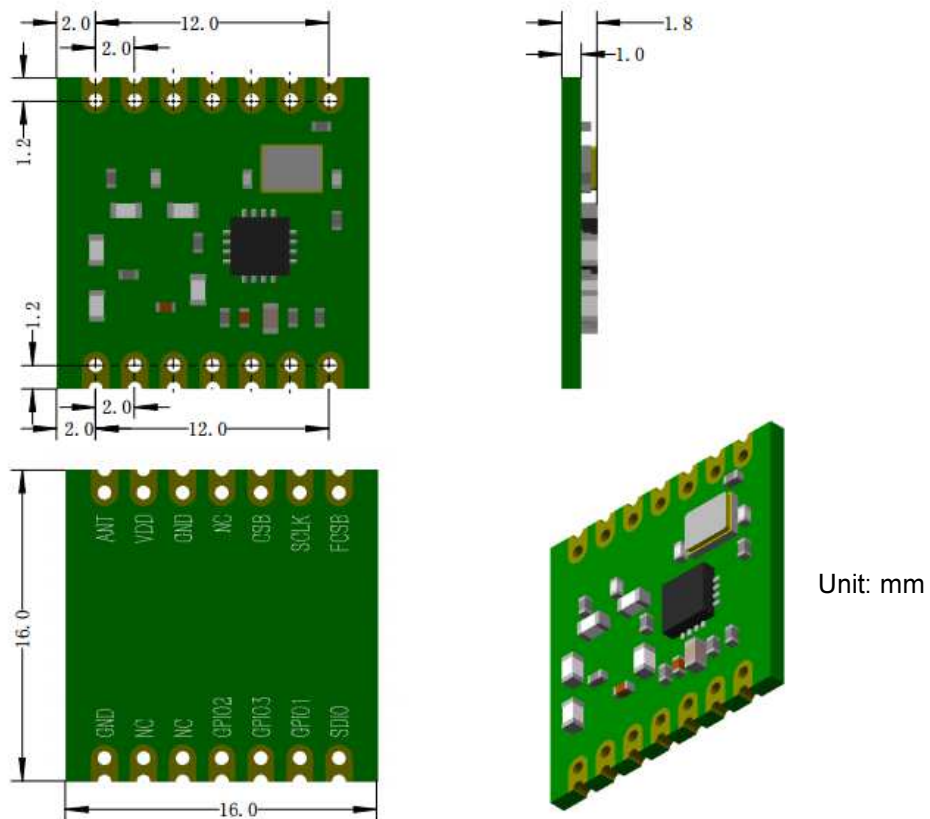


Figure3. Dimensions

**HOPE MICROELECTRONICS CO.,LTD**

Add: 30th floor of 8th Building, C Zone, Vanke Cloud City, Xili Sub-district, Nanshan, Shenzhen, GD, P.R. China

Tel: +86-755-82973805

Fax: +86-755-82973550

Email: [sales@hoperf.com](mailto:sales@hoperf.com)

Website: <http://www.hoperf.com>

This document may contain preliminary information and is subject to change by Hope Microelectronics without notice. Hope Microelectronics assumes no responsibility or liability for any use of the information contained herein. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Hope Microelectronics or third parties. The products described in this document are not intended for use in implantation or other direct life support applications where malfunction may result in the direct physical harm or injury to persons. NO WARRANTIES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE OFFERED IN THIS DOCUMENT.