SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD 315MHz One-Port SAW Resonator For Wireless Remote Control



| Approved by: |
|--------------|
| Checked by: |
| |
| Issued by: |
| |

SPECIFICATION

MODEL: 6AW3433920M0TO3975005

深圳市晶科鑫实业有限公司 SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Add: RM#1805, East Wing, Tian An Hi-tech Plaza Phase 2, Tian An Cyber Park Shenzhen, China

Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499

E-mail: sik@q-crystal.com HTTP://www.q-crystal.com


SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD 315MHz One-Port SAW Resonator For Wireless Remote Control



The HPR315A is a true one- port , surface- acoustic- wave(SAW) resonator in a low- profile TO-39 case.

It provides reliable , fundamental- mode , quartz frequency stabilization of fixed- frequency transmitters operating at 315.00 MHz.

1. Package Dimension (TO-39)

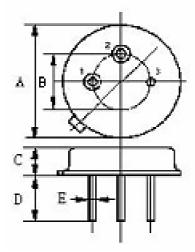

| Pin | Connection | | | |
|-----|-------------|--|--|--|
| 1 | Terminal1 | | | |
| 2 | Terminal2 | | | |
| 3 | Case Ground | | | |


| Dimensions | Data (unit: mm) |
|------------|-----------------|
| Α | 9.30±0.20 |
| В | 5.08±0.10 |
| С | 3.40±0.20 |
| D | 3±0.20 5±0.20 |
| Е | 0.45±0.20 |

2. Marking

H P R315A


Color: Black or Blue

3. Equivalent LC Model and Test Circuit

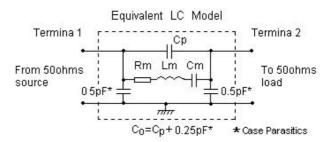


4. Typical Application Circuit

1) Typical Low-Power Transmitter Application



2) Typical Local Oscillator Application




Add: RM#1805, East Wing, Tian An Hi-tech Plaza Phase 2, Tian An Cyber Park Shenzhen, China Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499

E-mail: sik@q-crystal.com HTTP://www.q-crystal.com


SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD 315MHz One-Port SAW Resonator For Wireless Remote Control



5. Typical Frequency Response

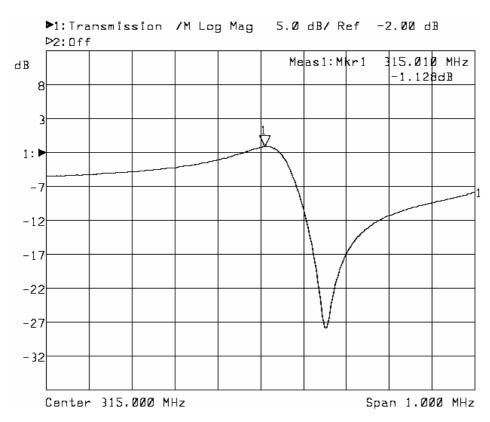

6.Temperature Characteristics

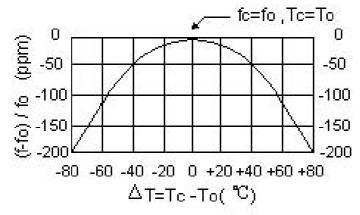

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.

Add: RM#1805, East Wing, Tian An Hi-tech Plaza Phase 2, Tian An Cyber Park Shenzhen, China Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499

E-mail: sik@q-crystal.com HTTP://www.q-crystal.com

SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD 315MHz One-Port SAW Resonator For Wireless Remote Control



7. Performance

7-1.Maximum Rating

| Rating | Value | Units |
|---------------------------------|------------|---------------|
| CW RF Power Dissipation | +10 | dBm |
| DC Voltage Between Any Two Pins | ±30V | VDC |
| Case Temperature | -40 to +85 | ${\mathbb C}$ |

7-2. Electronic Characteristics

| | Characteristic | Sym | Minimum | Typical | Maximum | Units |
|--|-----------------------------------|------------------|---------|-------------|---------|------------|
| Center Frequency (+25°C) | Absolute Frequency | f _C | 314.925 | | 315.075 | MHz |
| | Tolerance from 315.00 MHz | Δ f _C | | ± 75 | | kHz |
| Insertion Loss | | IL | | 1.2 | | dB |
| Quality Factor | Unloaded Q | Q _U | | 11,500 | | |
| | 50 Ω Loaded Q | Q_L | | 1,500 | | |
| Temperature Stability | Turnover Temperature | To | 25 | 40 | 55 | $^{\circ}$ |
| | Turnover Frequency | f _o | | fc | | kHz |
| | Frequency Temperature Coefficient | FTC | | 0.037 | | ppm/°C 2 |
| Frequency Aging Absolute Value during the First Year | | f _A | | ≤10 | | ppm/yr |
| DC Insulation Resistance Between Any Two Pins | | | 1.0 | | | ΜΩ |
| RF Equivalent RLC Model | Motional Resistance | R_{M} | | 15 | | Ω |
| | Motional Inductance | L _M | | 87.1563 | | μH |
| | Motional Capacitance | C _M | | 2.9290 | | fF |
| | Pin 1 to Pin 2 Static Capacitance | Co | 2.3 | 2.6 | 2.9 | pF |

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

Frequency aging is the change in fc with time and is specified at +65°Cor less. Aging may exceed the specification

for prolonged temperatures above $+65^{\circ}$ C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years. 2. The center frequency, f_C, is the frequency of minimum IL with the resonator in the specified test fixture in a 50 Ω test

system with VSWR \leq 1.2: 1. Typically, foscillator or ftransmitter is less than the resonator fc.

- Typically, equipment utilizing this device requires emissions testing government approval, which is the responsibility of the equipment
- Unless noted otherwise , case temperature T_{C} =+25°C \pm 2°C.
- 5. The design, manufacturing process, and specifications of this device are subject to change without notice.

- 6 . Derived mathematically from one or more of the following directly measured parameters: fc, IL, 3 dB bandwidth, fc versus Tc , and Co. 7. Turnover temperature, To , is the temperature of maximum (or turnover) frequency, fo . The nominal frequency at any case temperature, Tc , may be calculated from: f = fo [1 FTC(To -To)]. Typically, oscillator To is 20° C less than the specified resonator To.
- 8. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_0 is the measured static (nonmotional) capacitance between either pin 1 and ground

or pin 2 and ground .The measurement includes case parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25 pF to Co.

Add: RM#1805, East Wing, TianAn Hi-tech Plaza Phase2, TianAn Cyber Park Shenzhen, China Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499

E-mail: sjk@q-crystal.com HTTP://www.q-crystal.com