

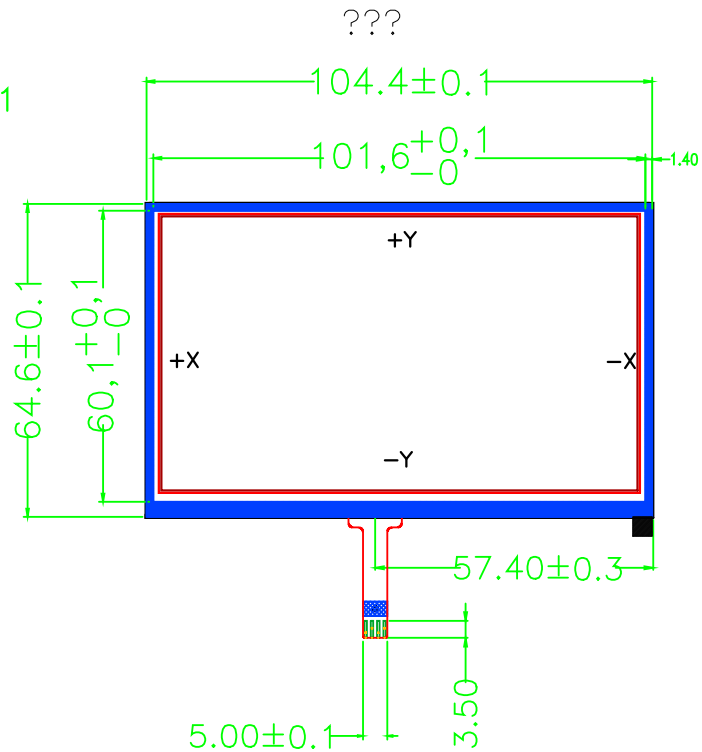


REV.	DESCRIPTION	DATE

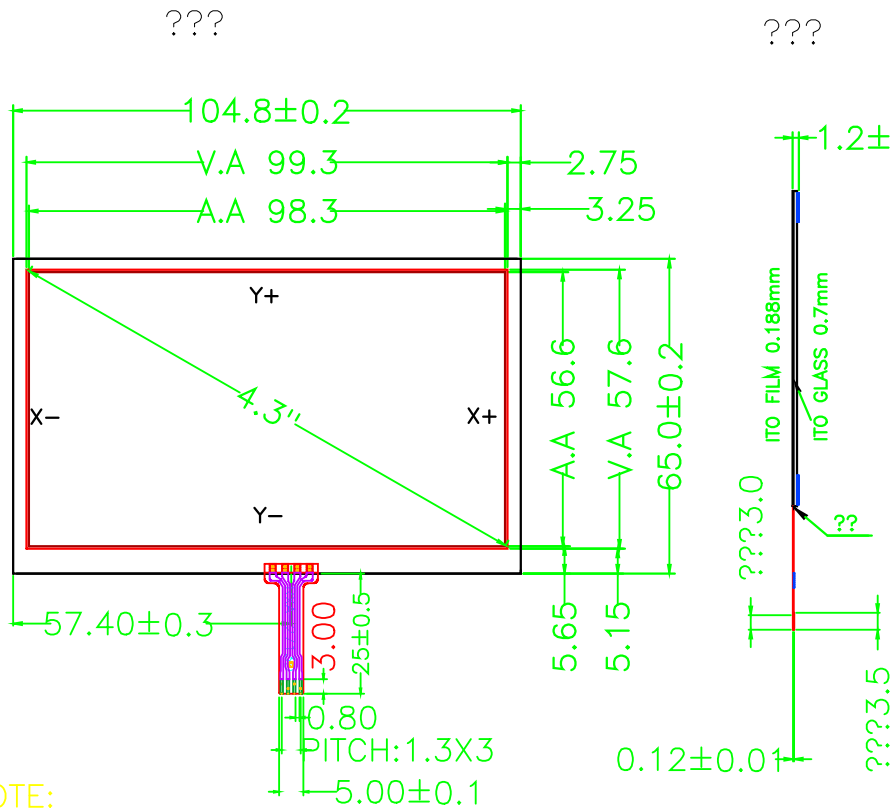

NOTE:


- 1.Surface hardness: ?3H
- 2.Linearity: ?1.5%
- 3.Light Transmission: ?78%
- 4.Chattering: ?10 msec
- 5.Insulation resistance: ?DC 25V 20M?
- 6.Load upon operation: ?100Gg
- 7.Hitting Durability: Hit ?1,000,000 times
- 8.Sliding Durability: Shuttle ?100,000 times
- 9.Operation TEMP: -20~+60?, ?90%RH
- 10.Storage TEMP : -30~+70?, ?90%RH
- 11.Scale : 1:1
- 12.FPC Tail: Ni 2~5?m / Au 0.05~0.15?m
- 13.No note tolerances according to: + / - 0.5 mm



PIN	OUT
1	Y+
2	X-
3	Y-
4	X+

SCALE: 1 : 1	
NOT TO SCALE	
PAGE: 1 OF 2	
GENERAL TOL. 0.50mm	UNITS MM
APPROVALS	DATE
APP Mychan	2014/04/18
CHK Amoril	2014/04/18

MODEL NUMBER :  
RXA-043001-01



CUSTOMER P/N :  
DATE:

