
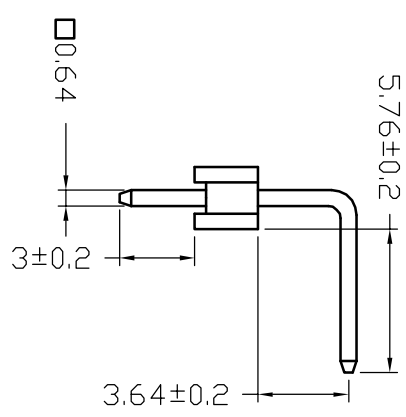
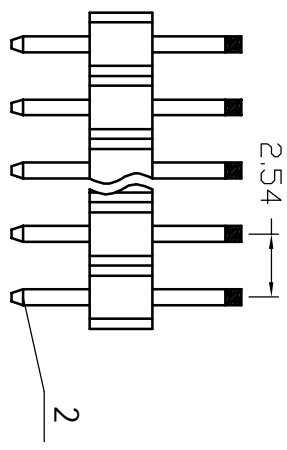


序号/Rev.No.	名称/Title	文件编号/File No.
1	塑料件	
2	端子	

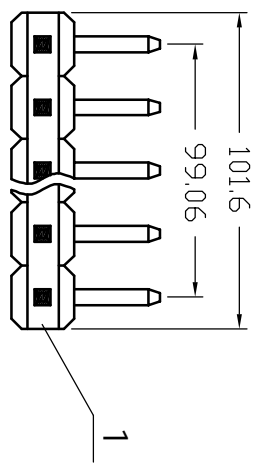

Specifications:  
 Contact Resistance: 30mΩ max. at DC 100 mA  
 Insulator Resistance: 1000MΩ min. at DC 500V  
 Current Rating: 1 AMP  
 Dielectric Withstanding  
 Voltage: AC 500V For 1 minute  
 Operating Temperature: -55 °C--+ 105 °C  
 Contact: Brass  
 Housing: PBT &30 % Glass Fiber(UL 94V-0)

- 要求:
1. 塑料件无裂痕。
  2. 整排端子成一直线，相邻端子之间相互平行。

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date
------------	--------------------	--------------	---------

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X: ±0.1 .XX ±0.05 .xxx ±0.01
图名/Title		文件编号/File No.		X: ±2° .X ±1° .XX ±0.5°
112-A-SRA0G (15.85常规)				
备注/Remark	页序/Sheet			单位/Unit: mm

