

## STRADA-2X2-PX

Fully asymmetric beam designed to highlight pedestrian crossings for right side traffic


### TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	8 mm
Fastening	screw, pin
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.9 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ


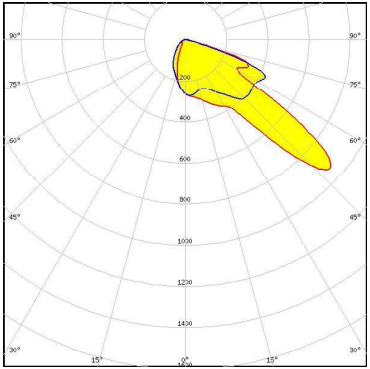

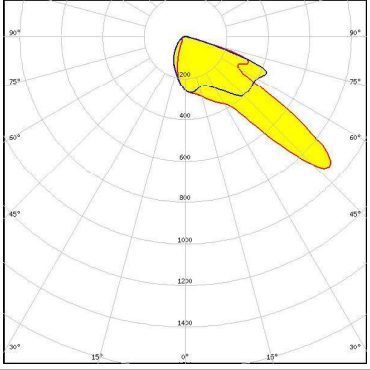

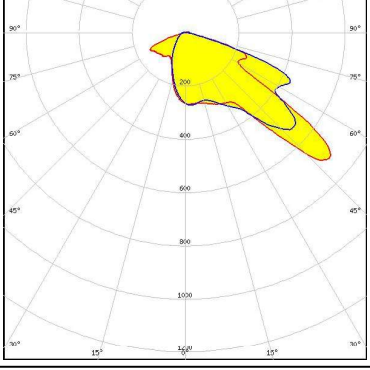

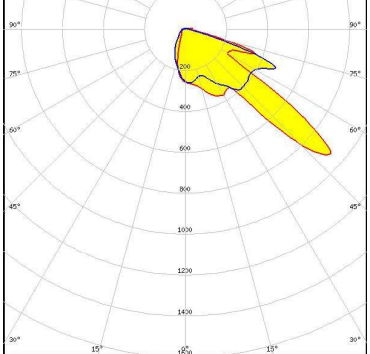
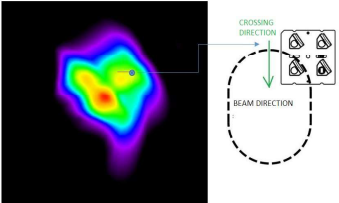


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-PX	Multi-lens	PMMA	clear

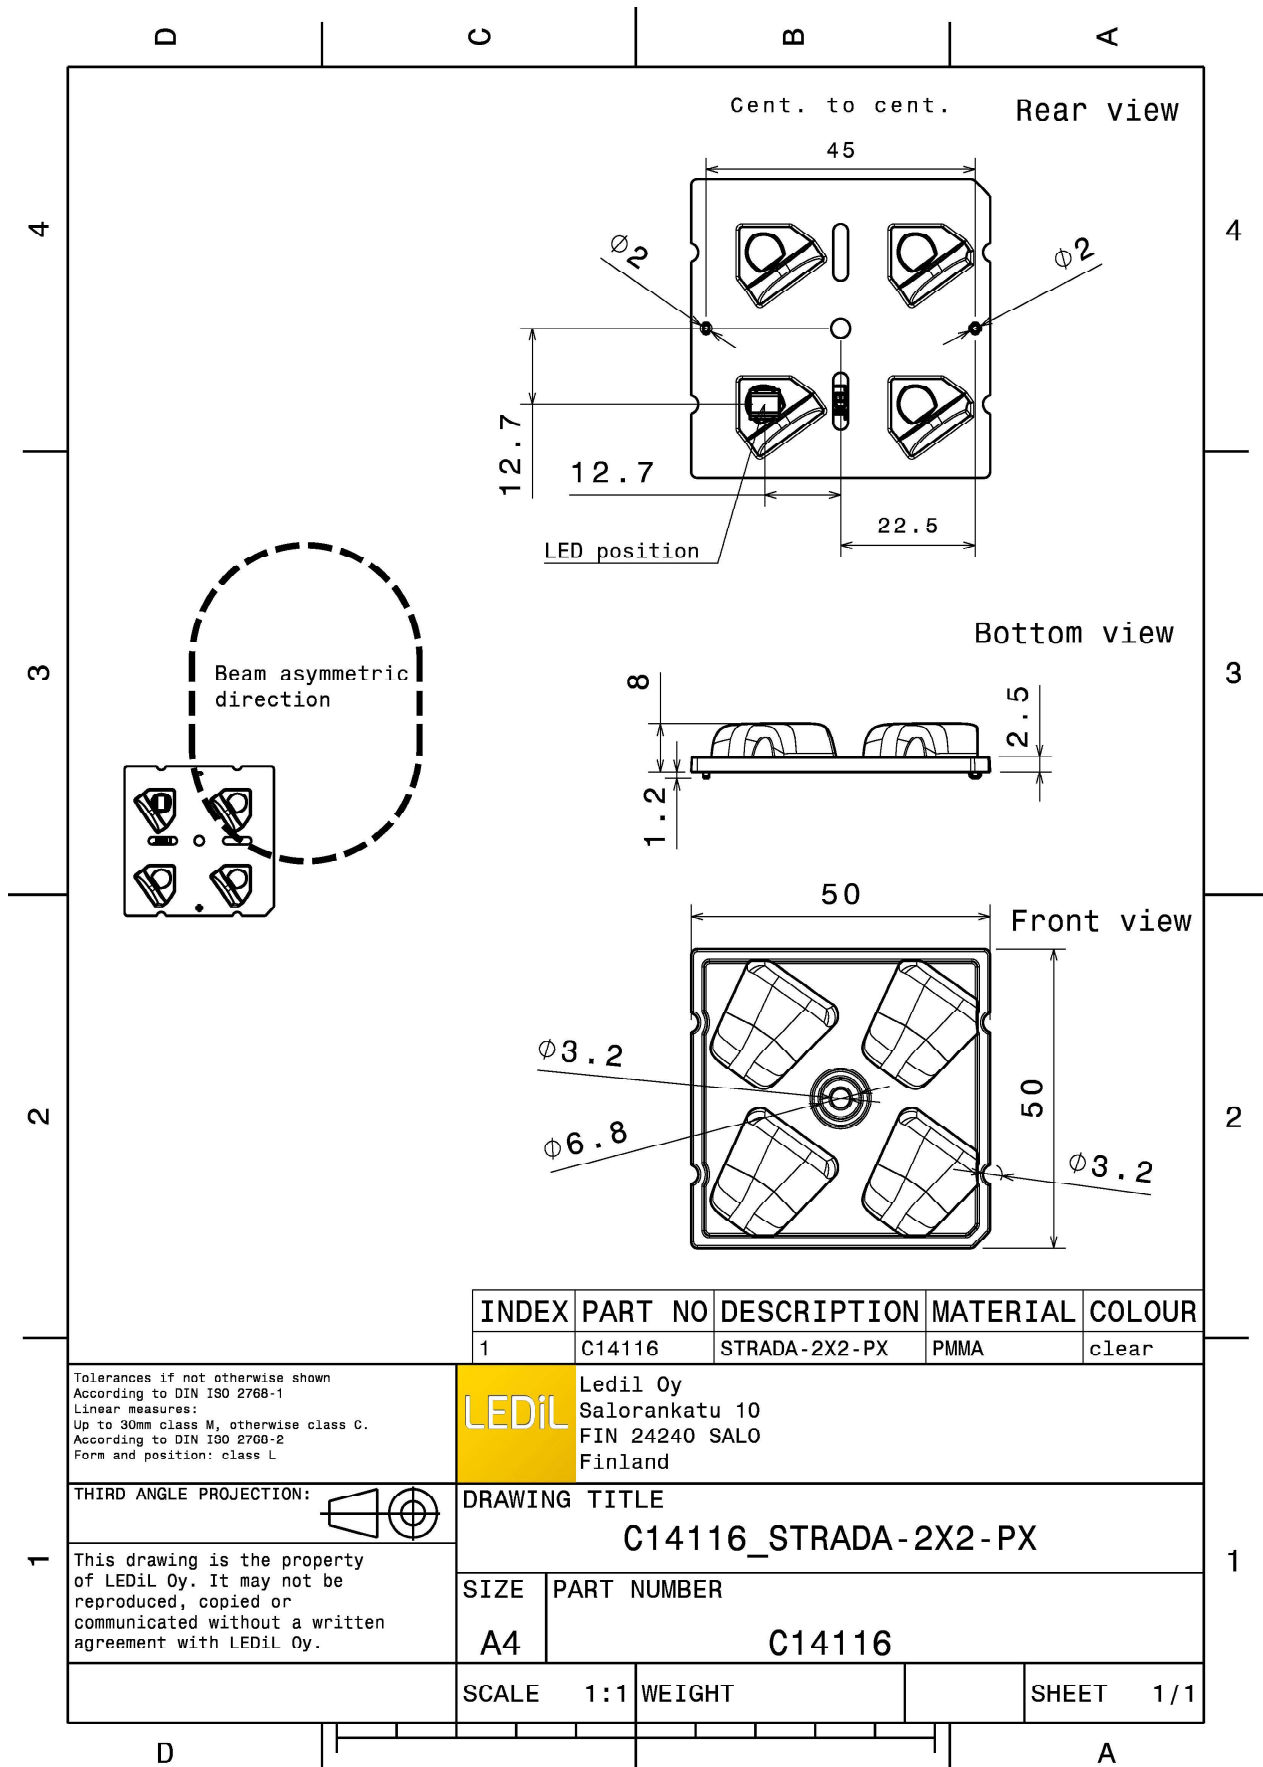




#### PHOTOMETRIC DATA (MEASURED):

 <p> <b>LED</b> QUICK FLUX XTP 2x4 xxx LS G5  <b>FWHM</b> Asymmetric  <b>Efficiency</b> 94 %  <b>Peak intensity</b> 1.000 cd/lm  <b>LEDs/each optic</b> 1  <b>Light colour</b> White  <b>Required components:</b> </p>	
 <p> <b>LED</b> QUICK FLUX XTP 2x6 xxx LS G5  <b>FWHM</b> Asymmetric  <b>Efficiency</b> 94 %  <b>Peak intensity</b> 1.000 cd/lm  <b>LEDs/each optic</b> 1  <b>Light colour</b> White  <b>Required components:</b> </p>	
 <p> <b>LED</b> QUICK FLUX XTP 2x8 xxx LS G5  <b>FWHM</b> Asymmetric  <b>Efficiency</b> 94 %  <b>Peak intensity</b> 0.760 cd/lm  <b>LEDs/each optic</b> 1  <b>Light colour</b> White  <b>Required components:</b> </p>	
 <p> <b>LED</b> XB-D  <b>FWHM</b> Asymmetric  <b>Efficiency</b> 94 %  <b>Peak intensity</b> 1.000 cd/lm  <b>LEDs/each optic</b> 1  <b>Light colour</b> White  <b>Required components:</b> </p>	 <div data-bbox="737 1691 1077 1892" style="display: inline-block; vertical-align: middle;">  <p style="font-size: small;">Light at plane, note LENS rotation shown upright.</p> </div>

#### PHOTOMETRIC DATA (MEASURED):


#### CREE

LED XB-H  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.000 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

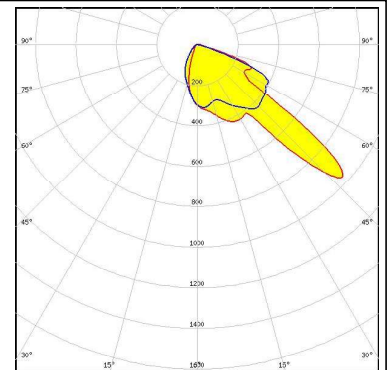




#### CREE

LED XM-L  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.770 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

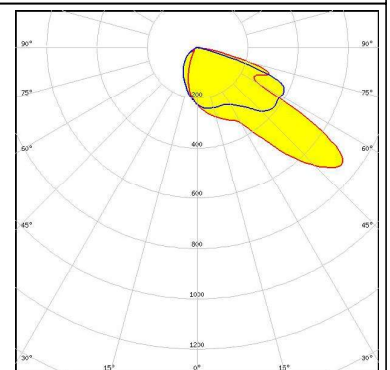




#### CREE

LED XM-L2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.790 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

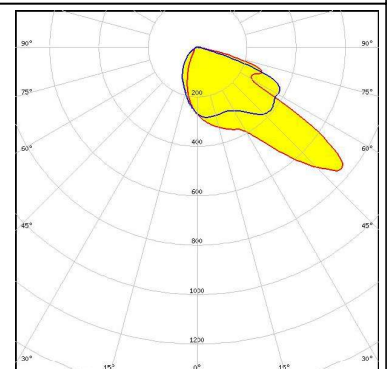

#### CREE




LED XP-E  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.200 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

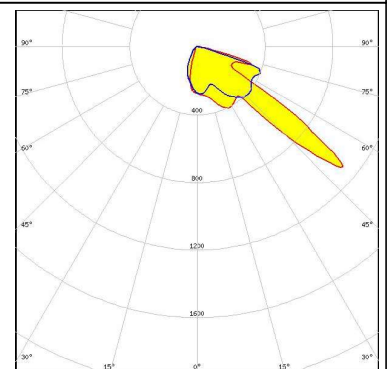

#### PHOTOMETRIC DATA (MEASURED):




#### CREE

LED XP-E2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.200 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

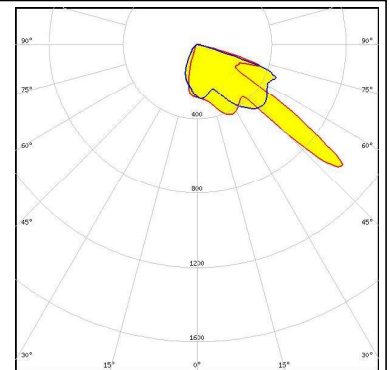




#### CREE

LED XP-G  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.000 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

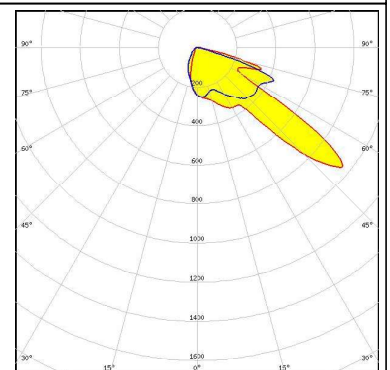


#### CREE

LED XP-G2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.000 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

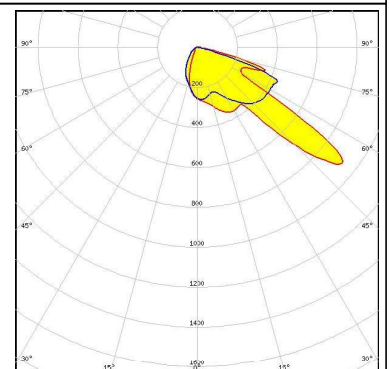

#### CREE




LED XP-G3  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.890 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

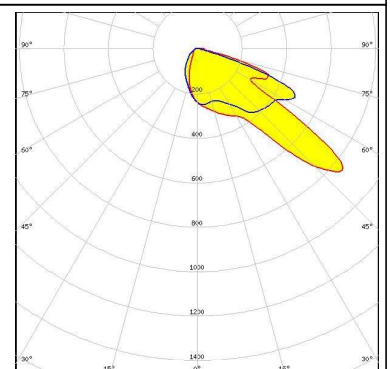


#### PHOTOMETRIC DATA (MEASURED):




LED XP-L HD  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.800 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

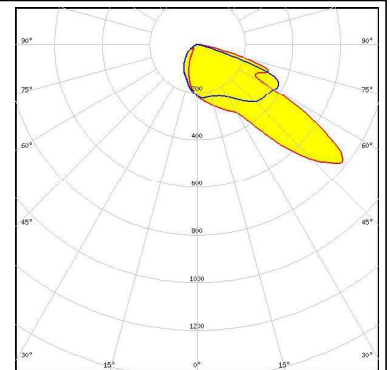

LED XP-L HI  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.000 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

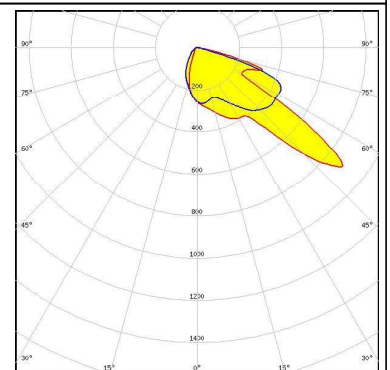

LED XP-L2  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.720 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

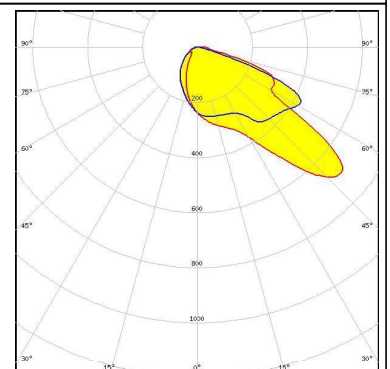

LED XT-E  
 FWHM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.950 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

