

Constant Current LED Power Supply



Product description :

This series was designed for compromise between an attractive price and high performance, which meets SELV standard of preventing electric shock. Protection of open circuit, short circuit, over load and over temperature increased safety in processing. Low standby power consumption complies with ERP directives. Optimized electric circuit design brings cost-effectiveness.



Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493


Characteristics:

- Independent power supply for constant current LED lamp
- Terminal block for quick connection
- Class II protection against electric shock from direct and indirect contact
- SELV output (<60V)
- Fast start-up time $\leq 0.5s$
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- The height is 16mm
- Efficiency 87% (AC230V, full load)
- ECO design, comply with ERP directives


Specifications :

| Model | SLT12-350IF-Es | SLT12-500IF-Es | SLT12-700IF-Es | |
|------------------|--|----------------------------|----------------|-----------|
| Output | turn on time(S) | ≤0.5 | ≤0.5 | ≤0.5 |
| | output current(mA) | 350 | 500 | 700 |
| | output current tolerance ^① | +/-5% | +/-5% | +/-5% |
| | ripple current(mA) | 140(Ip-p) | 200(Ip-p) | 280(Ip-p) |
| | working voltage range(V) | 21-43 | 15-30 | 10-22 |
| | Max. output voltage(V) | 48 | 35 | 27 |
| | dimming interface | No | | |
| | dimming range | n/a | | |
| Input | rated supply voltage(Vac) | 220-240 | 220-240 | 220-240 |
| | voltage range(Vac) | 198-264 | 198-264 | 198-264 |
| | line frequency(Hz) | 50/60 | 50/60 | 50/60 |
| | input current(mA) | 100 | 100 | 100 |
| | efficiency ^② | 87.5% | 86.7% | 85.4% |
| | power factor ^② | 0.70 | 0.70 | 0.70 |
| | inrush current(Ipk) | 13A/10us | 13A/10us | 13A/10us |
| Protection | over voltage protection | YES | YES | YES |
| | short circuit protection | YES | YES | YES |
| | over temperature protection | YES | YES | YES |
| | automatic restart | YES | YES | YES |
| | over load protection | YES | YES | YES |
| | surge capacity | L-N: 500V | L-N: 500V | L-N: 500V |
| Ambient and Life | Ta(°C) | -20...45 | | |
| | Tc max. (°C) | 85 | | |
| | Storage Temperature(°C) | -30...80 | | |
| | ambient humidity range | 5%...85%RH, Not condensing | | |
| | nominal life-time(hrs) | 30'000@Tc=85 C | | |
| Other | weight(g) | 65 | | |
| | dimensions (L×W×H)(mm) | 121×45×16 | | |
| | casing material | Plastic | | |
| | housing colour | White | | |
| | type of protection | IP20 | | |
| | protection class | CLASS II | | |
| Note | <p>1.Tolerance : includes set up tolerance, line regulation and load regulation. 2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 4.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> | | | |



Dimensions(mm):

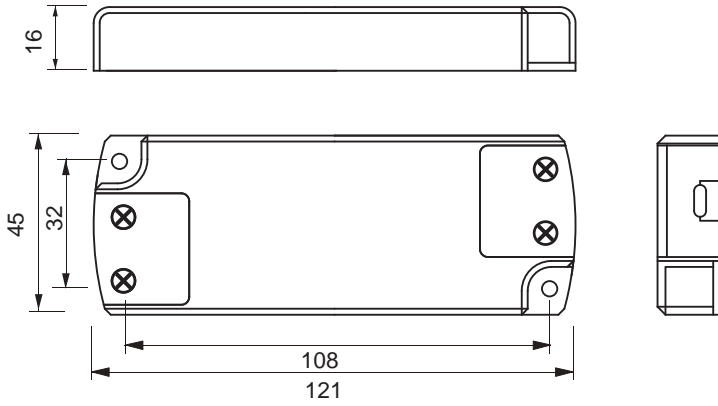

Wiring diagram:

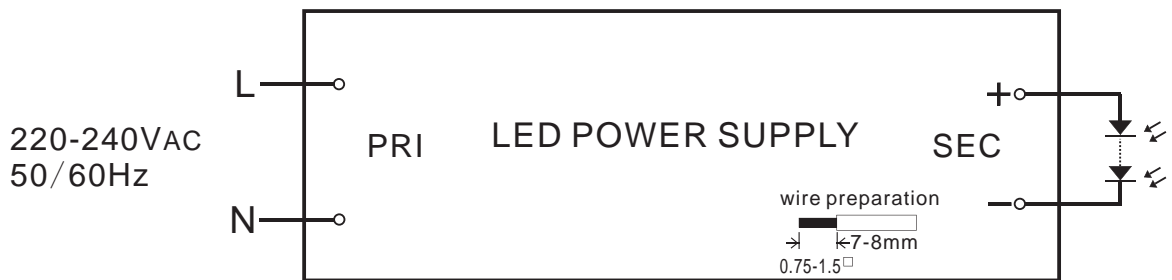

Electrical curves:

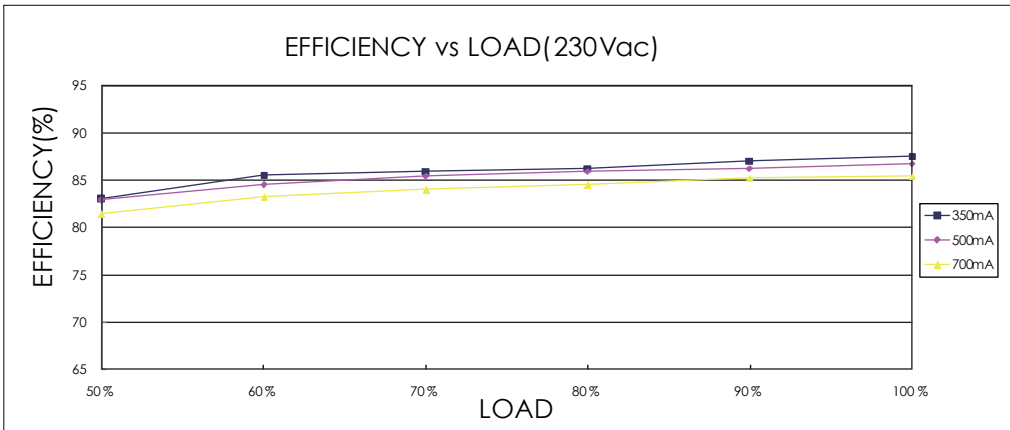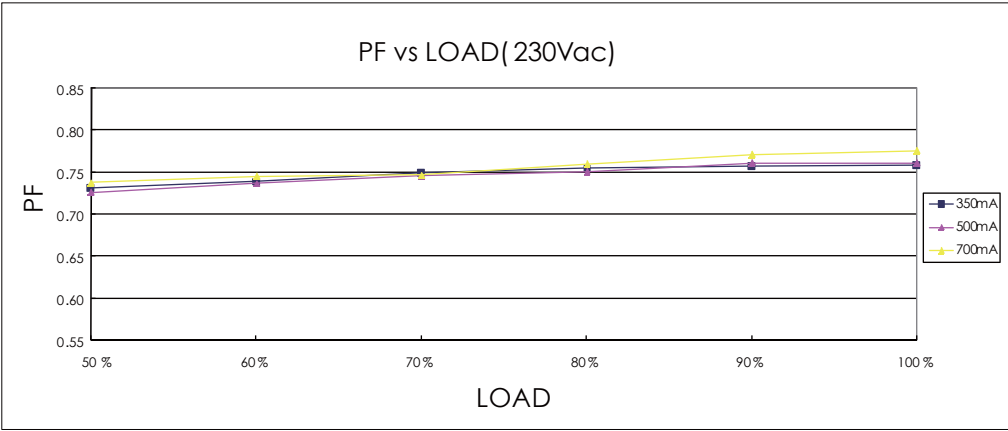

note
For constant current power supply,"LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply,"LOAD" means the percentage of the maximum rated output current.

Sales & Technical Support:

Self Electronics Co.,Ltd.

Add: No. 1345 Ju Xian Road, Ningbo Hi Tech Park, Ningbo, China
Tel: 0086-574-28805765,28805658(For English Assistance)
0086-574-28805678 (For Chinese Assistance)
Fax: 0086-574-28805656
E-mail: sales@self-ecg.com
<http://www.self-ecg.com>

Self Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007,Xinglang Xuan,Xinghe Mingju,Fuming Road,Futian District,Shenzhen
Tel: 0086-755-83558850, 83558851
Fax: 0086-755-83558840

SELF ELECTRONICS FRANCE BRANCH OFFICE

Add:12-14 rue Raymond Ridet, 92250 La Garennes Colombes
Tel: 0033 (0)1 72 42 71 57
E-mail: saleseu@self-electronics.com

SELF ELECTRONICS GERMANY GMBH

Add:August-Horch-Str. 7,51149 Koeln
Tel: 0049 2203 18501-0
Fax: 0049 2203 18501-199
E-mail: saleseu@self-electronics.com

*Due to continuous improvements and innovations,specifications are subjected to change without notice.