




Dimensions:(mm/inches)

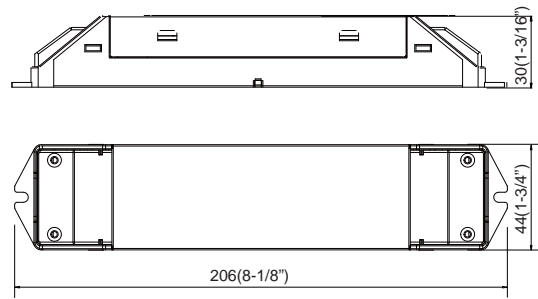

■ Features

- Independent power supply for constant current LED lamp
- Metal housing and plastic cable clamp suitable for class I luminaires
- Terminal block input and output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency $\geq$ 83% (AC230V, full load)

■ Standards

- EN 61347-1
- EN 61347-2-13
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547

■ Characteristics

Rated input voltage: AC220-240V 50/60Hz (power factor measured at AC230V and full load)

Model No.	Constant output current	Output voltage range	$\lambda$	$t_a$	$t_c$	L x W x H	Approval
SLT45-700IL-E	700mA	33-65V	0.95	-20-50°C (-4-122°F)	75°C (167°F)	206x44x30mm (8-1/8"x1-3/4"x1-3/16")	CE