


## MM3Z2V0~MM3Z75

### Features

- Total power dissipation : max. 300 mW
- Small plastic package suitable for surface mounted design
- Tolerance approximately  $\pm 5\%$

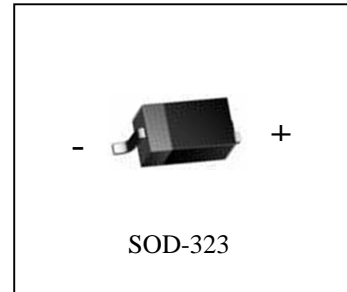

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Power Dissipation	$P_{tot}$	300	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	0.9	V

## MM3Z2V0~MM3Z75


### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Zener Voltage Range <sup>1)</sup>			Dynamic Impedance		Reverse Leakage Current	
	$V_{znom}$	$I_{ZT}$	for $V_{ZT}$	$Z_{ZT}$ (Max.)	at $I_{ZT}$	$I_R$ (Max.)	at $V_R$
	V	mA	V	$\Omega$	mA	$\mu\text{A}$	V
MM3Z2V0	2.0	5	1.8...2.15	100	5	120	0.5
MM3Z2V2	2.2	5	2.08...2.33	100	5	120	0.7
MM3Z2V4	2.4	5	2.28...2.56	100	5	120	1
MM3Z2V7	2.7	5	2.5...2.9	110	5	120	1
MM3Z3V0	3.0	5	2.8...3.2	120	5	50	1
MM3Z3V3	3.3	5	3.1...3.5	130	5	20	1
MM3Z3V6	3.6	5	3.4...3.8	130	5	10	1
MM3Z3V9	3.9	5	3.7...4.1	130	5	5	1
MM3Z4V3	4.3	5	4...4.6	130	5	5	1
MM3Z4V7	4.7	5	4.4...5	130	5	2	1
MM3Z5V1	5.1	5	4.8...5.4	130	5	2	1.5
MM3Z5V6	5.6	5	5.2...6	80	5	1	2.5
MM3Z6V2	6.2	5	5.8...6.6	50	5	1	3
MM3Z6V8	6.8	5	6.4...7.2	30	5	0.5	3.5
MM3Z7V5	7.5	5	7...7.9	30	5	0.5	4
MM3Z8V2	8.2	5	7.7...8.7	30	5	0.5	5
MM3Z9V1	9.1	5	8.5...9.6	30	5	0.5	6
MM3Z10	10	5	9.4...10.6	30	5	0.1	7
MM3Z11	11	5	10.4...11.6	30	5	0.1	8
MM3Z12	12	5	11.4...12.7	35	5	0.1	9
MM3Z13	13	5	12.4...14.1	35	5	0.1	10
MM3Z15	15	5	13.8...15.6	40	5	0.1	11
MM3Z16	16	5	15.3...17.1	40	5	0.1	12
MM3Z18	18	5	16.8...19.1	45	5	0.1	13
MM3Z20	20	5	18.8...21.2	50	5	0.1	15
MM3Z22	22	5	20.8...23.3	55	5	0.1	17
MM3Z24	24	5	22.8...25.6	60	5	0.1	19
MM3Z27	27	5	25.1...28.9	70	2	0.1	21
MM3Z30	30	5	28...32	80	2	0.1	23
MM3Z33	33	5	31...35	80	2	0.1	25
MM3Z36	36	5	34...38	90	2	0.1	27
MM3Z39	39	2.5	37...41	100	2	2	30
MM3Z43	43	2.5	40...46	130	2	2	33
MM3Z47	47	2.5	44...50	150	2	2	36
MM3Z51	51	2.5	48...54	180	2	1	39
MM3Z56	56	2.5	52...60	180	2	1	43
MM3Z62	62	2.5	58...66	200	2	0.2	47
MM3Z68	68	2.5	64...72	250	2	0.2	52
MM3Z75	75	2.5	70...79	300	2	0.2	57

<sup>1)</sup>  $V_Z$  is tested with pulses (20 ms).

## MM3Z2V0~MM3Z75 Typical Characteristics

Breakdown characteristics  
 $T_j = \text{constant (pulsed)}$

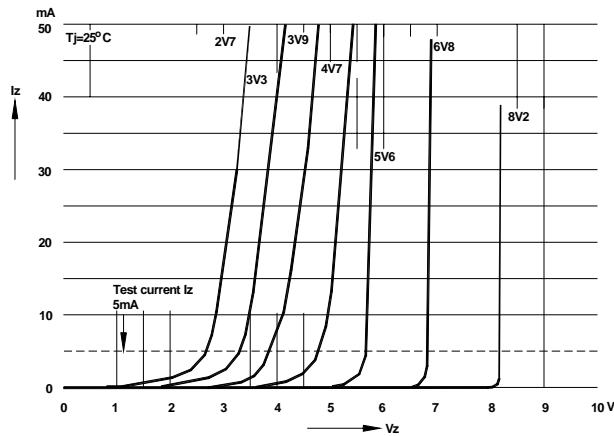

Breakdown characteristics  
 $T_j = \text{constant (pulsed)}$

