
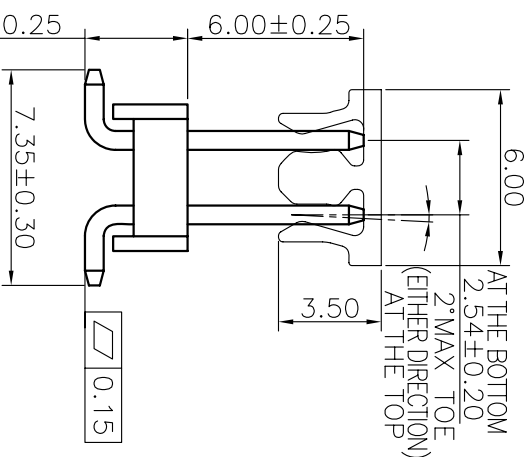


2.54 X No. of Positions ± 0.38

2.54 X No. of Contacts - 2.54 ± 0.25

2.54 ± 0.15
AT THE BOTTOM

2°MAX SWAY
(EITHER DIRECTION)
AT THE TOP

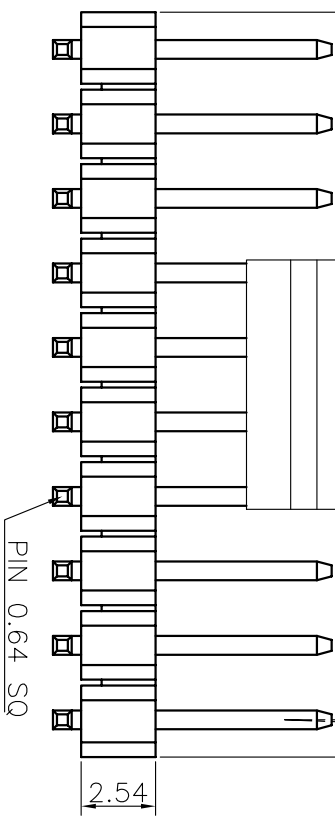

Ordering Information

G PHC201 - XX XX A 152 R 1 B X


No. Of Pins Per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
E=Cap+Tube
F=Cap+Tube&Reel

Dim.C	NOTE
5.00	02Pin
6.00	03~08Pin
8.50	09~40Pin

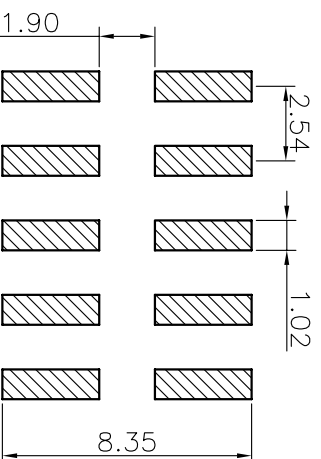

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free)
 All materials must meet Greencoan hazardous substances control standards.

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2013.12.20	李芳忠
02		長pin產品細曲嚴重,更改塑膠配方(CCR1401001)	2014.01.14	吳才仙
03		依業務要求變更塑膠配方(SSECR1409008)	2014.09.11	李芳忠

格菱股份有限公司
Greenco Corporation

GENERAL TOLERANCE

X. $\pm 5.0^\circ$	X. ± 0.30
X. $\pm 3.0^\circ$	X. ± 0.25
.XX $\pm 2.0^\circ$.XX ± 0.15
.XXX $\pm 1.0^\circ$.XXX ± 0.10

DESIGNED: 李芳忠 DATE: 2014.09.11

CHECKED: DATE:

CO SIGNED: 劉北平 DATE: 2014.09.11

APPROVED: DATE:

DWG. NO. GPHC201-CA152RB

PART NO. GPHC201-XXXX A152R1BX

TITLE:

2.54 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR

REV. 03 UNIT. mm SCALE. 4:1 PAGE. 1/1

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

1

2

3

4

5

6

7

8

9