
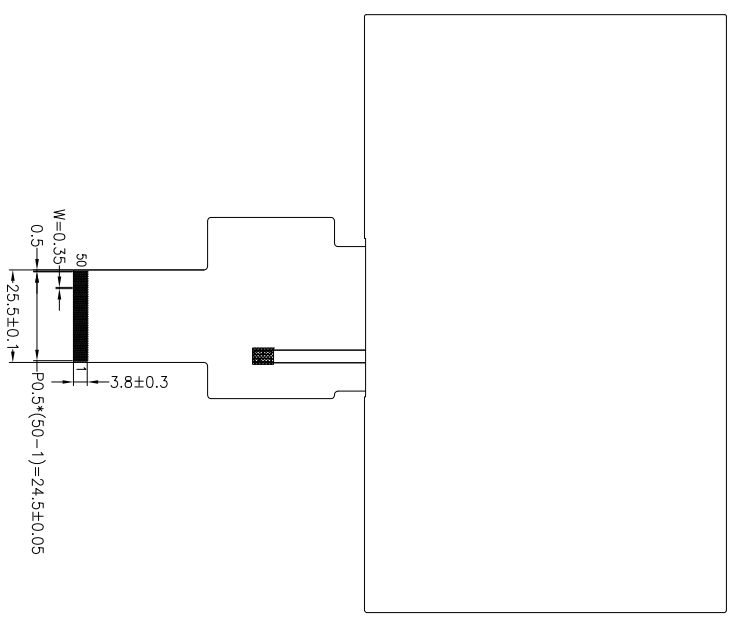



TFT PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	VLED+	26	G1
2	VLED+	27	G0
3	VLED-	28	R7
4	VLED-	29	R8
5	GND	30	R9
6	VCC	31	R4
7	VCC	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VSYNC	35	R0
11	HSYNC	36	GND
12	B7	37	CLK
13	B6	38	GND
14	B5	39	LR
15	B4	40	LD
16	B3	41	VCC
17	B2	42	VCC
18	B1	43	NC
19	B0	44	RESET
20	G7	45	NC
21	G6	46	NC
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

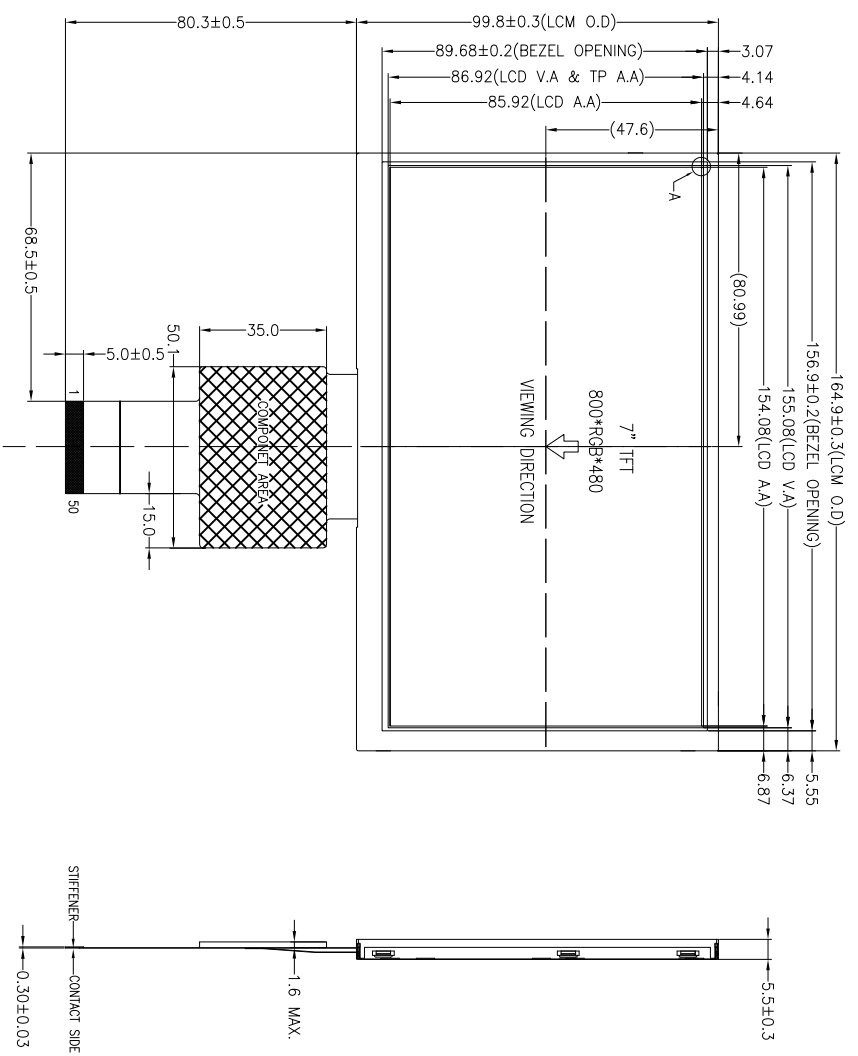

- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
  2. OPERATING VOLTAGE: VCC=3.3V.
  3. VIEWING DIRECTION: 12 O'CLOCK.
  4. DRIVER IC: HX8264+HX8664.
  5. OPERATING TEMP.: -20~70°.
  6. STORAGE TEMP.: -30~80°.
  7. LED BACKLIGHT: Z1-CHIP WHITE LED, IF=180mA, VF=9.6V@1.2V.
  8. SURFACE LUMINANCE: 500CD/M<sup>2</sup>(TYP).
  9. TREATMENT OF TOP SURFACE: ANTI-GLARE.
  10. GENERAL TOLERANCE: ±0.3.
  11. ROHS COMPLIANT.

		<b>MULTI-INNO TECHNOLOGY CO., LTD.</b>	
DRAWN BY: RITA CHECKED BY: APPROVED BY:	2019.09.27 2019.09.27 01	SCALE : 1/1 UNIT:	MODULE P/N: M0700S6T-13 DESCRIPTION: TFT MODULE
VER. 01 REVISIONS:	REVISIONS:	REVISIONS:	REVISIONS: