


◆ SPECIFICATION

DESCRIPTION	UL2896 - 20N × 60mm * 0,5p * (4/4 , 8/8) * (0,05*0,32) * P6		
KRT PART NO.		DRAWING NO.	

► CABLE TYPE (PATTERN 6)

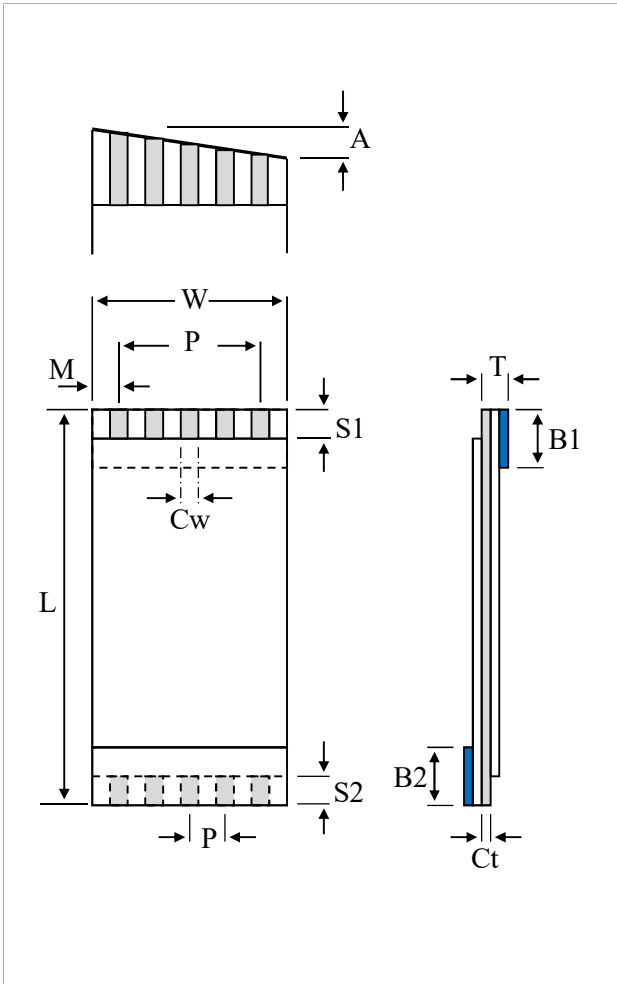

► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	0,5	± 0.05
NO. OF CONDUCTOR	N	20	-
CABLE LENGTH	L	60	± 3.00
STRIP LENGTH	S1	4	± 1.00
	S2	4	± 1.00
S/T LENGTH	B1	8	± 2.00
	B2	8	± 2.00
INSERT THICK	T	0,3	± 0.05
WIDTH	W	10,50	± 0.10
SPAN	PA	9,50	± 0.10
MARGIN	M	0,50	± 0.10
CONDUCTOR THICK	Ct	0,05	± 0.01
CONDUCTOR WIDTH	Cw	0,32	± 0.02
LESS THAN	A	0,5	-
PLATED	PL	$1\mu m \uparrow$	