


NA580

1U Rackmount Network Appliance Platform with LGA1151 Socket Intel® Xeon® E3/Core™ Family Processor and 8 LANs

Features

- LGA1151 socket 6th/7th gen Intel® Xeon® E3/Core™ family processor (Skylake/Kaby Lake)
- Four DDR4-2400 U-DIMM, up to 64GB memory
- Max. up to eighteen 10/100/1000 Mbps Ethernet ports
- One expandable LAN module supporting 1GbE/10GbE/Fiber/Copper/Bypass
- Supports 1U redundant power supply for optional
- Supports IPMI/TPM module for optional
- Suitable for network security, cloud computing and data centers applications

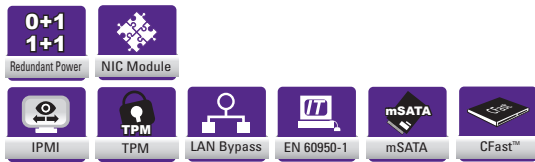


Specifications

System	
CPU	LGA1151 socket Intel® Xeon® E3/Core™ family processor (Skylake/Kaby Lake)
Chipset	Intel® C236/H110
Memory	Intel® C236: 4 x DDR4-2400 U-DIMM, up to 64GB non-buffer non-ECC/ECC memory Intel® H110: 2 x DDR4-2400 U-DIMM, up to 32GB non-buffer non-ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 2.5" SATA HDD 1 x CFast™ 1 x mSATA 1 x 3.5" SATA HDD (optional for 270 W ATX power supply only)
Network Interface	C236 PCH: 8 x 10/100/1000 Mbps Ethernet (Intel® i210) 10 x 10/100/1000 Mbps Ethernet (optional) 8 x RJ-45 + 2 x SFP (optional) H110 PCH: 6 x 10/100/1000 Mbps Ethernet (Intel® i210) 1 x LAN module (optional), max. up to 18 LANs
I/O Interface	1 x RS-232 (RJ-type) 2 x USB 3.0 8 x RJ-45
Other Features	LAN Bypass function through latch relay (two pairs)
Expansion Slot	1 x PCIe x8 (Intel® C236 only) through AX96708 (83967081010E) riser card
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	270 W ATX power supply 280 W 1U redundant power supply (optional)
OS Compatibility	Linux Kernel
Note : Kaby lake doesn't support Cent OS 6.6/6.7/6.8	

Mechanical/ Environmental

Form Factor	1U rackmount
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temp.	0°C ~ +45°C (+32°F ~ +113°F) (270 W ATX power supply) 0°C ~ +40°C (+32°F ~ +104°F) (280 W 1U redundant power supply)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	44 mm (1.73") (H) x 430 mm (16.93") (W) x 450 mm (17.7") (D)
Weight	8.5 kg (18.74 lb)/9.8 kg (21.61 lb)
Certificates	FCC class A/CE class A

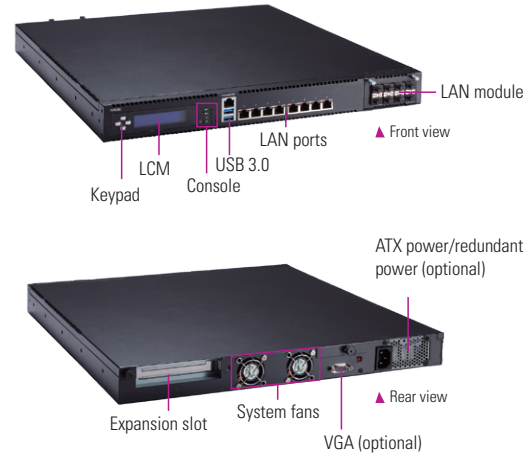

Ordering Information

Standard	
NA580-R8GI-C236 (P/N: E26E580100)	1U rackmount appliance with LGA1151 socket Intel® Xeon® E3/ Core™ family processor, 8 GbE LANs, 2 pairs LAN bypass and 1 expandable LAN module (optional)
NA580-R6GI-H110 (P/N: E26E580101)	1U rackmount appliance with LGA1151 socket Intel® Core™ family processor, 6 GbE LANs, 2 pairs LAN bypass and 1 expandable LAN module (optional)

Optional

5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco
--------------	---

* Specifications and certifications may vary contingent on options.

Packing List

- 1 x SATA cable
- 1 x Power cord

Dimensions

