
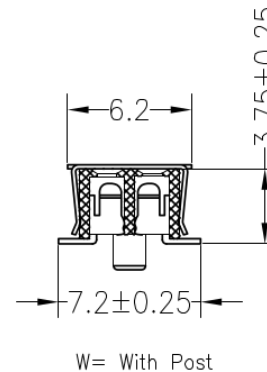
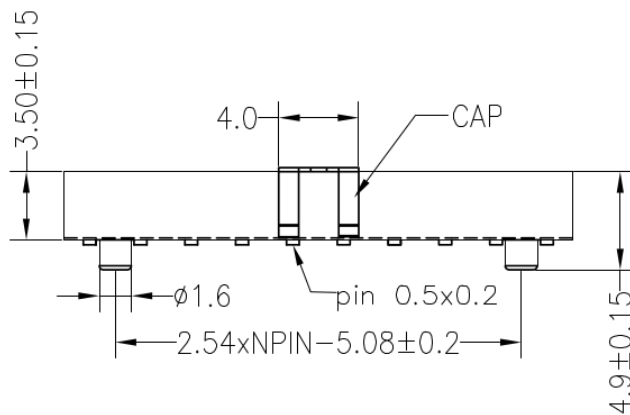
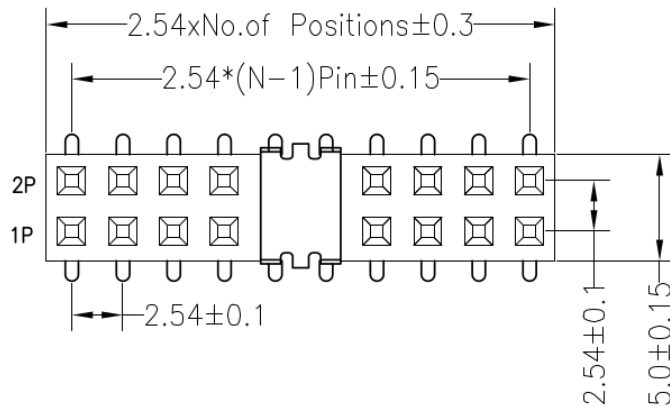


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

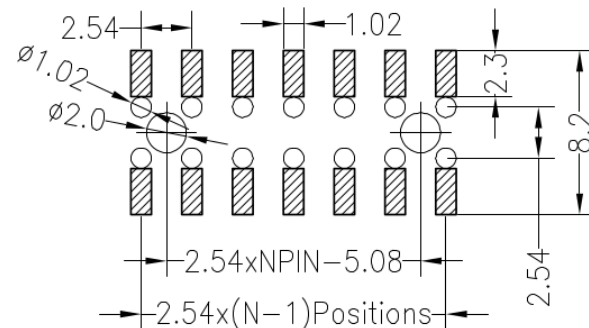

N= W/O Post

W= With Post

				OPERATION		DRAW	BEN	12.03.28	SCALE	FIT		
				X.X	±0.30	CHECK			UNIT	mm	PART NO.	
				X.XX	±0.20				SIZE	A4		
				X.XXX	±0.10				SHEET	1/1		
A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.54PF H3.5mm 2xNpin SMT
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL						
1	2	3	4	5	6	7	8	9				