客户料号：

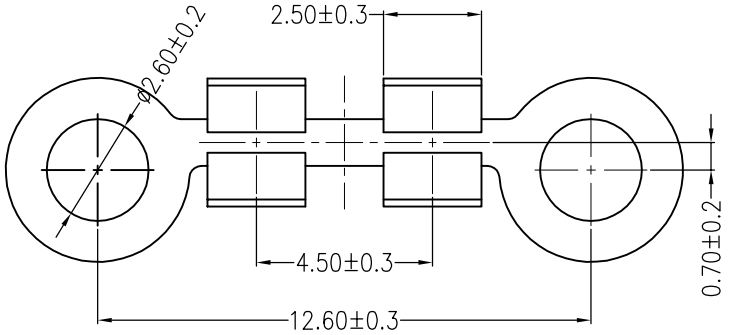

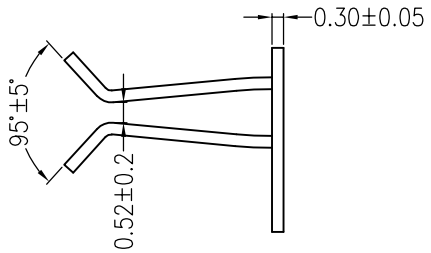

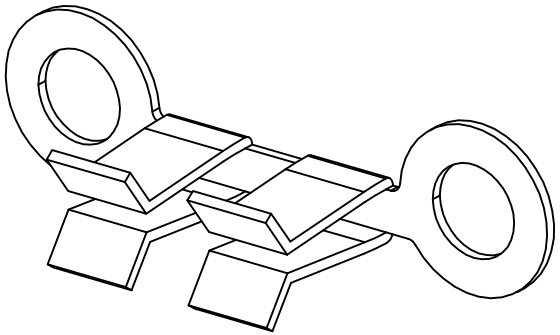

主要技术参数 Main Specifications

线　　数 (Poles): 02
接触电阻 (Contact resistance):≤20mΩ
绝缘电阻 (Insulation resistance):≥800MΩ
额定电压 (Rated voltage):250V AC DC
额定电流 (Rated current):2.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range) :-25℃～ +105℃

LEDsconn

LEDsconn	APPROVED BY		UNIT	TOLERANCE	REV	EC#.NO	REVISON RECORD	NAME	DATE	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
	邵敬和		mm	X.X ±0.30	A/0		NEW RELEASE	李 润	2014.04.16	A	Contacts	1	PhosphorBronze	Ni-plated
	CHECKED BY		SCALE	X.XX ±0.20	A/1		更改图框	李 润	2016.07.13	B				
	伏 何		FULL	X.XXX ±0.10						C				
MODEL NAME: 12.7mmPITCH	DRAWN BY	DATE	SHEET	ANGLE										
	李 润	2014.04.16	1/1	X° ±3.0°										