
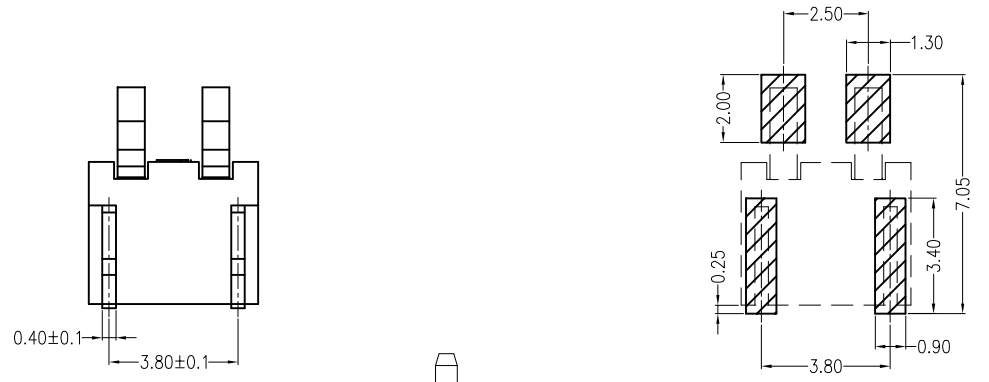



REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

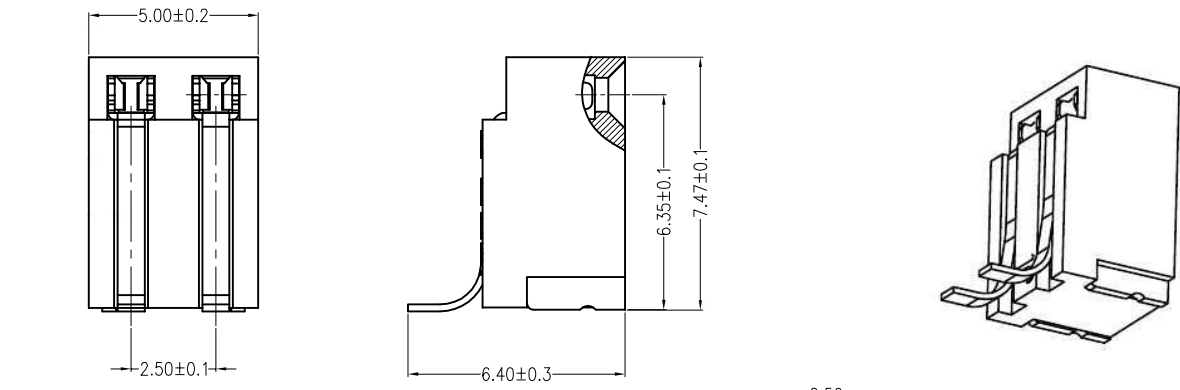

Board Layout
General Tolerance: ±0.05

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 04
- 接触电阻 (Contact resistance): ≤20mΩ
- 绝缘电阻 (Insulation resistance): ≥1000MΩ
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): -40°C ~ +120°C

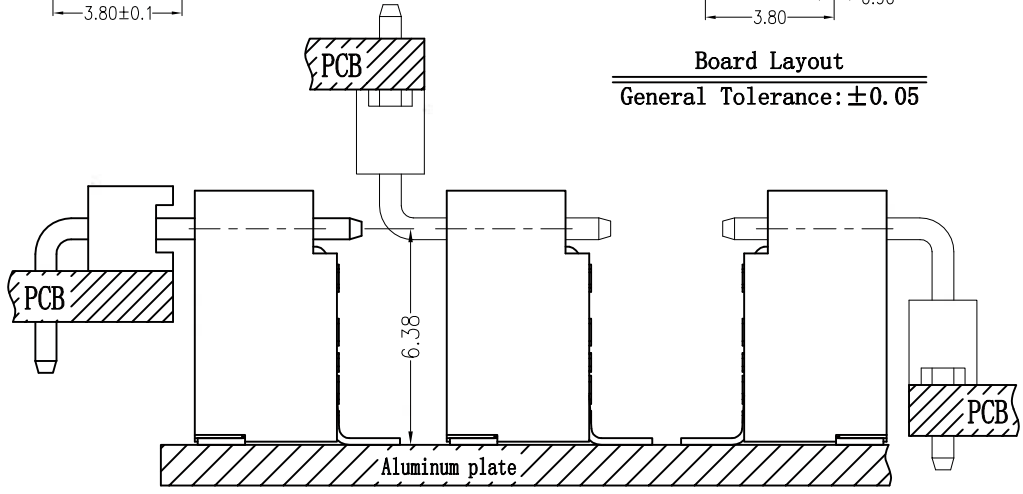

Assembly Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	Solder Tab	2 PCS	Brass	MATTE Sn-plated
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

LEDsconn			TITLE: - 2.5mmPITCH 90°WAFER SMT TYPE		
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2°				
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:		
--	--	CHKD: 田峰			
⊕	◁	UNITS: mm	DR: 蒋建银	SCALE: 1 : 1	SHEET: 1 / 1