

						<b>Leading Touch</b> DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: LINEAR TOL: .X=±1.0 .XX=±0.5 ANGULAR TOL: ±1°	MODEL TC-1555AP	PROJECTION 
							DESCRIPTION 15" 4-Wire Resistance Touch PC	SIZE: A4 SCALE 1:1 WEIGHT: Kg
							ASPECT RATIO 4:3	COLOR: WHITE
B								
A	FIRST ISSUE	18-11-11	Kevin	Bing	CLOUD			
REV.	DESCRIPTION	DATE	DRAW	CHECK	APPROVE	DRAWING NO.:	SHEET 1 OF 1	REV. A

1

2

3

4

5


6

I H G F E D C B A

I H G F E D C B A

## 15" Panel Mount All-in-One Touch Computer

# TC-1555

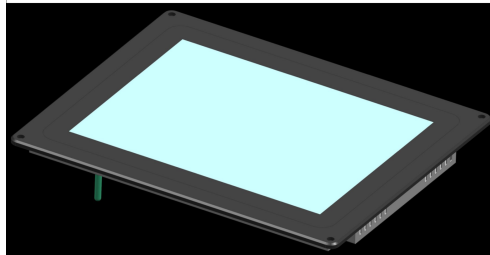

TC-1555 is 15inch panel mount All-in-One touch computer application, which is designed for Kiosks, Interactive digital signage, ATM, Gaming, Casino, Industrial, Education etc., is easily connected and installed by user.

### Features

- The front panel is made of aluminum
- High brightness LED panel
- Flat 5-wire resistive touch screen
- Efficient and stable intel computer system
- Standard VESA mounting and four side bracket options



### TC-1555 15inch All-in-One Touch Computer Specification

Product Model	TC-1555	
Product Description	15" All-in-One Touch Computer 5-wire resistive	
DISPLAY	Display	15" 4:3 Active Matrix TFT LCD
	Useful Screen Area	302mm x 226mm
	Optimal Resolution	1024 x 768
	Number of colors	16.7 million
	Brightness	450 cd/m <sup>2</sup>
	Contrast Ratio	800:1 (Typical)
	Viewing Angle	Horizontal: ±80° or 160° total
		Vertical: ±70° or 140° total
	CPU	Celeron J1900 1.99GHz
	RAM	4G
TOUCH	Harddisk	128 SSD or 500G STAT
	USB and COM Port	2 x USB 3.0, 4 x USB 2.0, 6 x COM (RS232) port
	Ethernet Port	1 x LAN RJ45 (Gigabit)
	Additional Video Out	1 x HDMI and 1 x VGA out
	Wireless	Wi-Fi 802.11 a/b/g/n/ac
	Bluetooth	Bluetooth 4.0
	Audio and Microphone	1 x 3.5mm line out, and 1 x microphone out
	Speaker	2x 12W internal speakers
	Touch Technology	5-wire resistive touch technology
	Response Time	3ms
Sealability	Touchscreen sealed to Aluminum alloy-bezel IP65	
	Touchscreen sealed to LCD	
MTBF	50,000 hours demonstrated	
Mounting Options	VESA Mount, four-side bracket and stand option	
Power Supply	100-240VAC, 50-60Hz	
Temperature Range	Operating: 0°C to 50°C; Storage: -20°C to 60°C	
Humidity Range (no condensing)	Operating: 20%-80%; Storage: 10%-90%	
Product Dimension	392mm x 320mm x 50.3mm	
Warranty	1 year	
Agency Approvals	FCC, CE, RoHS	