


| REV | DESCRIPTION | DESIGN | DATE |
|-----|-------------|--------|------|
| AO  | Release     | -      | -    |



**主要技术参数 Main Specifications**

- 线 数 (Poles): 01~03
- 适用线规 (Applicable Wire): 24~22#
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 275V AC DC
- 额定电流 (Rated current): 1A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range) :  $-40^{\circ}C \sim +110^{\circ}C$

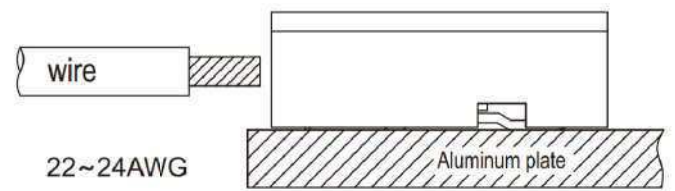

| ITEM | COMPONENT | Q'TY  | MATERIAL       | FINISH                |
|------|-----------|-------|----------------|-----------------------|
| C    |           |       |                |                       |
| B    | CONTACT   | 3 PCS | PhosphorBronze | Sn-plated             |
| A    | PEDESTAL  | 1 PCS | PA46           | UL 94V-0, COLOR:BEIGE |

|                 |        |               |           |             |             |
|-----------------|--------|---------------|-----------|-------------|-------------|
| <b>LEDsconn</b> |        |               | TITLE: -  |             |             |
| X.±0.5          | X.±5'  | USE: CUSTOMER | PART NO.: |             |             |
| .X±0.3          | .X±2'  |               |           |             |             |
| .XX±0.25        | .XX±1' | APPD: 邵敬和     | DWG NO.:  |             |             |
| --              | --     | CHKD: 田 峰     |           |             |             |
|                 |        | UNITS: mm     | DR: 蒋建银   | SCALE 1 : 1 | SHEET 1 / 1 |

