

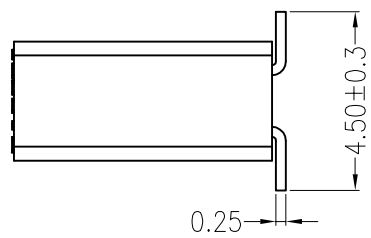
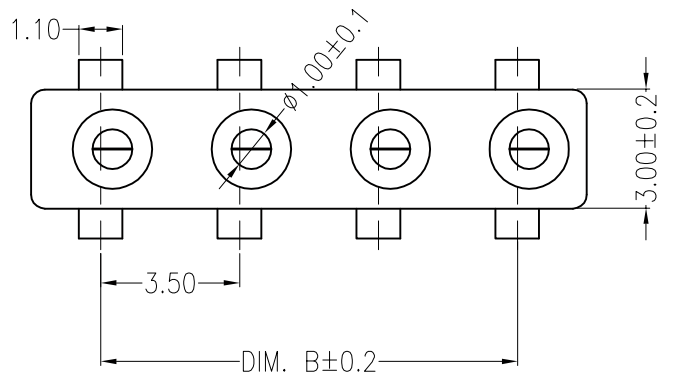


A B C D E F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release		2017.05.15

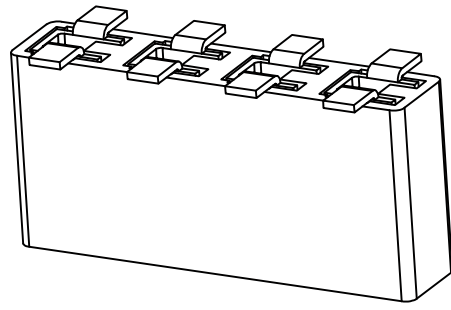


Circuit	DIM.A(mm)	DIM.B(mm)
01	3.50	
02	7.00	3.50
03	10.50	7.00
04	14.00	10.50

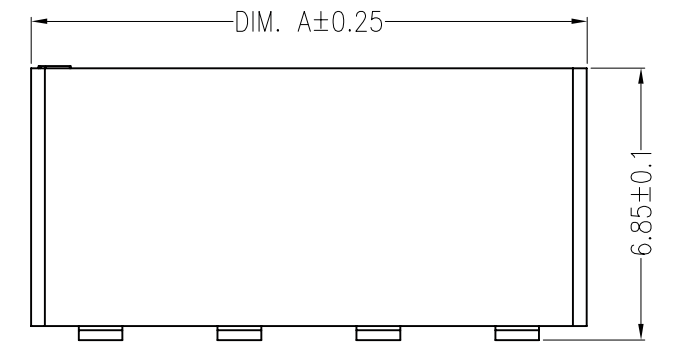

主要技术参数 Main Specifications

- 线数 (Poles): 01 to 04P
- 额定电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 800M\Omega$
- 额定电压 (Rated voltage): 250 V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

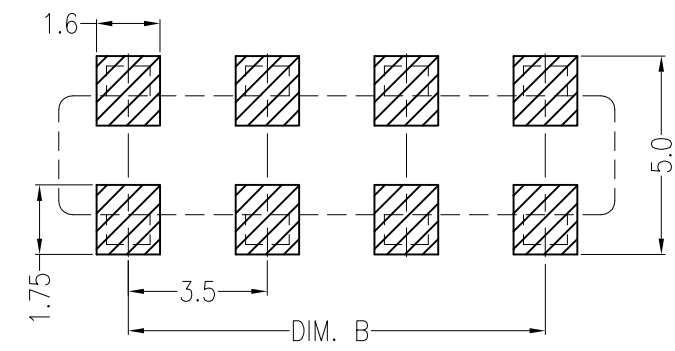

C				
B	CONTACT	1~4 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

LEDsconn			TITLE:		
			3.5mmPITCH 180°WAFER SMT TYPE		
X.±0.5	X.±5°	USE:	PART NO.:		
.X±0.3	.X±2°				CUSTOMER
.XX±0.25	.XX±1°	APPD:	DWG NO.:		
--	--	CHKD:			
⊕	⚡	UNITS:	DR:	SCALE	SHEET
		mm		1 : 1	1 / 1

A B C D E F