


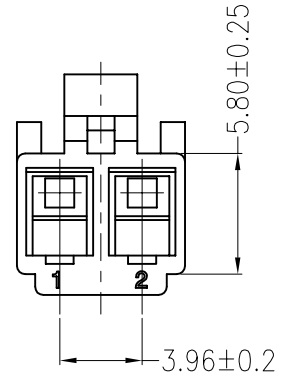


REV	DESCRIPTION	DESIGN	DATE
A0	Release		2017.08.26

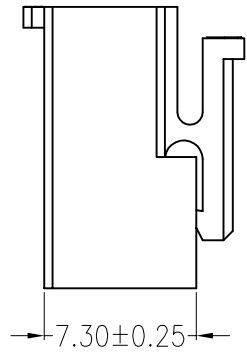

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 7.0A AC DC
 耐 电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

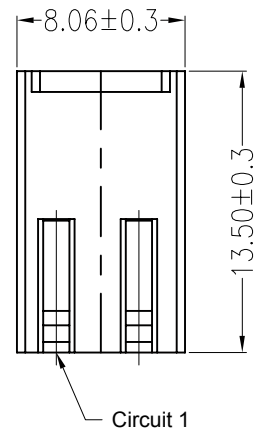

PEDESTAL		1 PCS	PA66	COLOR:WHITE
COMPONENT		Q'TY	MATERIAL	FINISH
LEDsconn				TITLE: - 3.96mmPITCH Housing
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:
.X±0.3	.X±2'	APPD:		DWG NO.:
.XX±0.25	.XX±1'	CHKD:		SCALE
--	--	DR:		SHEET
		UNITS: mm		1 : 1
				1 / 1