

# PICO318 NEW

Pico-ITX SBC with Intel® Pentium® Processor N4200 & Celeron® Processor N3350, DisplayPort, LVDS, 2 GbE LANs and Audio

## Features

- Intel® Pentium® processor N4200 & Celeron® processor N3350
- 1 DDR3L SO-DIMM for up to 8GB of memory
- 2 USB 2.0 and 2 USB 3.0
- 1 PCI Express Mini Card slot with mSATA supported
- M.2 Key B



### Core System


CPU	Intel® Pentium® processor N4200 & Celeron® processor N3350 onboard
System Memory	1 x 204-pin DDR3L-1867 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
SSD	1 x M.2 Key B (SATA, USB 2.0, PCIe x2 optional) in 22 x 42 or 30 x 42
Watchdog Timer	65536 levels, 1 to 65535 sec.
Expansion Interface	1 x Half-size PCI Express Mini Card slot with mSATA supported
Battery Lithium	Lithium 3V/220mAh
Power Input	1 x 4-pin connector +12V DC-in only AT Auto Power On function supported
Power Requirements	Intel® Pentium® N4200 @ 1.1 GHz 8GB DDR3L Max RMS: +12V @1.3A Intel® Celeron® N3350 @ 1.1 GHz 8GB DDR3L Max RMS: +12V @1.1A
Dimensions	100 x 72 mm
Board Thickness	1.6 mm
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Humidity	10% to 95% relative humidity, non-condensing

### I/O


SATA	N/A
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 x 10/100/1000 Mbps Ethernet with Intel® i211-AT; support Wake-on-LAN, PXE Boot ROM
Audio	HD Codec audio as Mic-in/Line-in/Line-out with Realtek ALC662
USB	2 x USB 2.0 2 x USB 3.0
Serial	1 x RS-232/422/485 1 x RS-232
TPM	N/A
SMBus	N/A
Others	1 x I <sup>2</sup> C
Digital I/O	4-channel in/out programmable

### Display


Chipset	Intel® integrated Gfx graphic engine
Memory Size	Share system memory
Display Interface	1 x LVDS; 18/24-bit single/dual channel 1 x DisplayPort

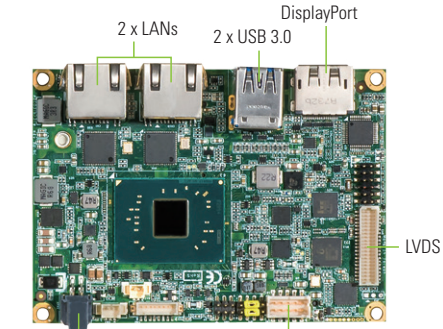

+12V power input 2 x USB 2.0 Half-size PCI Express Mini Card slot with mSATA supported M.2 Key B



▲ Side view



▲ Rear view



▲ Assembly view

### Packing List

#### Standard

Quick installation guide, user's manual/utility CD and accessories

#### Accessories

594H3160400E Power cable, L=100 mm

### Ordering Information

#### Standard

PICO318PGGA-N4200 (P/N: E38H318101)	Pico-ITX SBC with Intel® Pentium® processor N4200 (1.1 to 2.5 GHz, 2MB cache, 6W), DisplayPort, LVDS, 2 GbE LANs, 2 USB 2.0, and 2 USB 3.0 without heatsink
PICO318PGGA-N3350 (P/N: E38H318100)	Pico-ITX SBC with Intel® Celeron® processor N3350 (1.1 to 2.4 GHz, 2MB cache, 6W), DisplayPort, LVDS, 2 GbE LANs, 2 USB 2.0, and 2 USB 3.0 without heatsink

#### Optional

PICO318PGGA-N3350 (P/N: E38H318102)	Pico-ITX SBC with Intel® Celeron® processor N3350 (1.1 to 2.4 GHz, 2MB cache, 6W), DisplayPort, LVDS, 2 GbE LANs, 2 USB 2.0, 2 USB 3.0 and heatsink
PICO318PGGA-N4200 (P/N: E38H318103)	Pico-ITX SBC with Intel® Pentium® processor N4200 (1.1 to 2.5 GHz, 2MB cache, 6W), DisplayPort, LVDS, 2 GbE LANs, 2 USB 2.0, 2 USB 3.0 and heatsink
7128H316000E	Heatspreader
594H3160410E	Power cable for adapter, L=100mm
50966124050E	Adapter 12V 60W FSP060-DHAN3 with screw
59312260020E	Audio cable with bracket, P=1.25 mm, L=450 mm
59380880250E	COM port cable DB9-9 x 1-pin, P=1.25 mm, L=250 mm
59382631000E	2 x USB 2.0 cable with bracket, L=180 mm
594H3186800E	Buzzer cable 9 x 5.5 mm 2-pin, L=40mm
E93A19100	AX93A19 SIM card slot board