



PIN HEADER V/T TYPE

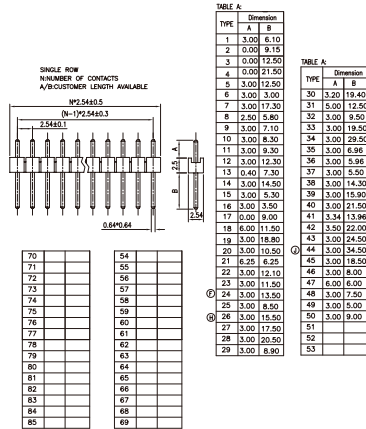

ULO-PH409

PITCH: 2.54mm



HOW TO ORDER


ULO-PH409 - X X X X

TABLE A & DIM. TYPE
 1: TYPE 1
 2: TYPE 2
 3: TYPE 3
 4: TYPE 4
 5: TYPE 5
 6: TYPE 6
 7: TYPE 7
 8: TYPE 8
 9: TYPE 9

CONTACT PLATING
 F1: FULL GOLD FLASH
 6: TIN

MOUNTING TYPE
 S: Straight TYPE

No. OF CONTACTS
 1*1~1*40

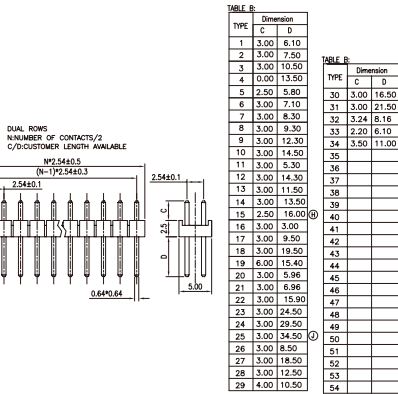

HOW TO ORDER


ULO-PH409 - X X X X

TABLE B & DIM. TYPE
 1: TYPE 1
 2: TYPE 2
 3: TYPE 3
 4: TYPE 4
 5: TYPE 5
 6: TYPE 6
 7: TYPE 7
 8: TYPE 8
 9: TYPE 9

CONTACT PLATING
 F1: FULL GOLD FLASH
 6: TIN

MOUNTING TYPE
 S: Straight TYPE

No. OF CONTACTS
 2*1~2*40

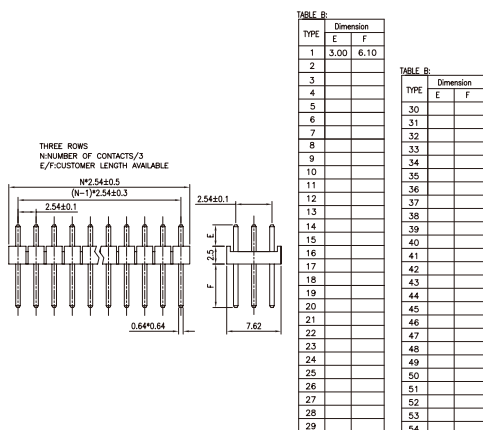

HOW TO ORDER

ULO-PH409 - X X X X

TABLE B & DIM. TYPE
 1: TYPE 1

CONTACT PLATING
 F1: FULL GOLD FLASH
 6: TIN

MOUNTING TYPE
 S: Straight TYPE

No. OF CONTACTS
 3*3~3*40

Specification	
Contact Resistance:	20mΩ Max
Dielectric Withstanding Voltage:	500V AC (rms) For 1 Minute
Insulation Resistance:	1000MΩ Min
Temperature Range:	-45°C~+105°C
Operating Temperature:	0°C~+85°C
Storage Temperature:	-20°C~+70°C
Material	
Insulator:	THERMOPLASTIC(UL 94V-0)
Contact Material:	Copper Alloy