



SPECIFICATION		
1	Model No.	CFGP12-E
2	Rated Voltage (V)	12
3	Operating Voltage (V)	3~16
4	*Rated Current (mA)	≤12
5	Reverse Current(mA)	≤100
6	*Sound Output at 10 cm (dB)	≥85
7	*Resonant Frequency (Hz)	4000±500
8	Operating Temperature (°C)	-20 ~ +70
9	Storage Temperature (°C)	-30 ~ +80
10	Weight (g)	0.8
11	Housing Material	PPO
12	Rohs	Yes

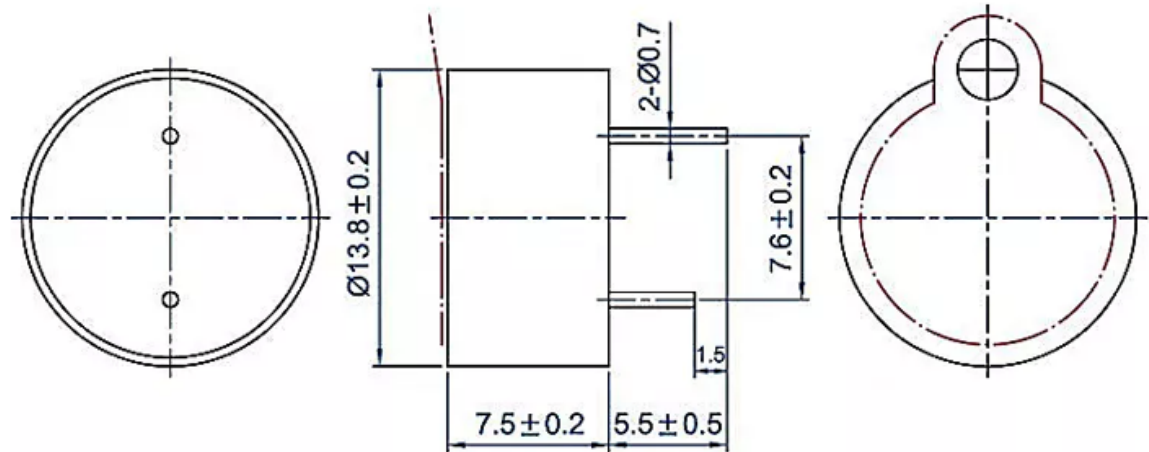

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
C			
B			

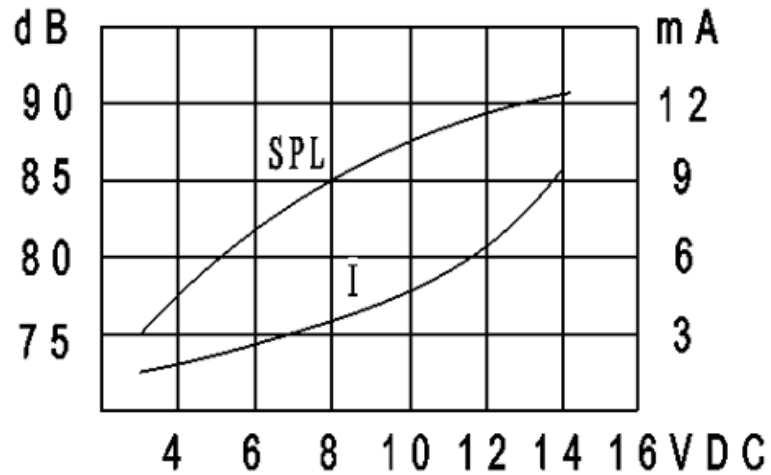

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE