
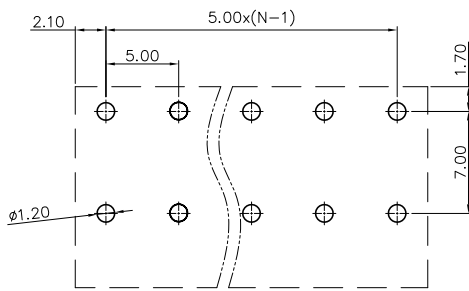

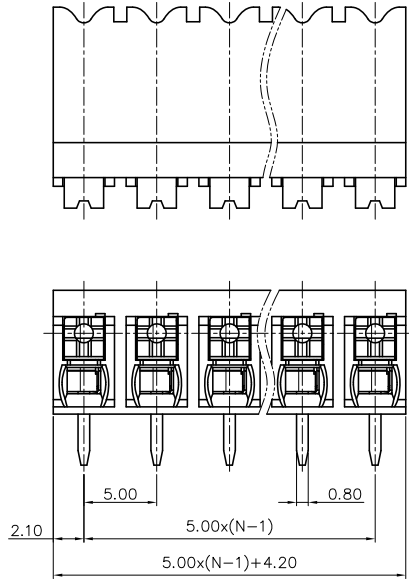


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

H  
G  
F  
E  
D  
C  
B  
A

H  
G  
F  
E  
D  
C  
B  
A



PCB LAYOUT

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 12A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Wire range : 24~16AWG

IEC Standard

1.	2	2	3
Pollution Degree	II	III	III
Overvoltage Category	4.0KV	4.0KV	4.0KV
Rate Impulse Voltage(KV)	500V	320V	250V
Rate Voltage(V)	17.5A		
Rate Current(A)			


- 2.Wire range : 0.2~1.5mm<sup>2</sup>

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.00mm, Poles : N=02~24P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+130°C
- 5.Undimensioned tolerances:

Fitch range in mm	Over 6	Over 10	Over 15	Over 24	Over 30	Over 60	Over 100	Over 150	0.1/10
TO	TO	TO	TO	TO	TO	TO	TO	TO	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

- 6.RoHS Compliance

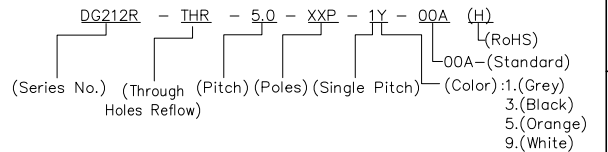

PART NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	/	NAME: DG212R-THR-5.0-XXP-1Y-00A(H)		
CHKD:	/	TITLE: CUSTOMER DRAWING		
DRFT:	/	DRAWING NO.:	REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE	1:1