







**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

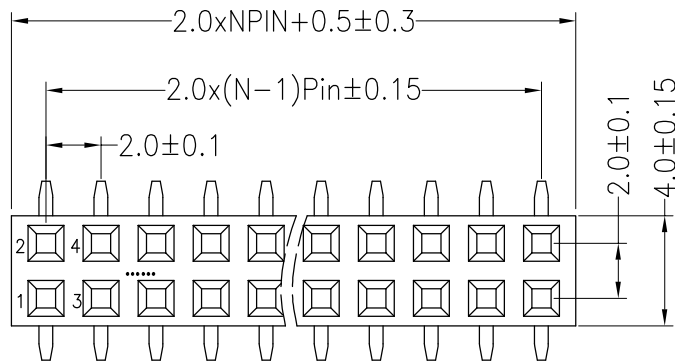

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

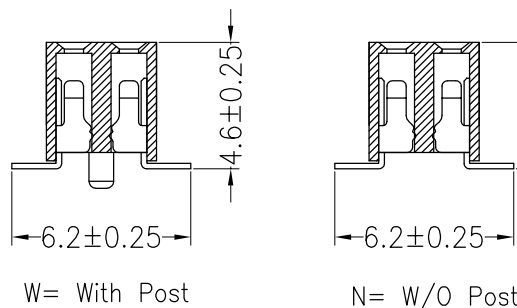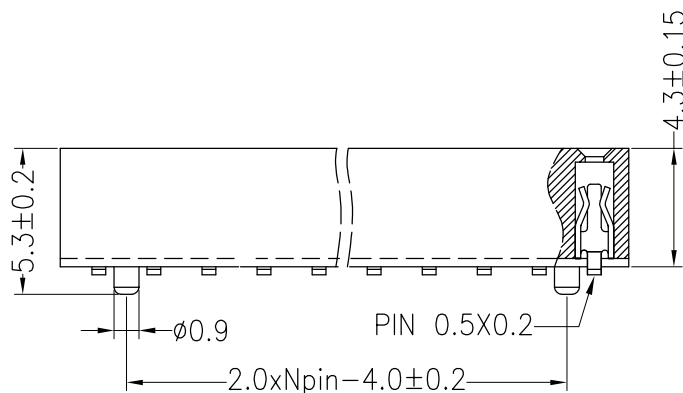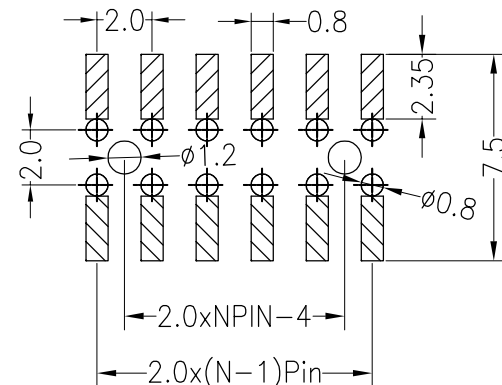

OPERATION		DRAW	Fengguodong	21.03.04	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

**CONN THERM**

PART NO. PBMTD-xxS-TR  
 TITLE: 2.00PF H4.3mm 2xNpin SMT W4.00

A

AO	2021.03.04	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

A

1 2 3 4 5 6 7 8 9