


# D 2010-TK

20x20x10mm(0.78"x0.78"x0.39")

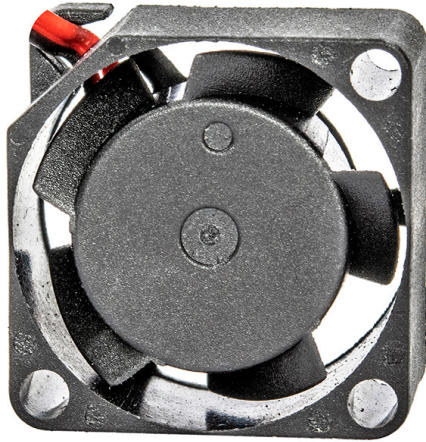


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
WEIGHT	4g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

20 mm

## SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D2010V12L-TK	12	0.03	0.36	10000	0.09	2.16	1.05	0.03	34.4
D2010V12M-TK	12	0.05	0.60	12000	0.10	2.65	1.14	0.03	37.1
D2010V12H-TK	12	0.08	0.96	14000	0.17	4.30	1.35	0.04	39.4
D2010V5L-TK	5	0.06	0.30	10000	0.09	2.16	1.05	0.03	41.0
D2010V5M-TK	5	0.08	0.40	12000	0.10	2.65	1.14	0.03	42.6
D2010V5H-TK	5	0.13	0.65	14000	0.17	4.30	1.35	0.04	44.7

DIMENSION

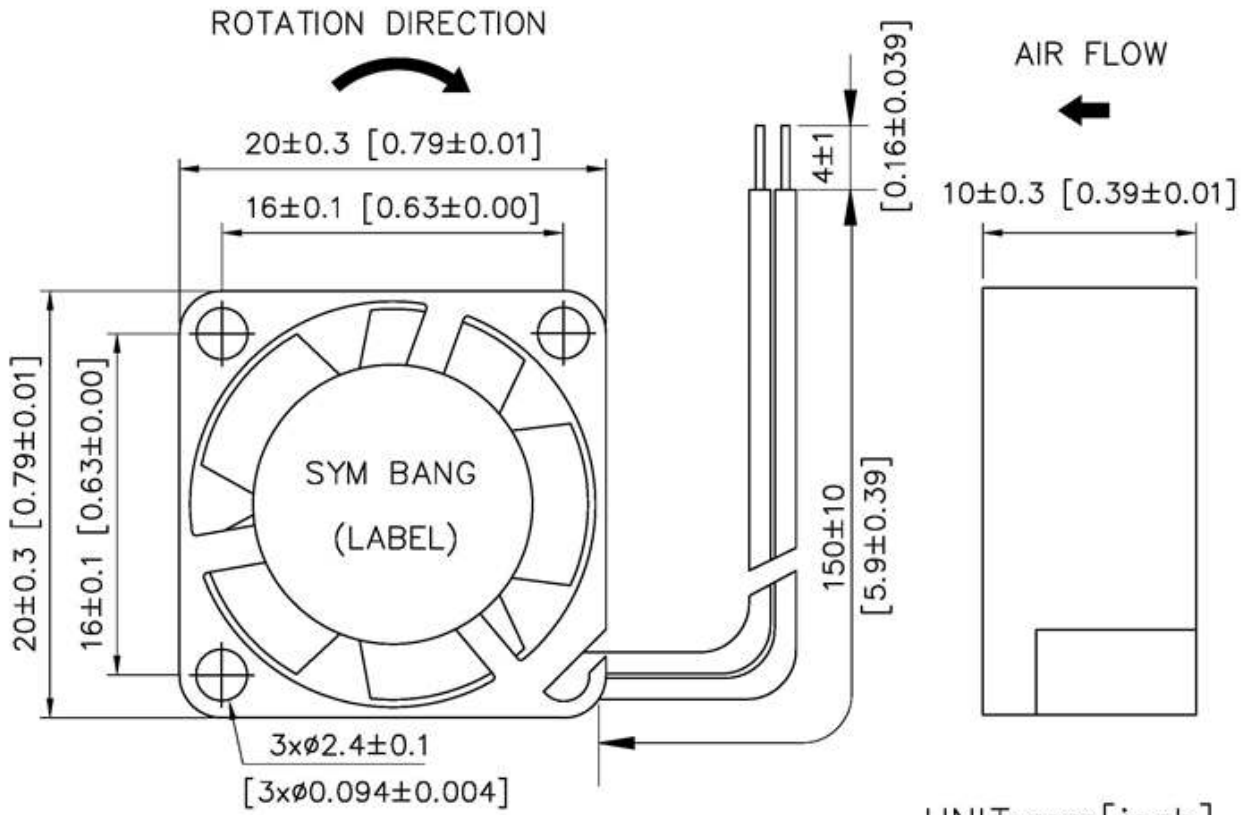

UNIT: mm[inch]

Mounting Panel Cutout  
Outlet Side & Inlet Side

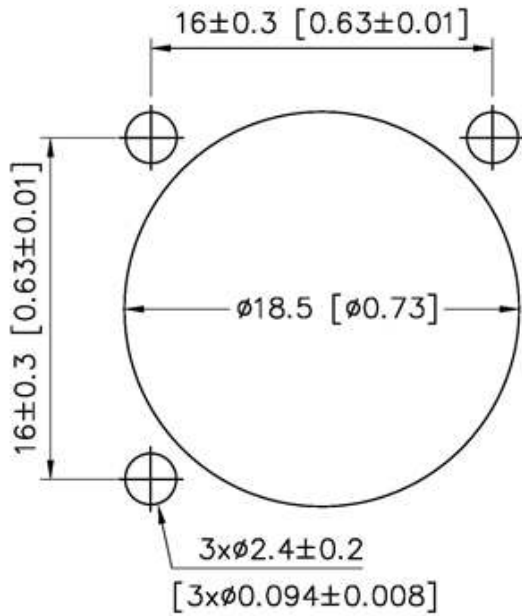

# AIR PERFORMANCE

