


# D 3010-K



30x30x10mm(1.18"x1.18"x0.4")

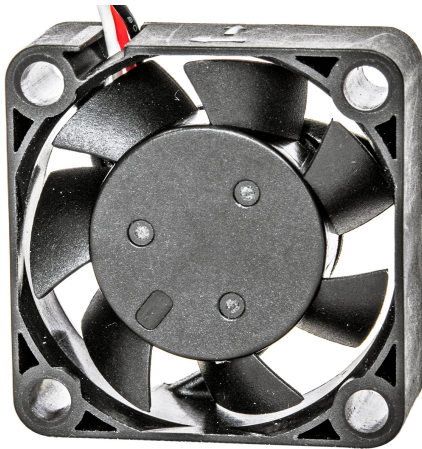


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	9 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

30 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D3010V5SL-K	5	0.27	1.35	11000	0.24	6.10	5.65	0.16	31
D3010V5H-K	5	0.24	1.20	9000	0.21	5.33	4.48	0.13	29
D3010V5M-K	5	0.12	0.60	7500	0.14	3.56	3.73	0.11	24
D3010V5L-K	5	0.09	0.45	6000	0.09	2.28	2.99	0.08	17
D3010V12SL-K	12	0.09	1.08	11000	0.24	6.09	5.65	0.16	31
D3010V12H-K	12	0.07	0.84	9000	0.21	5.33	4.48	0.13	29
D3010V12M-K	12	0.05	0.60	7500	0.14	3.65	3.73	0.11	24
D3010V12L-K	12	0.03	0.36	6000	0.09	2.28	2.99	0.08	17

## DIMENSION

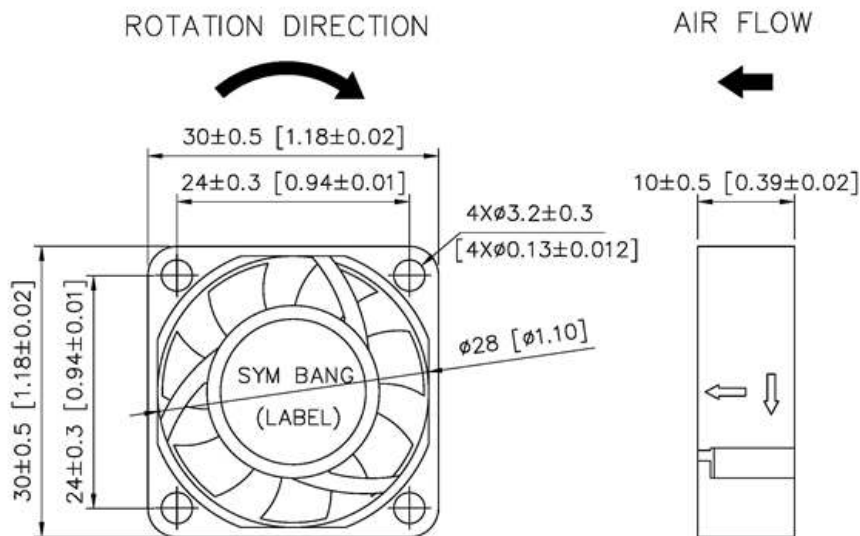

UNIT: mm[inch]

# AIR PERFORMANCE

