

# D 4007



40x40x7mm(1.57"x1.57"x0.28")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
WEIGHT	8 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

40 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4007V5HB	5	0.25	1.3	7500	0.13	3.25	6.51	0.18	34
D4007V5MB	5	0.23	1.2	6500	0.1	2.44	5.4	0.15	30
D4007V12HB	12	0.13	1.6	7500	0.11	2.89	6.51	0.18	34
D4007V12MB	12	0.11	1.3	6500	0.1	2.44	5.4	0.15	30

## DIMENSION

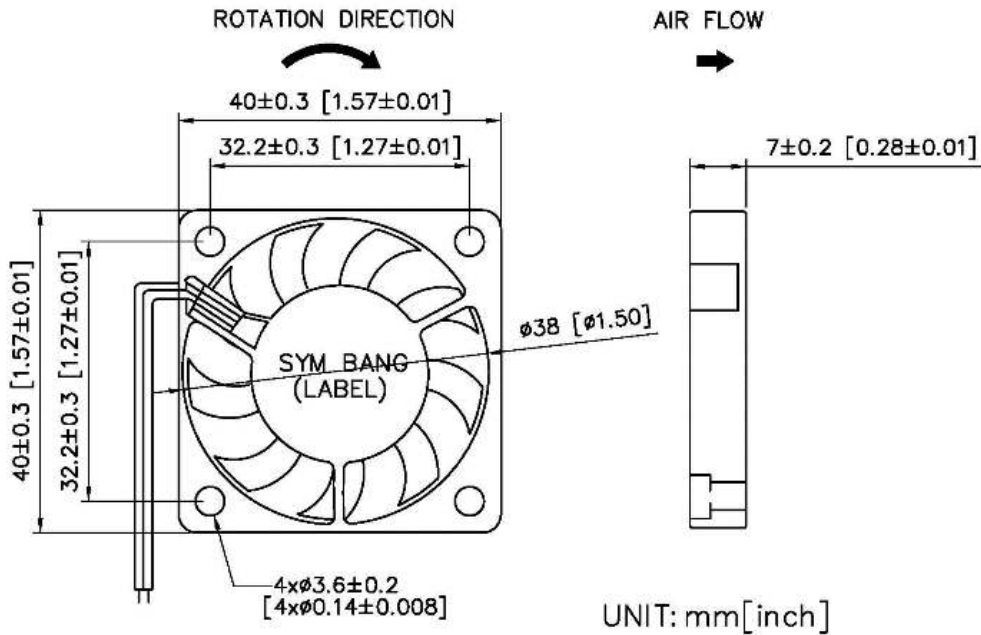

# AIR PERFORMANCE

