


D 4010



40x40x10mm(1.57"x1.57"x0.39")

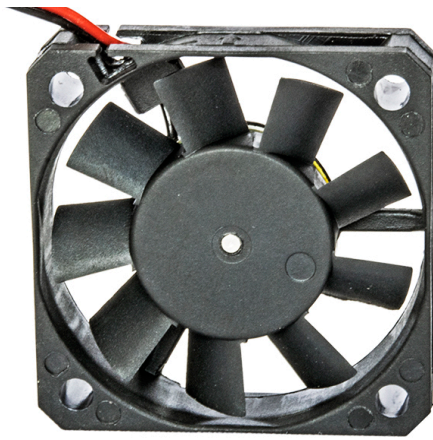


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	18 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4010V5H	5	0.23	1.15	6500	0.13	3.4	7.0	0.20	29.0
D4010V5M	5	0.18	0.90	5000	0.08	2.0	5.2	0.15	24.5
D4010V12H	12	0.13	1.56	6500	0.13	3.4	7.0	0.20	29.0
D4010V12M	12	0.09	1.08	5000	0.08	2.0	5.2	0.15	24.5
D4010V24H	24	0.11	2.64	6500	0.13	3.4	7.0	0.20	29.0

DIMENSION

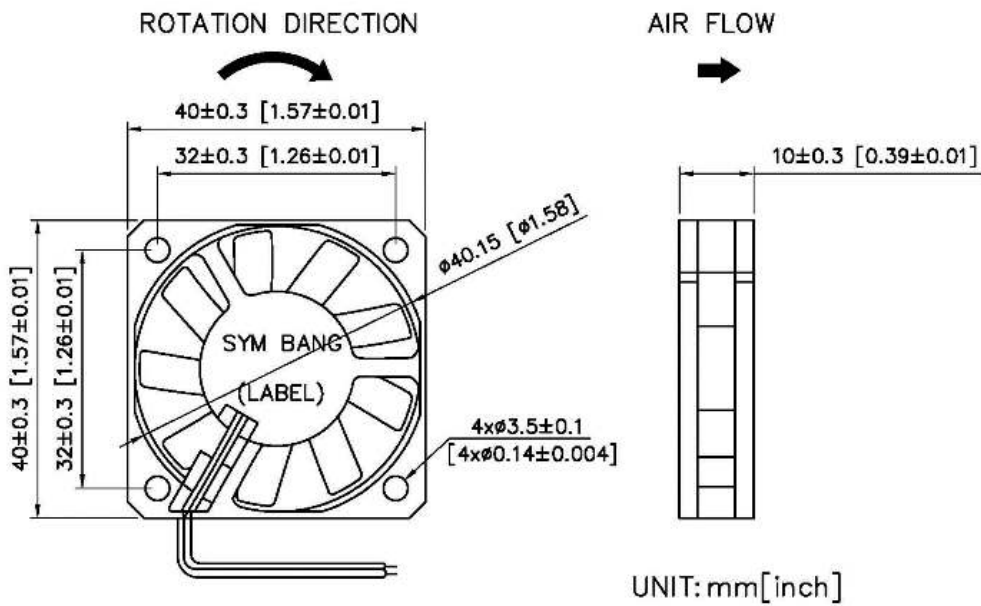

AIR PERFORMANCE

