


D 4020



40x40x20mm(1.57"x1.57"x0.79")

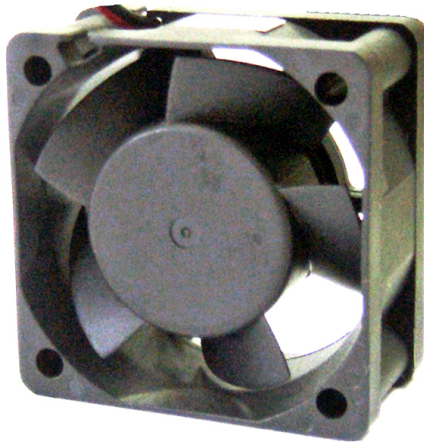


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	40 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

40 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4020V12H	12	0.16	1.92	7000	0.19	4.9	8.5	0.24	32.7
D4020V12M	12	0.1	1.2	6000	0.13	3.4	7.2	0.20	28.4
D4020V12L	12	0.08	0.96	5000	0.11	2.8	6.4	0.18	26.7
D4020V24H	24	0.18	4.32	7000	0.19	4.9	8.5	0.24	32.7
D4020V24M	24	0.13	3.12	6000	0.13	3.4	7.2	0.20	28.4
D4020V24L	24	0.1	2.4	5000	0.11	2.8	6.4	0.18	26.7

DIMENSION

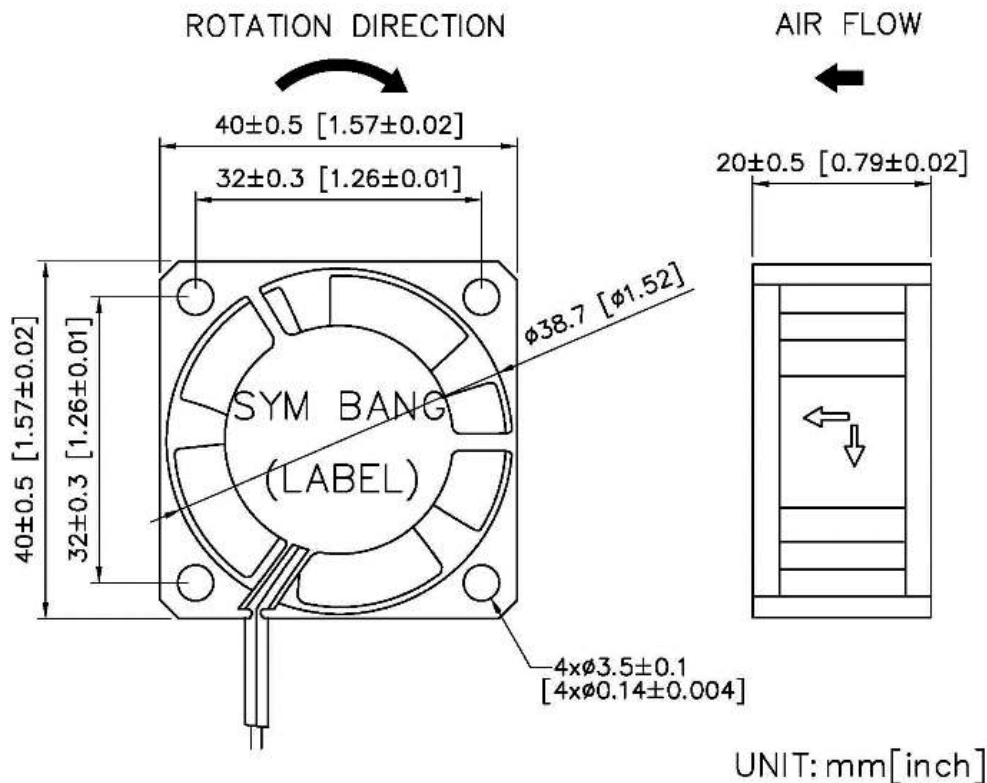



AIR PERFORMANCE

