


# D

# 4056-TK

40x40x56mm(1.57"x1.57"x2.2")

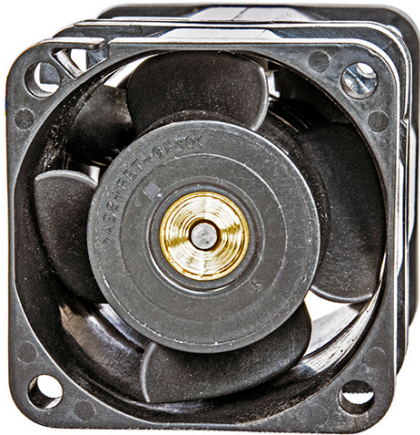

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
WEIGHT	90 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


# 40

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D4056V12M-TK	12	0.70	9.12	15000	2.30	58.30	27.30	0.77	56

## DIMENSION

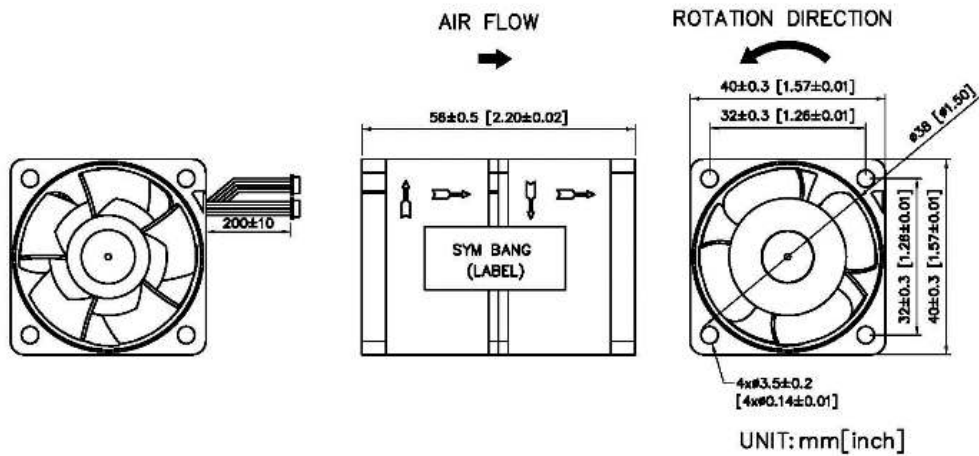

SYMBANG

# AIR PERFORMANCE

