

D 6010

60x60x10mm (2.36"x2.36"x0.39")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	30 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

60 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D6010V5H	5	0.35	2.10	4200	0.13	3.20	18.5	0.52	36.0
D6010V12SL	12	0.24	2.88	5100	0.15	3.72	24.4	0.69	38.0
D6010V12H	12	0.21	2.52	4700	0.12	3.10	19.1	0.54	36.2
D6010V12M	12	0.16	1.92	4200	0.11	2.90	17.7	0.50	35.0
D6010V12L	12	0.13	1.56	3600	0.08	2.10	15.6	0.44	29.0
D6010V12XL	12	0.16	1.92	3000	0.07	1.80	14.8	0.42	27.0
D6010V24H	24	0.16	3.84	4700	0.12	3.10	19.1	0.54	36.2
D6010V24M	24	0.15	3.60	4200	0.11	2.90	17.7	0.50	35.0

DIMENSION

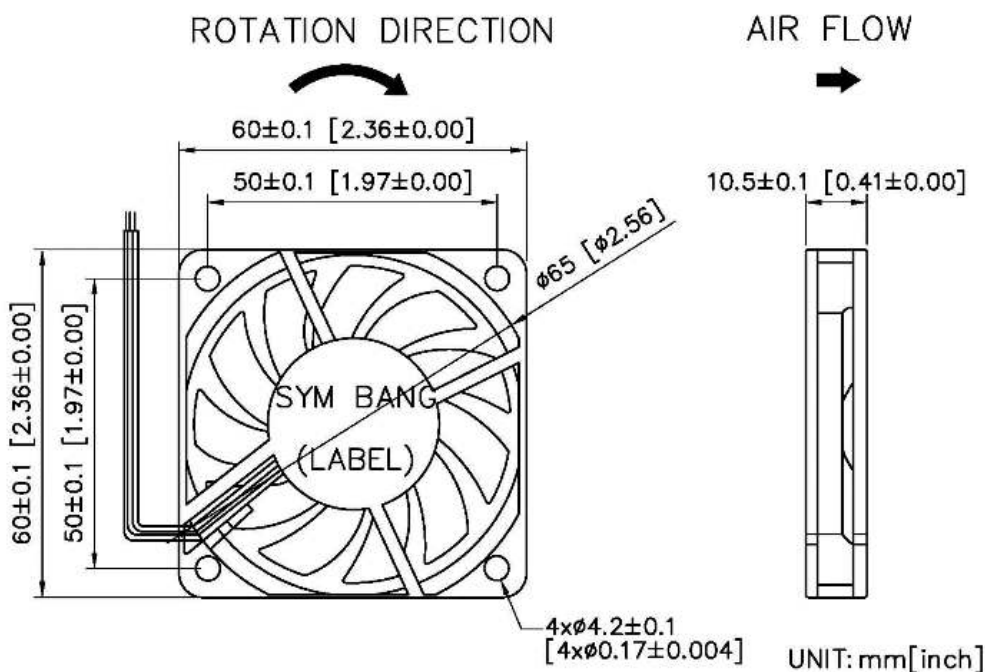

AIR PERFORMANCE

