

# D 7015-K



70x70x15mm(2.76"x2.76"x0.59")




HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	51 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

70 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D7015V12H-K	12	0.28	3.36	4300	0.22	5.5	33.5	0.95	39
D7015V12M-K	12	0.18	2.16	3800	0.17	4.3	29.6	0.84	35
D7015V12L-K	12	0.13	1.56	3300	0.13	3.3	25.7	0.73	31
D7015V12XL-K	12	0.11	1.23	2800	0.09	2.3	21.1	0.6	27

## DIMENSION

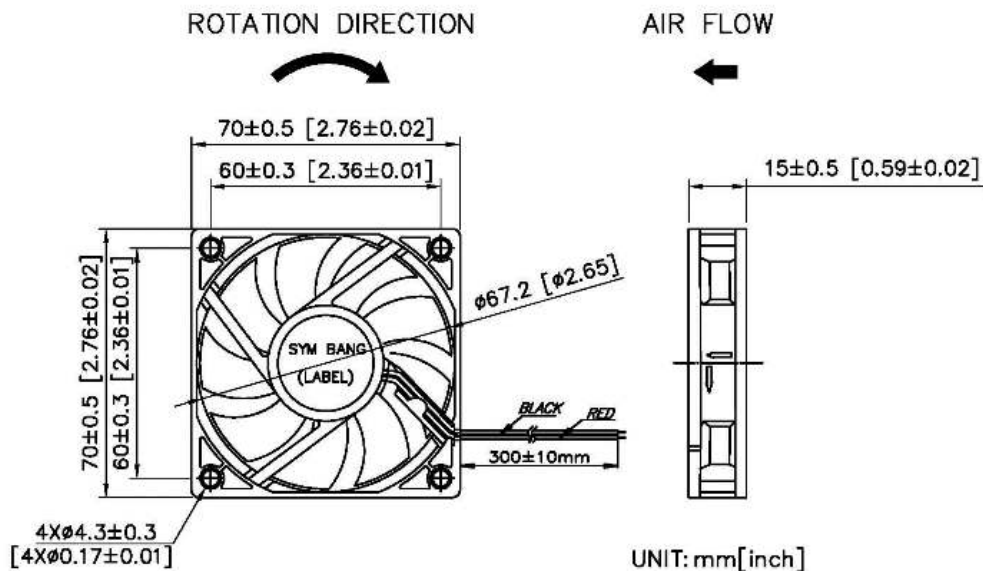

# AIR PERFORMANCE

