


DB

12137



121X121X37mm(4.76"X4.76"X1.46")

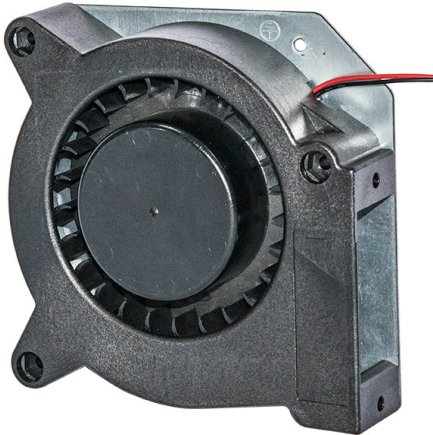

HOUSING	Thermoplastic PBT, UL94-0
IMPELLER	Thermoplastic PBT, UL94-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	500 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


121

 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB12137V12H	12	0.95	11.5	2800	0.75	19.05	26	0.73	55
DB12137V12M	12	0.63	7.5	2500	0.52	13.21	22	0.62	52
DB12137V24H	24	0.42	10.0	2800	0.75	19.05	26	0.73	55
DB12137V24M	24	0.31	7.5	2500	0.52	13.21	22	0.62	52
DB12137V48H	48	0.23	11.0	2800	0.75	19.05	26	0.73	55
DB12137V48M	48	0.16	7.7	2500	0.52	13.21	22	0.62	52

DIMENSION

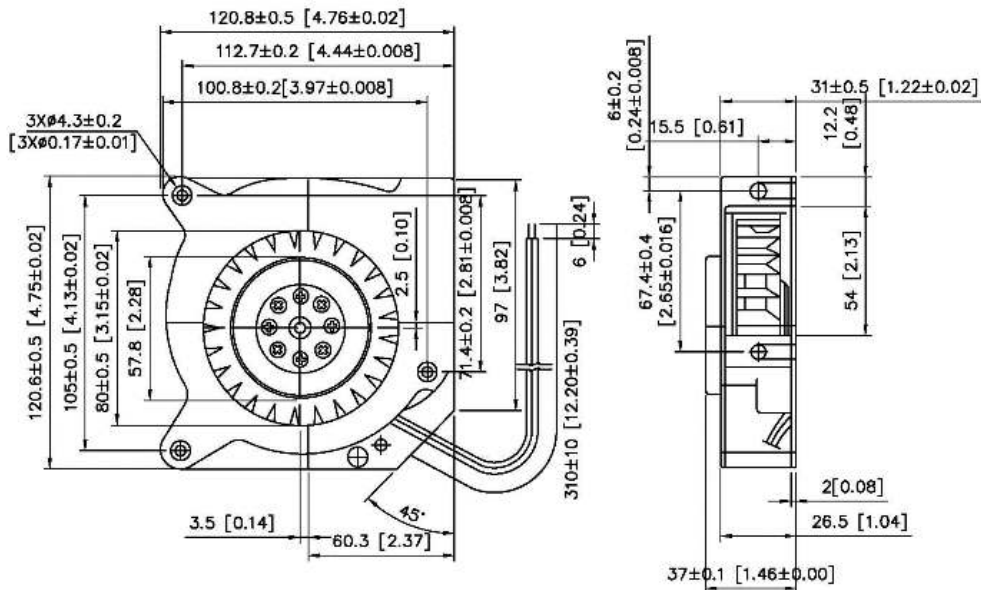

UNIT: mm[inch]

AIR PERFORMANCE

