


# A

# 12038-SA

120x120x38mm(4.72"x4.72"x1.5")

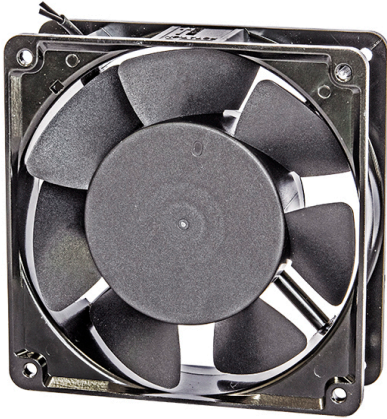

HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +70°
INSULATION	Class A
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	480 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


# 120

mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A12038V2L-SA	230	0.058/0.052	9.1/7.9	1600/1800	0.22/0.14	3.58/5.50	57/63	1.61/1.78	33/34
A12038V2M-SA	230	0.078/0.072	12/10.9	2000/2200	0.27/0.20	5.18/6.78	67/73	1.90/2.07	36/38
A12038V2H-SA	230	0.124/0.108	16.9/15	2550/2728	0.29/0.32	7.49/8.13	92/105	2.6/2.97	40/45
A12038V1H-SA	115	0.291/0.244	22/19.3	2550/2728	0.29/0.32	7.49/8.13	92/105	2.6/2.97	40/45

## DIMENSION

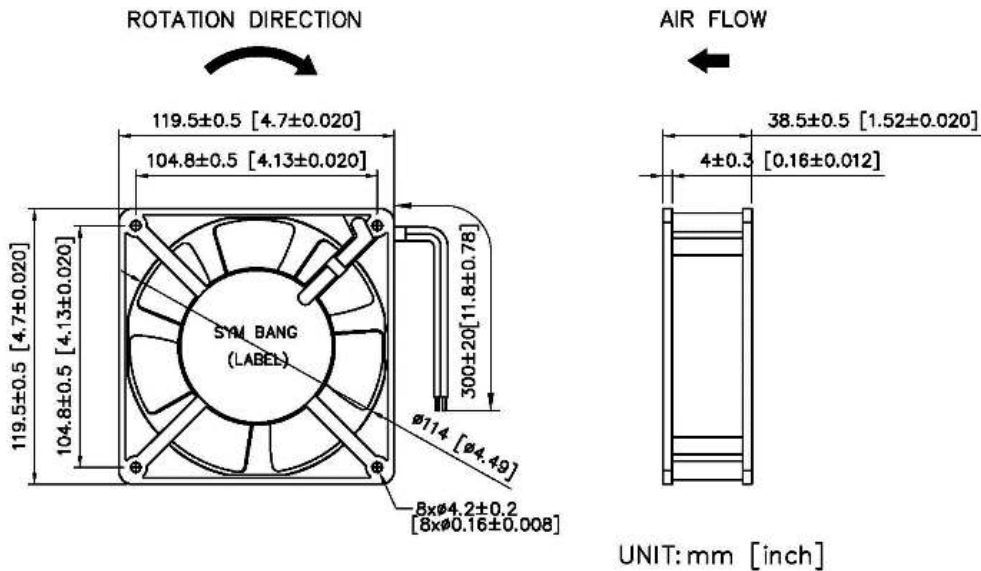

## AIR PERFORMANCE

