

# A

# 12038R-C

120x120x38mm(4.7"x4.7"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	550 g
ROHS COMPLIANCE	Yes
OPTIONAL FUNCTION	FG
IP LEVEL	IP21 (Special IP Rating On Request)

# 120mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A12038V1HR-C	115	0.24/0.18	19/15	2700/3000	0.23/0.28	5.84/7.11	83/87	2.35/2.47	42/47
A12038V1MR-C	115	0.13/0.12	11/10	2200/2500	0.19/0.15	4.83/3.87	76/78	2.15/2.20	37/39
A12038V1LR-C	115	0.11/0.10	9/8	2000/1800	0.16/0.15	4.06/3.81	54/52	1.50/1.40	34/30
A12038V2HR-C	230	0.13/0.11	21/18	2700/3000	0.23/0.28	5.84/7.11	83/87	2.35/2.47	42/47
A12038V2MR-C	230	0.11/0.09	18/15	2200/2500	0.19/0.15	4.83/3.87	76/78	2.15/2.20	37/39
A12038V2LR-C	230	0.08/0.06	13/10	2000/1800	0.16/0.15	4.06/3.81	54/52	1.50/1.40	34/30

## DIMENSION

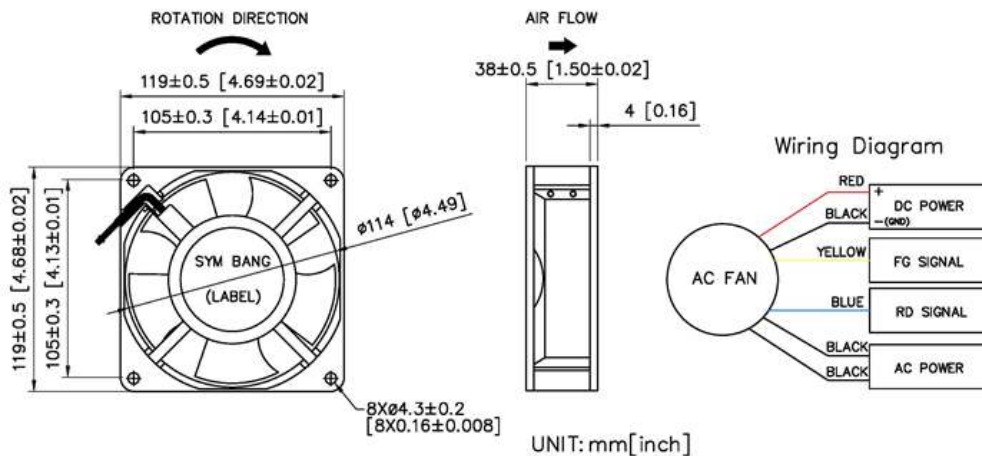

SYMBANG

## AIR PERFORMANCE

