

A

13538-TJ

135x135x38 mm(5.31"x5.31"x1.50") **CE**




HOUSING	Aluminum
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
TERMINATION	Terminals or Lead Wire
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Impedance Protected
WEIGHT	500 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

135 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A13538V2H-TJ	220	0.12/0.11	19/17	2450/2550	0.19/0.11	4.9/2.8	107/107	3.03/3.03	41/43
A13538V3H-TJ	380	0.07/0.06	19/17	2450/2550	0.19/0.11	4.9/2.8	107/107	3.03/3.03	41/43
A13538V1H-TJ	110	0.26/0.23	19/17	2450/2550	0.21/0.11	5.3/2.8	116/107	3.28/3.03	41/43

DIMENSION

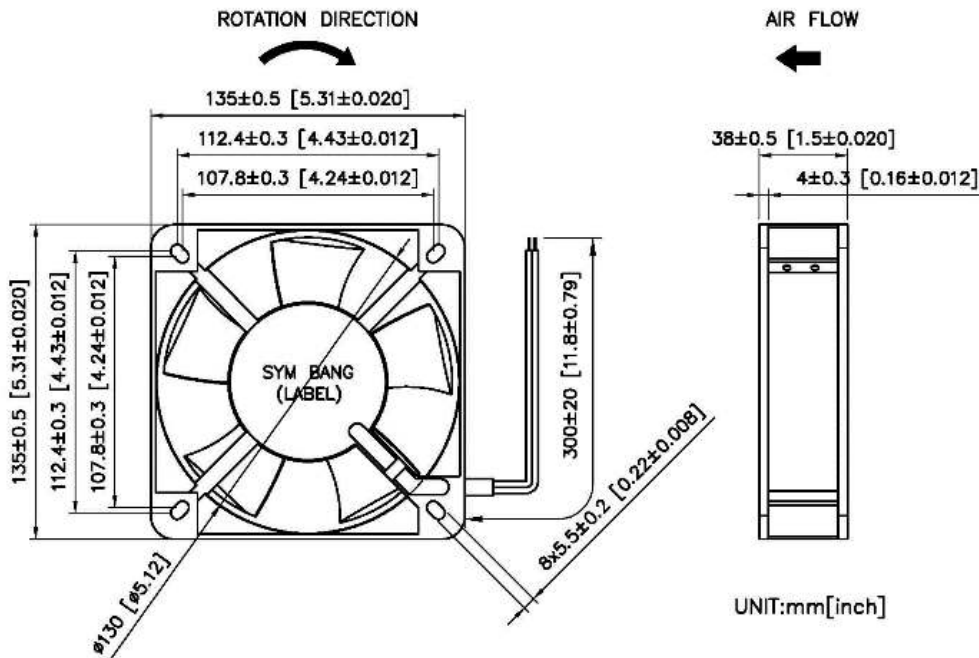

AIR PERFORMANCE

