

A

17051M-DA

CE

Ø172x51mm(Ø6.8"x2")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Metal
BEARING	Ball
OPERATING TEMPERATURE	-30°C to + 85°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1800 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1.08 kg
ROHS COMPLIANCE	Yes
OPTIONAL FUNCTION	FG, RD
IP LEVEL	IP54(Special IP Rating On Request)


172mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17051V1SLBM-DA	115	0.27/0.23	26.0/26.0	2800/3300	0.65/0.79	16.5/20.0	230/270	6.23/7.36	55/61
A17051V1HBM-DA	115	0.25/0.21	27.0/25.0	2700/3100	0.55/0.61	14.0/15.5	210/250	5.94/7.08	53/59
A17051V1MBM-DA	115	0.12/0.15	14.0/17.0	2400/2350	0.26/0.20	6.6/5.2	174/174	4.92/4.92	51/51
A17051V1LBM-DA	115	0.07/0.07	8.00/9.00	1800/1700	0.13/0.11	3.3/2.9	135/123	3.82/3.48	47/45
A17051V2SLBM-DA	230	0.10/0.11	23.0/26.0	2800/3300	0.65/0.79	16.5/20.0	230/270	6.23/7.36	55/61
A17051V2HBM-DA	230	0.11/0.12	26.0/27.0	2700/3100	0.55/0.61	14.0 / 15.5	210/250	5.94/6.79	53/59
A17051V2MBM-DA	230	0.07/0.10	16.0/19.0	2400/2350	0.26/0.20	6.6 / 5.2	174/174	4.92/4.92	51/51
A17051V2LBM-DA	230	0.04/0.05	10.0/11.0	1850/1700	0.13/0.11	3.4 / 2.9	135/123	3.82/3.48	47/45
A17051V280HBM-DA	280	0.11/0.11	27.0/26.0	2600/3000	0.47/0.43	12.0 / 11.0	200/230	5.66/6.51	52/58
A17051V3HBM-DA	380	0.06/0.06	22.0/23.0	2600/3000	0.47/0.43	12.0 / 11.0	200/230	5.66/6.51	52/58
A17051V4HBM-DA	440	0.08/0.07	29.0/27.0	2700/3100	0.53/0.57	13.5 / 14.5	210/240	5.94/6.79	53/59
A17051V480HBM-DA	480	0.07/0.07	33.0/31.0	2600/3000	0.47/0.43	12.0 / 11.0	210/240	5.94/6.79	53/59

SYMBANG

DIMENSION

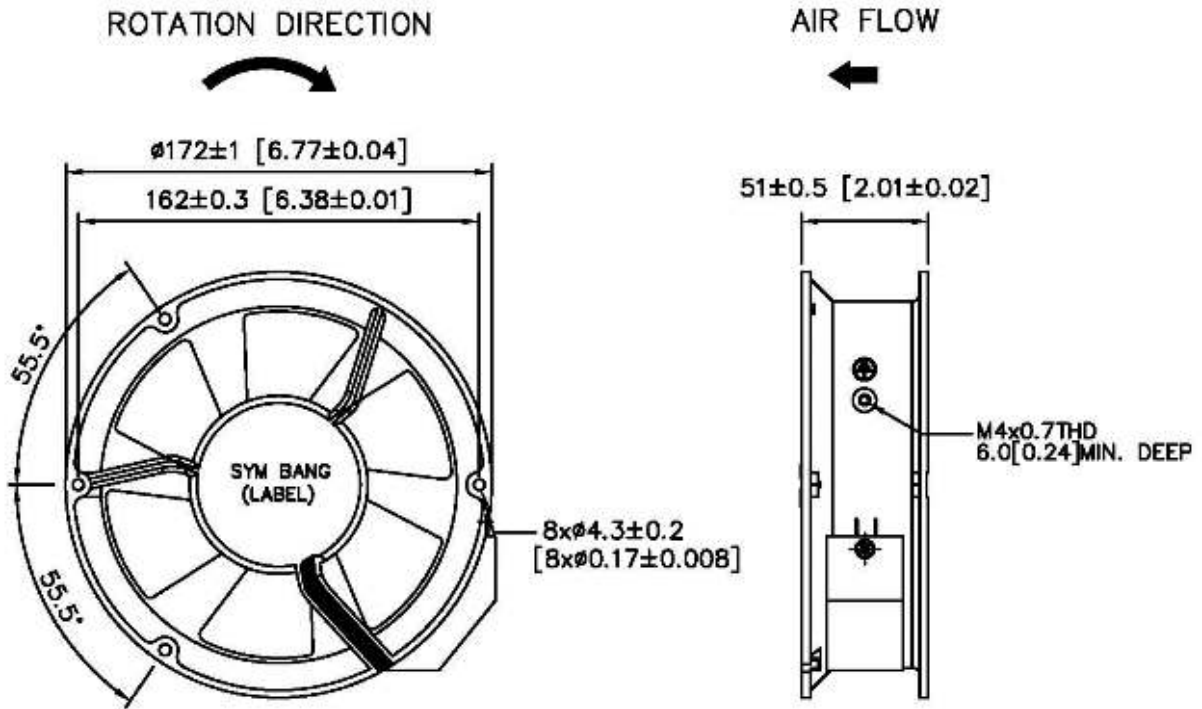

Mounting Panel Cutout
Outlet Side & Inlet Side

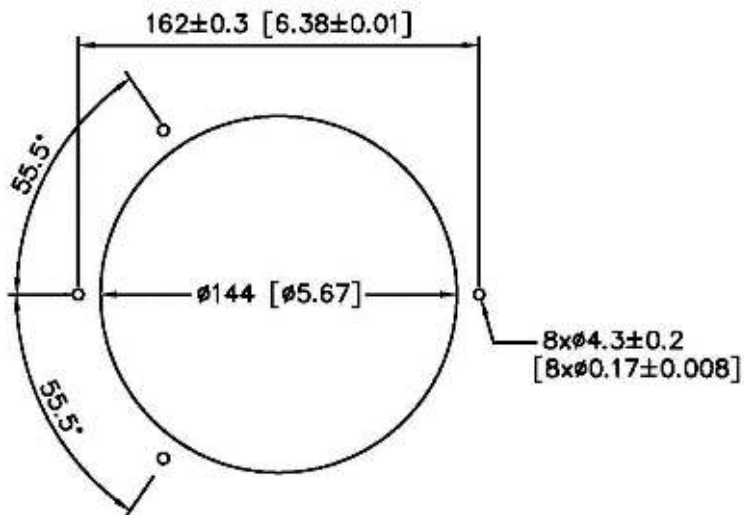

UNIT: mm [inch]

AIR PERFORMANCE

