

# A

# 22580M-7B

225x225x80mm(8.86"x8.86"x3.15")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Iron Leaf
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 105°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 125 VAC for 115V Type 200 VAC to 240 VAC for 220V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminal Block
WEIGHT	2.15 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

# 225 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A22580V1HBTM-7B	110	0.68/0.65	67/77	2700/3000	0.65/0.69	16.5/17.5	545/607	15.4/17.2	59/61
A22580V2HBTM-7B	220	0.35/0.28	62/80	2700/3000	0.65/0.69	16.5/17.5	545/607	15.4/17.2	59/61
A22580V3HBTM-7B	380	0.32	80	2700/3000	0.65/0.69	16.5/17.5	545/607	15.4/17.2	59/61

## DIMENSION

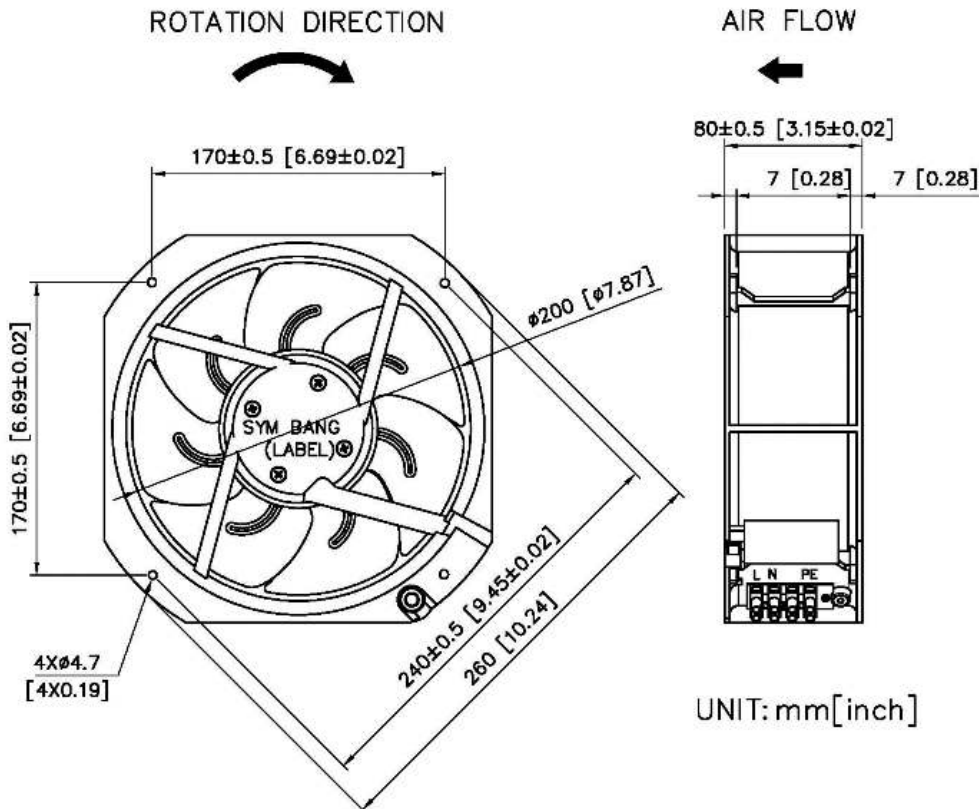

## AIR PERFORMANCE

