


AB

12137

121x121x37mm(4.76"x4.76"x1.46")

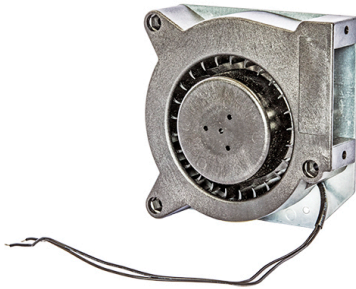

HOUSING

Spiral Housing of Fiberglass-Reinforced Polycarbonate

Housing Base of Galvanized Steel Plate

Thermoplastic PBT, UL94V-0

Ball or Sleeve

-10°C to + 70°C

Class A

85 VAC to 125 VAC for 115V Type

185 VAC to 245 VAC for 230V Type

5mA Max. at 1500 VAC for 1 second

IMPELLER

BEARING

OPERATING TEMPERATURE

INSULATION

OPERATING VOLTAGE RANGE

DIELECTRIC STRENGTH

INSULATION RESISTANCE

MOTOR TYPE

SAFETY

TERMINATION

WEIGHT

ROHS COMPLIANCE

IP LEVEL

10M Ω min. @500 VDC

Shaded Pole Motor

Impedance Protected

Lead Wire

625 g

Yes


IP21 (Special IP Rating On Request)

121 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB12137V1H	115	0.27/0.25	21/19	2500/2600	0.33/0.50	8.40/12.8	22/23	0.63/0.65	52/53
AB12137V2H	230	0.14/0.12	21/20	2500/2700	0.32/0.48	8.14/12.1	23/25	0.65/0.70	53/54

DIMENSION

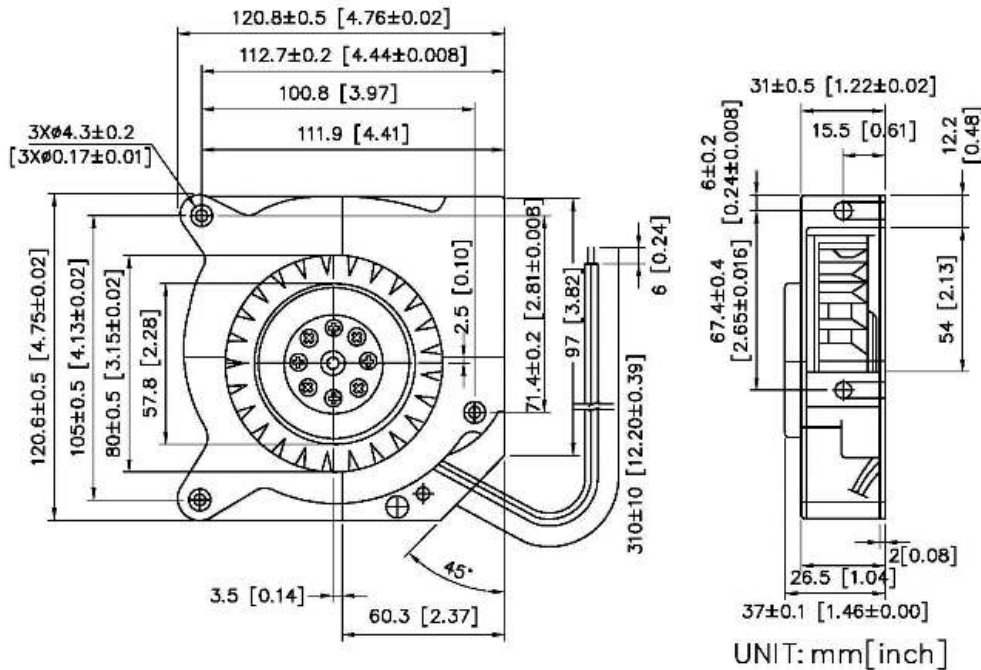

SYMBAND

AIR PERFORMANCE

