
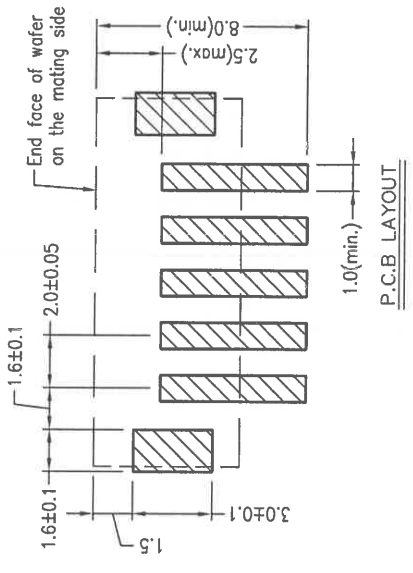
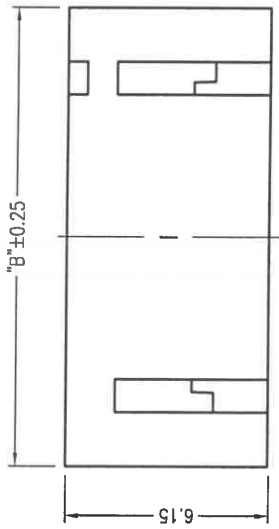



Poles	DIM.A	DIM.B
2P	2.0	8.0
3P	4.0	10.0
4P	6.0	12.0
5P	8.0	14.0
6P	10.0	16.0
7P	12.0	18.0
8P	14.0	20.0
9P	16.0	22.0
10P	18.0	24.0
11P	20.0	26.0
12P	22.0	28.0
13P	24.0	30.0
14P	26.0	32.0
15P	28.0	34.0
16P	30.0	36.0

- 技术参数 SPECIFICATIONS**
- ◆ 适用线规: AWG#24~#30
 - ◆ Applicable Wire: AWG#24~#30
 - ◆ 额定电压: 100V DC/AC(rms)
 - ◆ Rated voltage: 100V DC/AC(rms)
 - ◆ 额定电流: 2A (AWG #24)
 - ◆ Rated Current: 2A (AWG #24)
 - ◆ 耐压值: 800V AC/minute
 - ◆ Withstand voltage: 800V AC/min.
 - ◆ 工作温度: -25°C ~ +85°C
 - ◆ Working Temp: -25°C ~ +85°C
 - ◆ 绝缘电阻: ≥1000 MΩ
 - ◆ Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤10 mΩ
 - ◆ Contact resistance: ≤10 mΩ
 - ◆ 接触电阻: ≤10 mΩ
- 材料 MATERIAL**
- ◆ 绝缘体: 尼龙9T, UL94-V0
 - ◆ Insulator: Nylon9T, UL94-V0
 - ◆ 接触针: 黄铜
 - ◆ Contact PIN: Brass
 - ◆ 焊片: 磷铜
 - ◆ Solder tab: Phosphor bronze



GENERAL TOLERANCE	
XX. ±0.40	
X. ±0.30	
.X ±0.25	X.* ± 2*
.XX ±0.15	.X.* ± 1*

SCALE: 5:1	DRAWN: 柴艳妮	DATE: 2015.4.16
UNIT: mm	CHECK: 于腾	DATE: 2015.4.16
SIZE: A4	APPROVE: 肖志军	DATE: 2015.4.16

DOC. NO: JD-Y-E124	TITLE: 工程图	REV. A
PARTS NO: PH-LT-NA		SHEET: 1/1