





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C


Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

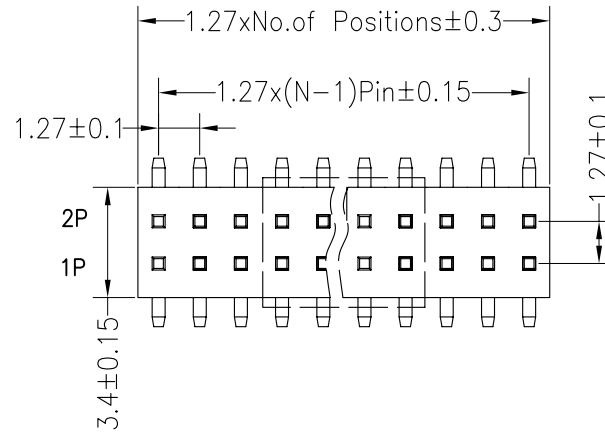

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

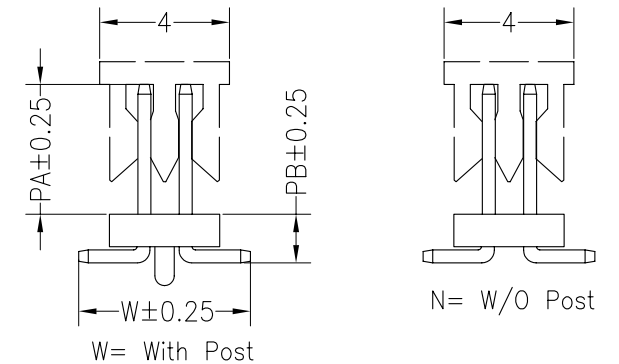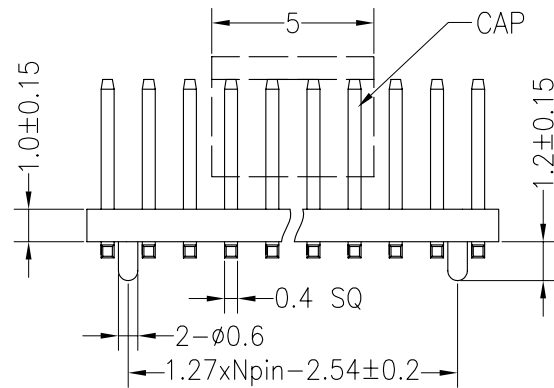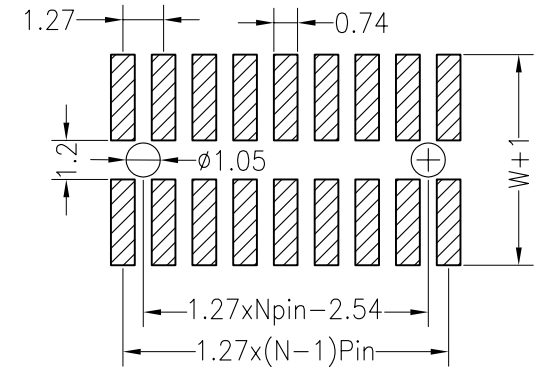

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.00	1.60	5.50	6.30
Alternate				

				OPERATION		DRAW	Ben	12.04.19	SCALE	FIT	CONNTERM		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	PLHTDxxS-JL			
				X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	1.27PH 2xNPin H1.0 SMT			
A0	2012.04.19	NEW DRAWING		Angle	±3°		PROJ.						
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL								