


Poles	DIM.A	DIM.B	DIM.C
2P	2.5	5.4	7.0
3P	5.0	7.9	9.5
4P	7.5	10.4	12.0
5P	10.0	12.9	14.5
6P	12.5	15.4	17.0
7P	15.0	17.9	19.5
8P	17.5	20.4	22.0
9P	20.0	22.9	24.5
10P	22.5	25.4	27.0
11P	25.0	27.9	29.5
12P	27.5	30.4	32.0
13P	30.0	32.9	34.5
14P	32.5	35.4	37.0
15P	35.0	37.9	39.5

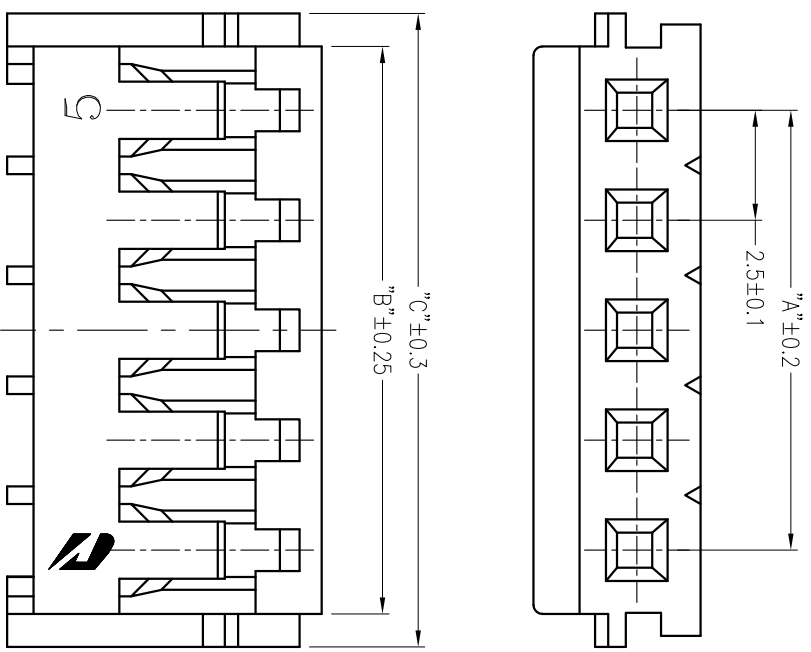

- 技术参数 SPECIFICATIONS
- ◆ 适用线规: AWG#22~#28
 - ◆ Applicable Wire: AWG#22~#28
 - ◆ 额定电压: 250V AC,DC(rms)
 - ◆ Rated voltage: 250V AC,DC(rms)
 - ◆ 额定电流: 2.5A (AWG#22)
 - ◆ Rated Current: 2.5A (AWG#22)
 - ◆ 耐压值: 800V AC/minute
 - ◆ Withstand voltage: 800V AC/minute
 - ◆ 工作温度: -25°C ~ +85°C
 - ◆ Working Temp : -25°C ~ +85°C
 - ◆ 绝缘电阻: $\geq 1000 \text{ M}\Omega$
 - ◆ Insulation resistance: $\geq 1000 \text{ M}\Omega$
 - ◆ 接触电阻: $\leq 10\text{m}\Omega$
 - ◆ Contact resistance: $\leq 10\text{m}\Omega$
- 材料 MATERIAL
- ◆ 绝缘体: 尼龙66, UL94-V2
 - ◆ Insulator: Nylon66, UL94-V2

JIMDA
Dongguan Jinda Electronics Co., Ltd
东莞市津达电子有限公司

GENERAL TOLERANCE	
XX: ± 0.40	
X: ± 0.30	
.X: ± 0.25	X: $\pm 2^\circ$
.XX: ± 0.15	.X: $\pm 1^\circ$

SCALE: 6:1	DRAWN: 柴艳妮	DATE: 2014.1.13
UNIT: mm	CHECK: 于腾	DATE: 2014.1.13
SIZE: A4	APPROVE: 肖志军	DATE: 2014.1.13

DOC. NO: JD-Y-E107	TITLE: 工程图	REV. A
PARTS NO: EH-NY		SHEET: 1/1