
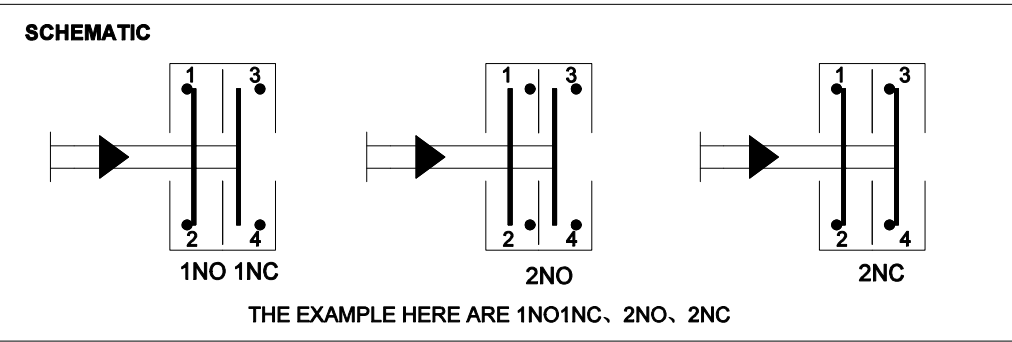


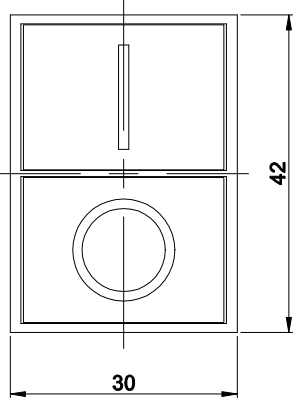


1 2 3 4 5 6 7

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

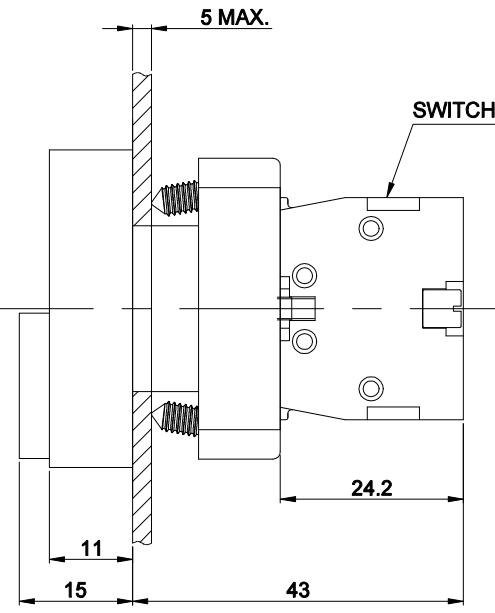

PART NUMBER: HBY5J-□

"□"	OPERATION MODE
20	2NO
02	2NC
11	1NO1NC

SPECIFICATIONS:

- SWITCH RATING: AC550V/1.4A, DC220V/0.6A.
- MECHANICAL LIFE: ≥500,000 cycles.
- ELECTRICAL LIFE: ≥50,000 cycles.
- CONTACT RESISTANCE: ≤50mΩ.
- INSULATION RESISTANCE: ≥100MΩ(500VDC).
- DIELECTRIC STRENGTH: 3,000V, RMS 50HZ, 1min.
- OPERATING TEMPERATURE: -25°C~ +55°C(NO FREEZING).
- OPERATING FORCE: ABOUT 8N(1NO1NC), 14N(2NO2NC).
- OPERATING TRAVEL: ABOUT 5.5mm.
- IP CLASS: IP40.
- GENERAL TOLERANCE: 0-18mm=±0.25, 18-80mm=±0.52.

MATERIALS:

- CONTACT: SILVER ALLOY.
- BUTTON: ABS.
- BASE: PBT.

BRAND 品牌		红波按钮制造有限公司			
ONPOW 欧宝龙®		ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
TITLE 名称	HBY5 SERIES PUSHBUTTON SWITCHES		UNIT 单位	mm	
DWG NO. 图号	HBY5J	SCALE 比例	1 : 1	SIZE 图纸	A4
FILE NAME 档案名称	HBY5双位钮 .DWG	DRAWN 制图	YDY 2022/04/15	SHEET 张	1/1 REV. 更改 1

1 2 3 4 5 6 7