





**SPECIFICATIONS**


Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

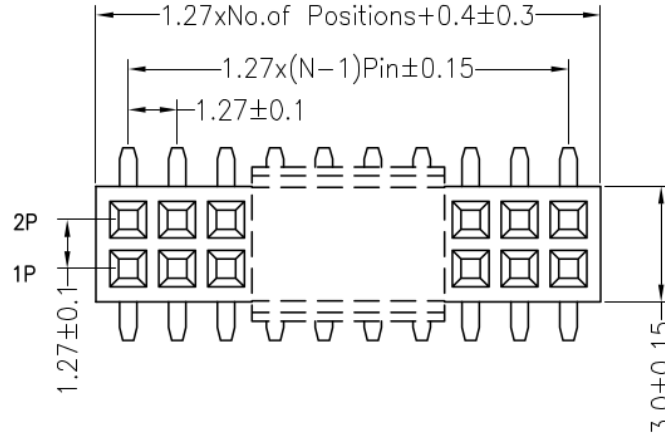

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE  $\pm 0.05$ )

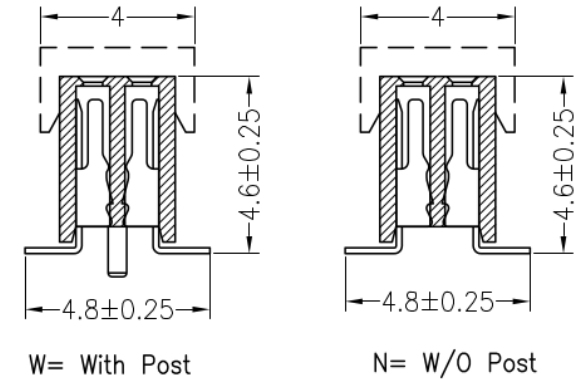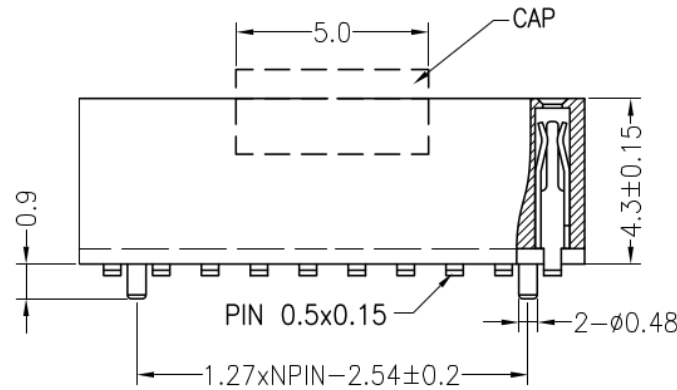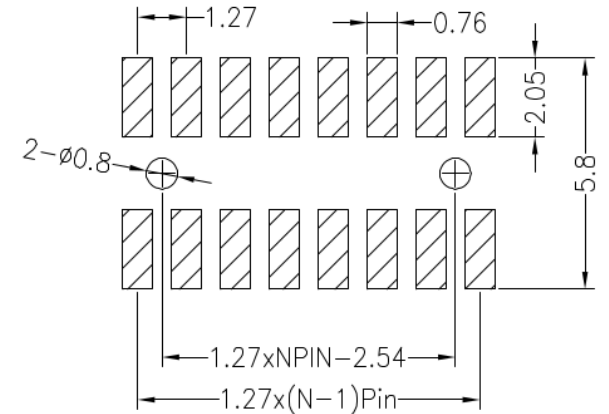

				OPERATION		DRAW	12.04.18	SCALE	FIT	<b>CONN THERM</b>			
				X.X	$\pm 0.30$			UNIT	mm				
				X.XX	$\pm 0.20$	CHECK	SIZE	A4	PART NO.				
A0	2012.04.18	NEW DRAWING		X.XXX	$\pm 0.10$	APPROVE	SHEET	1/1	TITLE:				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.		1.27PF 2xNPin H4.3 SMT			
1	2	3	4	5	6	7	8	9					