

Type : QXG4-X (built-in)

5 / 11



Picture

Specification :


Type	QXG4-X
Ultrasonic Power MAX	300W-600W
Frequency	25-40KHZ
Current	0.5-2.5A
Working Voltage	AC220V ±10% 50HZ
Environmental temperature	0-40°C
Relative Humidity	40%-90%
Size	220*167*92.5mm
Weight	2.5KG

Connection Port :

AC220V or AC 110 Power Supply	European standard / American standard plugs
Ultrasonic Output	16-2PA viation plug

Standard function (batch customizable)

- Touch panel: the key function is acrylic touch adjustment.
- Power adjustment: 60/100% setting.
- Timing function: 6/9/12, 10/15/20 minutes setting.
- Constant current function: automatic constant working current.
- Overheat protection: stop working at $\geq 70^{\circ}\text{C}$.
- Short circuit protection: load short circuit without output.
- Overcurrent protection: prevent excessive current.

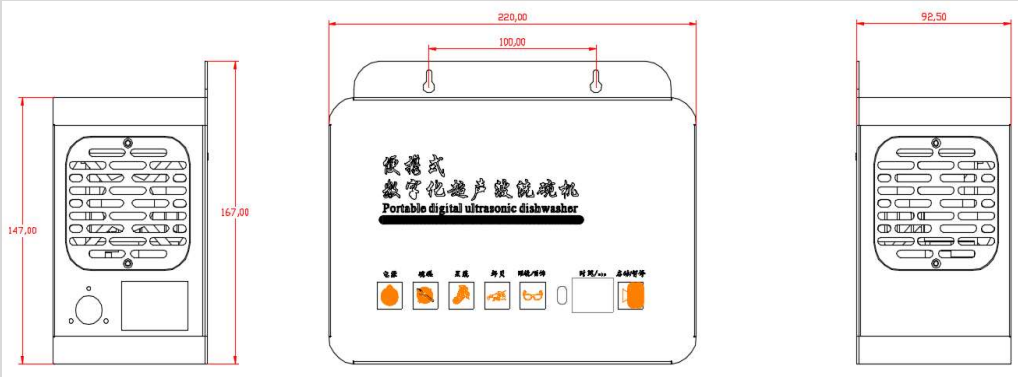

Installation Dimension