

General Description

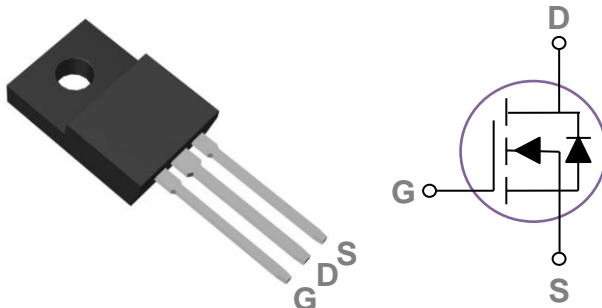
These N-Channel enhancement mode power field effect transistors are planar stripe, DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switch mode power supply

BVDSS	RDS(ON)	ID
700V	1.1Ω	11A

Features

- 700V, 11A, RDS(ON) = 1.1Ω@VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

TO220F Pin Configuration



Applications

- High efficient switched mode power supplies
- TV Power
- Adapter/charger
- Server Power
- LED Lighting

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	700	V
V _{Gs}	Gate-Source Voltage	±30	V
I _D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	11	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	7	A
I _{DM}	Drain Current – Pulsed ¹	44	A
EAS	Single Pulse Avalanche Energy ²	100	mJ
IAS	Single Pulse Avalanche Current ²	4.5	A
P _D	Power Dissipation ($T_c=25^\circ\text{C}$)	54	W
	Power Dissipation – Derate above 25°C	0.43	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction to ambient	---	62	°C/W
R _{θJC}	Thermal Resistance Junction to Case	---	2.3	°C/W



700V N-Channel MOSFETs

PMF11N70P

Electrical Characteristics (T_J=25 °C, unless otherwise noted)**Off Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	700	---	---	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =700V , V _{GS} =0V , T _J =25°C	---	---	1	uA
		V _{DS} =560V , V _{GS} =0V , T _J =100°C	---	---	20	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±30V , V _{DS} =0V	---	---	±100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =10V , I _D =5A	---	0.9	1.1	Ω
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250uA	2.5	3.5	4.5	V
g _{fS}	Forward Transconductance	V _{DS} =30V , I _D =5A	---	8	---	S

Dynamic and switching Characteristics

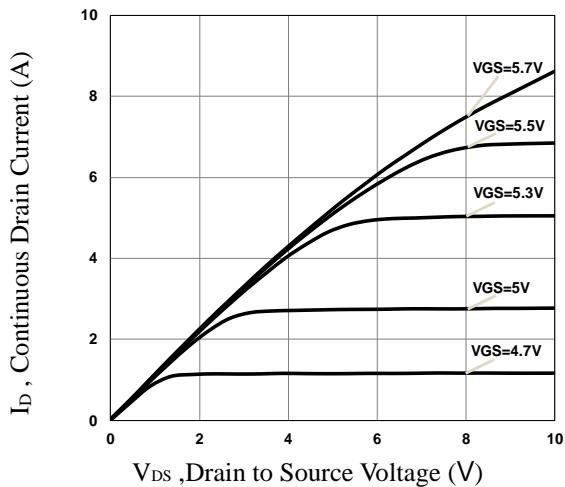
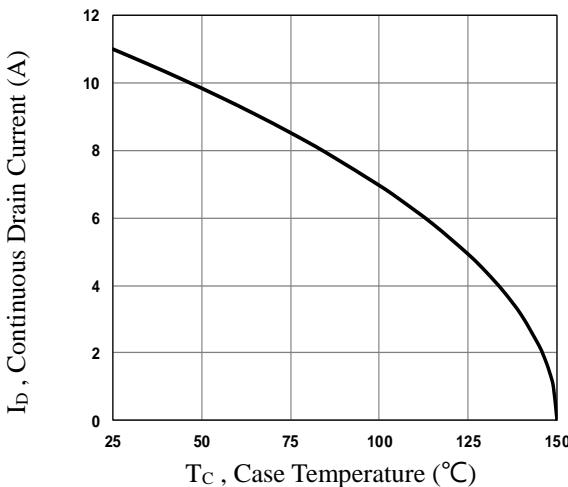
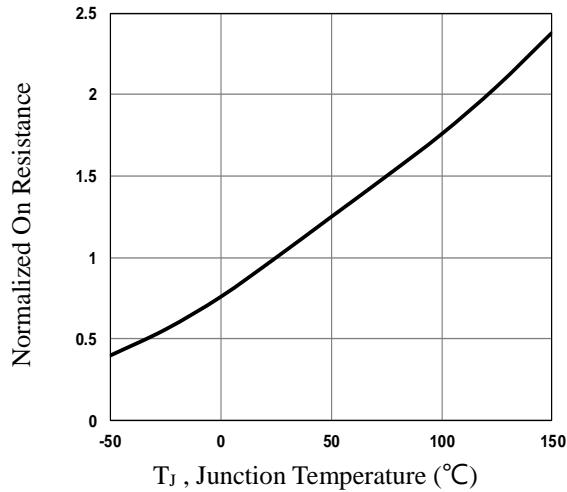
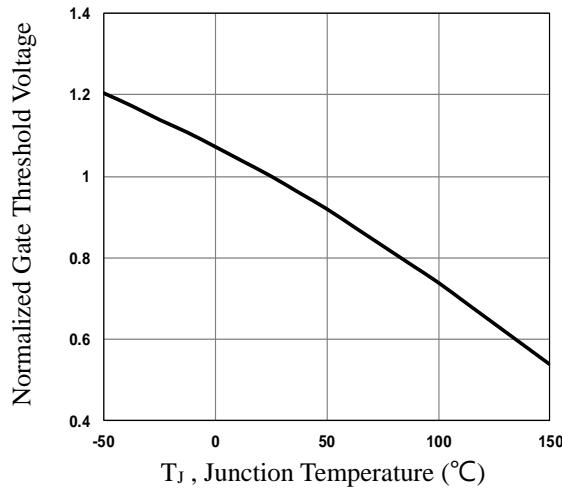
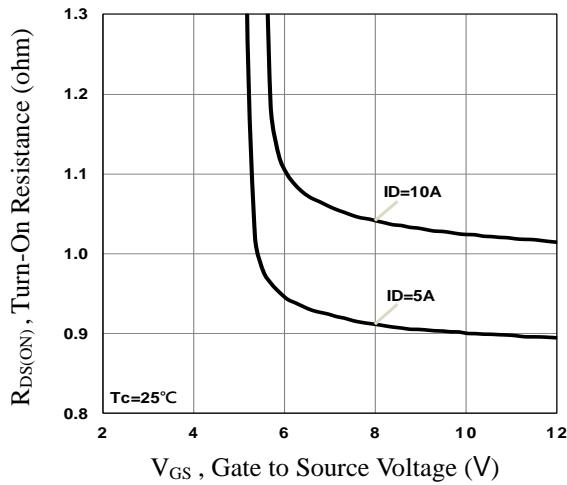
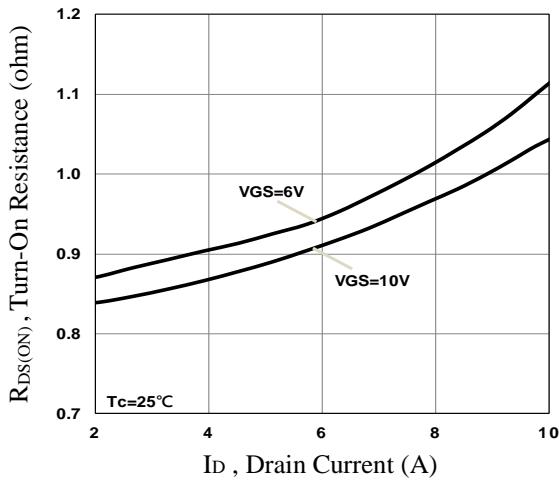
Q _g	Total Gate Charge ^{3,4}	V _{DS} =350V , V _{GS} =10V , I _D =6A	---	35	55	nC
Q _{gs}	Gate-Source Charge ^{3,4}		---	9	15	
Q _{gd}	Gate-Drain Charge ^{3,4}		---	17	25	
T _{d(on)}	Turn-On Delay Time ^{3,4}	V _{DD} =350V , V _{GS} =10V , R _G =25Ω I _D =6A	---	40	60	ns
T _r	Rise Time ^{3,4}		---	45	70	
T _{d(off)}	Turn-Off Delay Time ^{3,4}		---	90	135	
T _f	Fall Time ^{3,4}		---	30	45	
C _{iss}	Input Capacitance	V _{DS} =25V , V _{GS} =0V , F=1MHz	---	1600	2400	pF
C _{oss}	Output Capacitance		---	110	165	
C _{rss}	Reverse Transfer Capacitance		---	6	10	
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	---	1.8	---	Ω

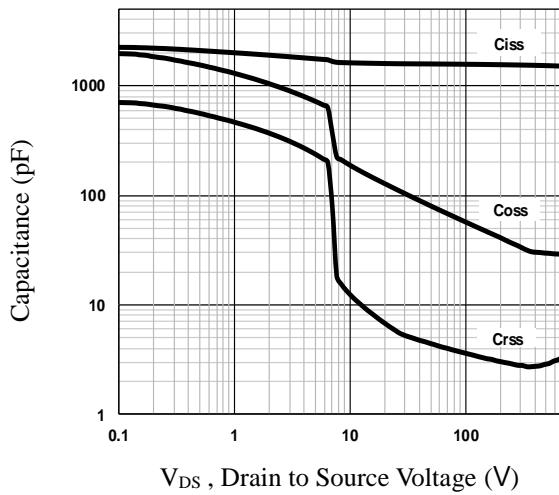
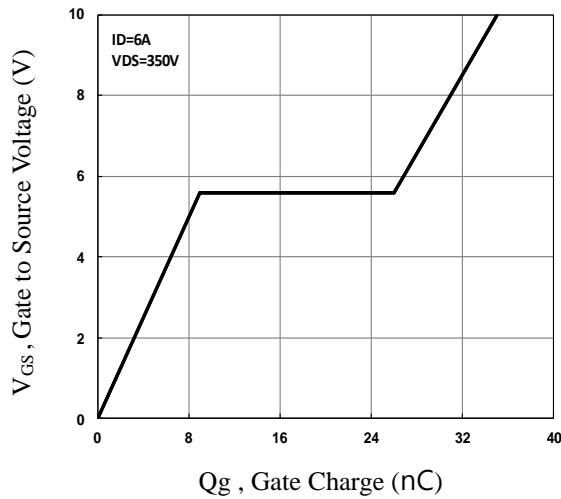
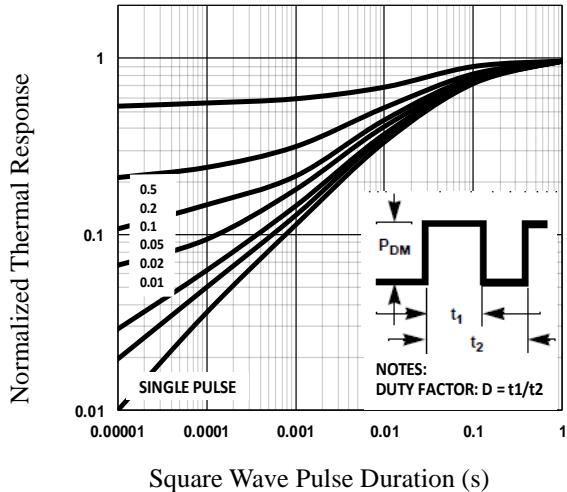
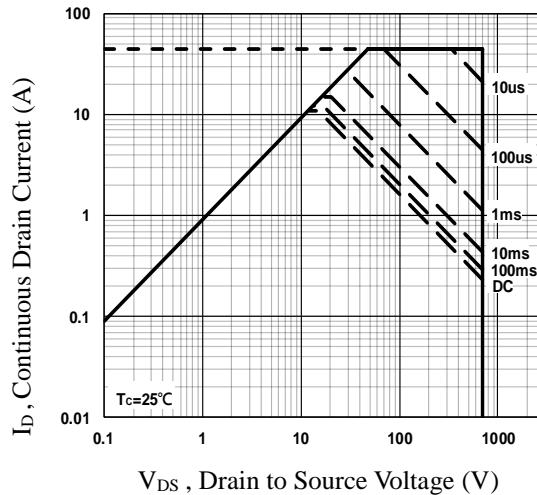
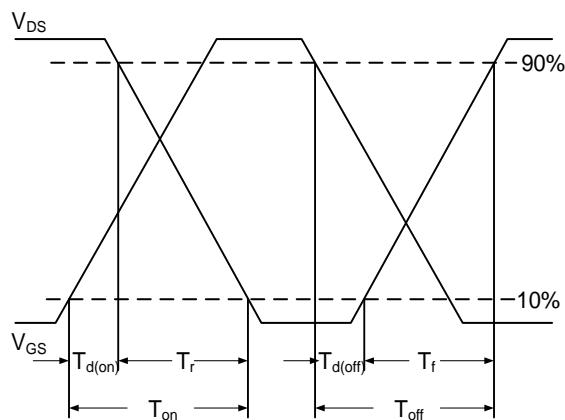
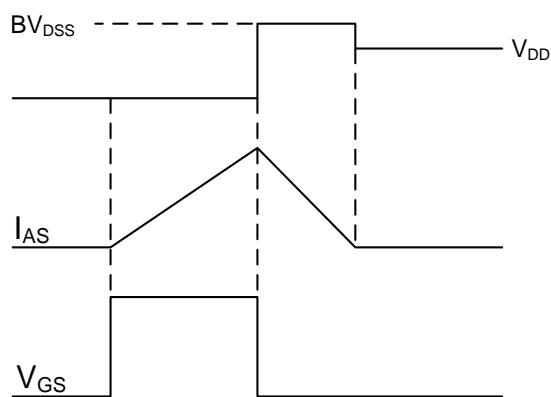
Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _s	Continuous Source Current	V _G =V _D =0V , Force Current	---	---	11	A
I _{SM}	Pulsed Source Current		---	---	22	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V , I _s =11A , T _J =25°C	---	---	1.3	V
t _{rr}	Reverse Recovery Time	V _R =400V, I _s =6A di/dt=100A/μs , T _J =25°C	---	350	---	ns
Q _{rr}	Reverse Recovery Charge		---	3.7	---	uC

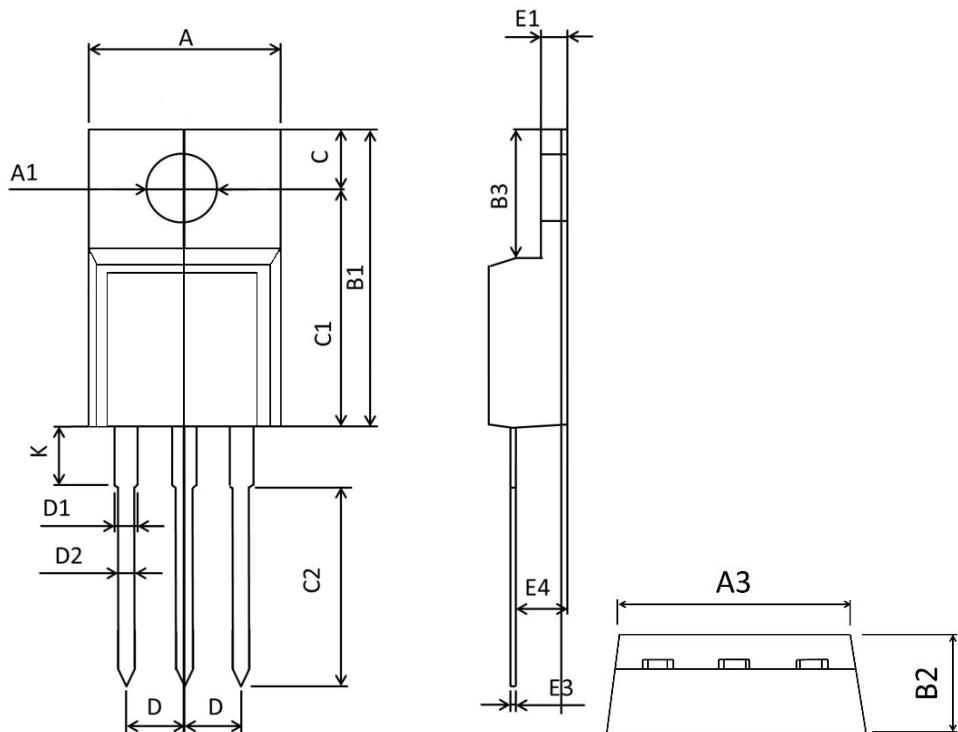
Note :

- Repetitive Rating : Pulsed width limited by maximum junction temperature.
- V_{DD}=50V, V_{GS}=10V, L=10mH, I_{AS}=4.5A., R_G=25Ω, Starting T_J=25°C.
- The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%.
- Essentially independent of operating temperature.


Fig.1 Typical Output Characteristics

Fig.2 Continuous Drain Current vs. T_c

Fig.3 Normalized R_{DSON} vs. T_j

Fig.4 Normalized V_{th} vs. T_j

Fig.5 Turn-On Resistance vs. V_{GS}

Fig.6 Turn-On Resistance vs. I_D


Fig.7 Capacitance Characteristics

Fig.8 Gate Charge Characteristics

Fig.9 Normalized Transient Impedance

Fig.10 Maximum Safe Operation Area

Fig.11 Switching Time Waveform

Fig.12 EAS Waveform

TO220F PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	9.860	10.460	0.389	0.411
A1	3.100	3.500	0.122	0.138
B1	15.450	16.300	0.608	0.642
B2	4.400	5.000	0.173	0.197
B3	6.280	7.100	0.247	0.280
C	3.100	3.500	0.122	0.138
C1	12.270	12.870	0.483	0.507
C2	9.600	10.520	0.378	0.414
D	2.540BSC		0.1BSC	
D1	1.070	1.470	0.042	0.058
D2	0.600	1.000	0.024	0.039
K	2.800	3.500	0.110	0.138
E1	2.340	2.740	0.092	0.108
E3	0.350	0.650	0.014	0.026
E4	2.460	2.960	0.097	0.117