

## 42W Blue+Push Dimming power supply



■ Approve



### Features

- Class II, SELV, built-in
- Input Voltage: 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: 0.95
- Efficiency: 86%
- 5 years warranty
- IP20

### Applications


- LED panel, LED down light, Ceiling light

### ◆ Description

FLS-42-1050 Blue LA-CSB is a 42W constant current LED driver with 700 to 1050mA output current and a forward voltage range from 9 to 52Vdc. The output current is adjustable by DIP Switch. With its dimensions from 97 x 43 x 30mm it is easy to integrate in Ceiling light and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

### ◆ Model code

#### FLS-42-1050 Blue LA-CSB

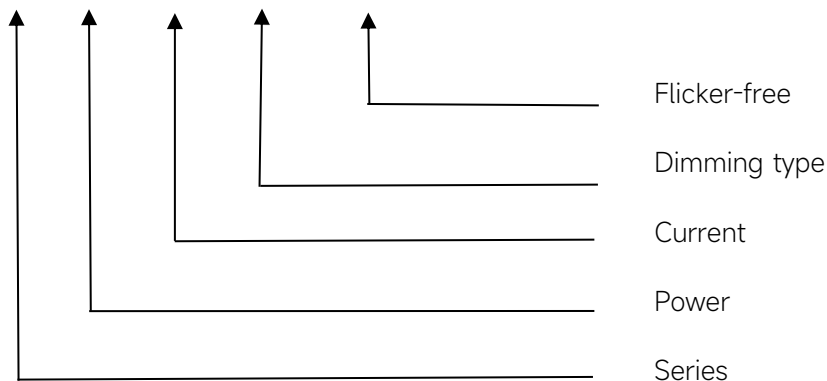

## ◆ Specification

	Constant Current (mA)	700mA	750mA	.....	1000mA	1050mA
Output	Voltage Range(VDC)	9-52VDC	9-52VDC	.....	9-42VDC	9-40VDC
	Unload voltage Max.(VDC)	60 VDC				
	Current Accuracy	±5%@220-240VAC				
	Output HF current ripple(≥1KHz)	±3%@Full Load,240VAC				
	Output LF current ripple(≤120Hz)	±3%@Full Load,240VAC				
	SVM	≤0.4@Full Load				
	P <sub>st</sub>	≤1@Full Load				
	Efficiency(Typ.)	≥86%				
	Input	Rated input voltage(VAC)	220-240VAC			
Range of input voltage(VAC)		176-264VAC				
Range of input voltage(VDC)		176-280VDC				
Frequency(Hz)		0/50/60 Hz				
Displacement factor		≥0.9				
Power Factor		> 0.95@220-240VAC, full load				
Input Current max		0.34A MAX. @Full Load,176VAC				
Start-up time		< 0.5S				
No Load Power		≤0.5W				
Standby Power		≤0.5W				
Network standby power		≤0.5W				
THD (Typ.)		<10% @ Full Load				
Dimming	Dimming	YES				
	Dimming mode	Bluetooth				
	Dimming depth	1%				
	Dimming current range	7mA~100%, ON/OFF, Push				
Protection	Over Load Protection	103-120%				
		Protection type: Auto Resume				
	Over Voltage Protection	> 60VDC				
		Protection type: Auto Resume				
	Short circuit Protection	Protection type: Auto Resume				
	Over Temperature Protection	Protection type: Auto Resume				
Environment	Operating Temperature	-25°C...+45°C				
	Humidity	20%-95%RH				
	T <sub>c</sub>	85°C				
	Storage Temperature	-25°C...+60°C				
	Life time	> 50,000h@T <sub>c</sub> =80°C				
Surface	Dimension	97X43X30mm With side caps :131X43X30mm)				

Standards	EN 61347-1; EN61347-2-13; EN62384 EN55015; EN61000-3-2 Class C; EN61000-3-3; EN 61547; EN 61000-4-2; EN 61000-4-5 —1000V;	
Others	ErP	EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	<p>1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature.</p> <p>2.Ripple &amp; Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF &amp; 47 uF parallel capacitor.</p> <p>3.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered.</p> <p>4.Data are typical values obtained from test samples</p>	

## ◆ Parameter


Number	Output				Switch position			
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)	1	2	3	
1	700mA	9-52VDC	60	36.4W	--	--	--	
2	750mA			39W	ON	--	--	
3	800mA			41.6W	--	ON	--	
4	850mA			9-49VDC	41.7W	ON	ON	--
5	900mA			9-47VDC	42.3W	--	--	ON
6	950mA			9-44VDC	41.8W	ON	--	ON
7	1000mA			9-42VDC	42W	--	ON	ON
*8	1050mA			9-40VDC	42W	ON	ON	ON


\* Factory default

## ◆ Circuit Breaker

I <sub>peak</sub>	T <sub>width</sub>	B10	B16	B20	C10	C16	C20
7A	34.31μs	23pcs	37pcs	47pcs	23pcs	37pcs	47pcs

◆ **Wiring diagram**

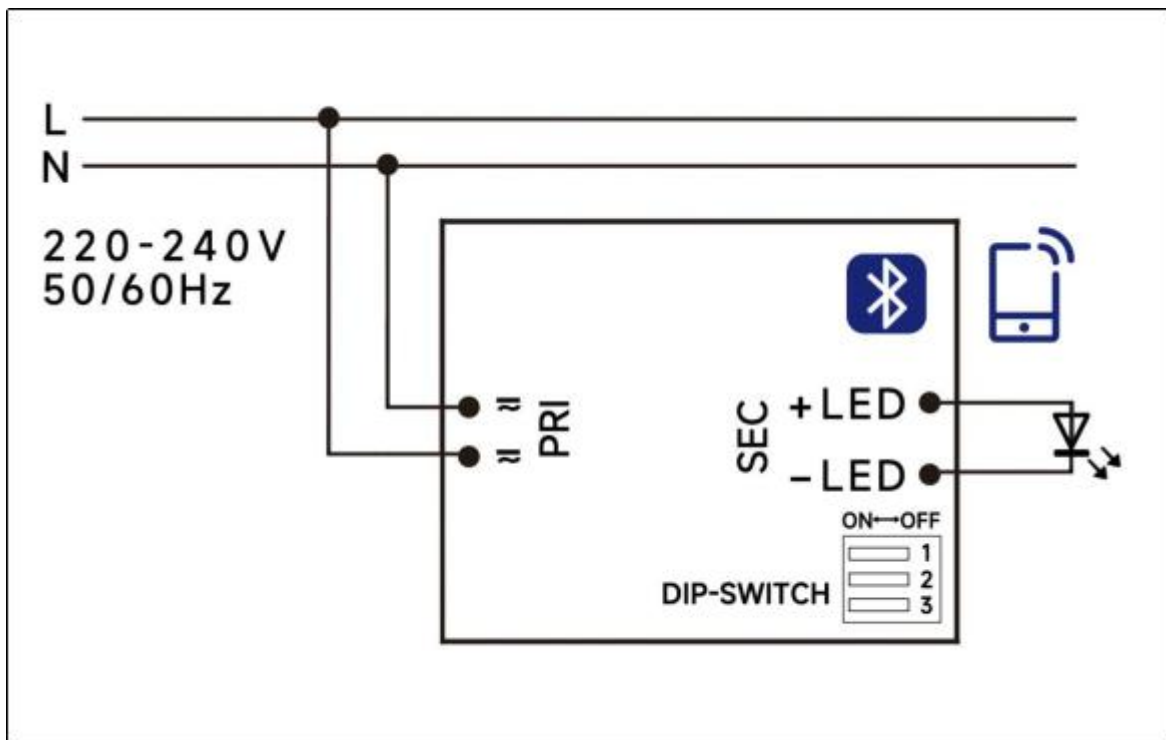


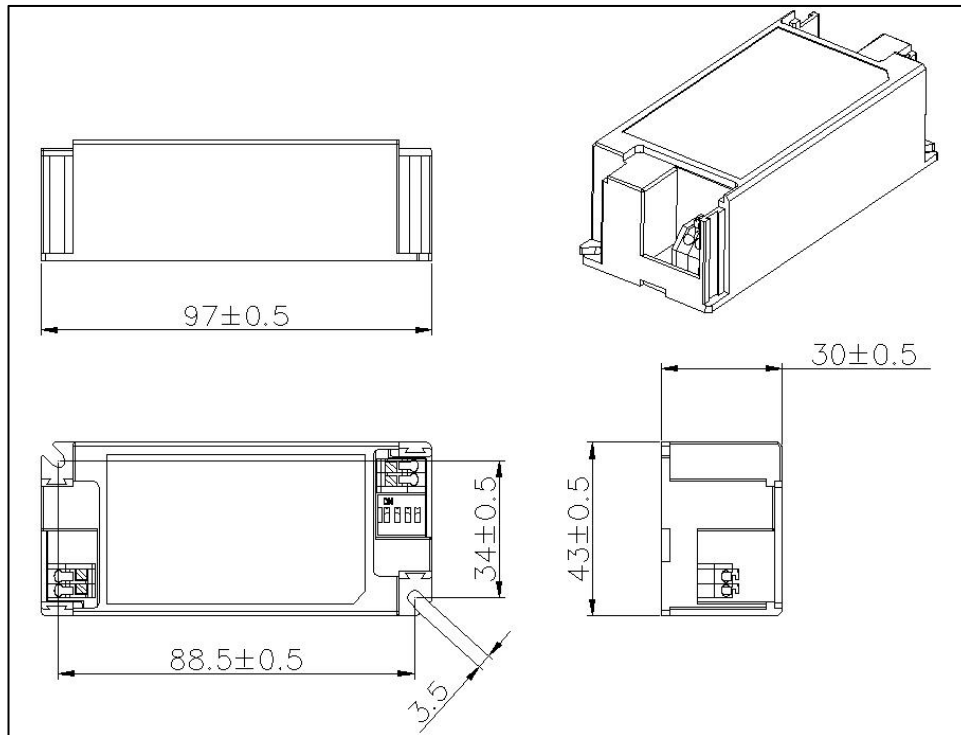**◆ 2D diagram**

**◆ Wiring & Connections**


	Specification item	Value (Unit )
Input	Input wire cross-section	0.5...1.5 mm <sup>2</sup>
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm <sup>2</sup>
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

## ◆ Curve for FLS-42-1050 Blue LA-CSB, I<sub>o</sub>=1050mA

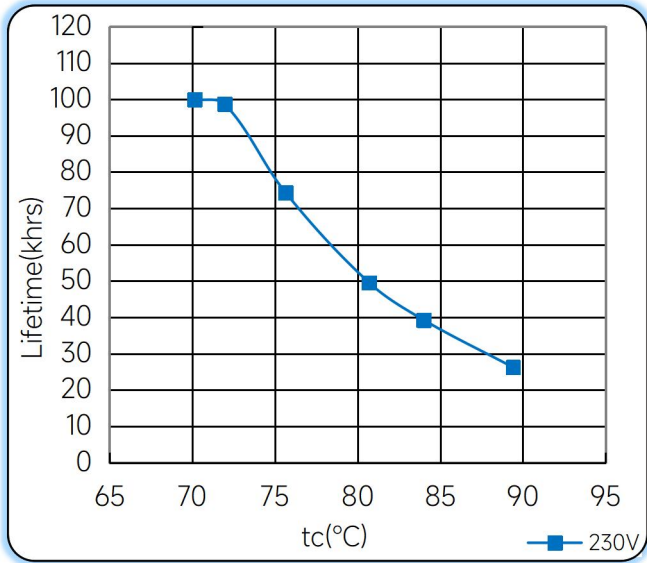
### Lifetime vs. Temperature Curve




### Efficiency vs. Load

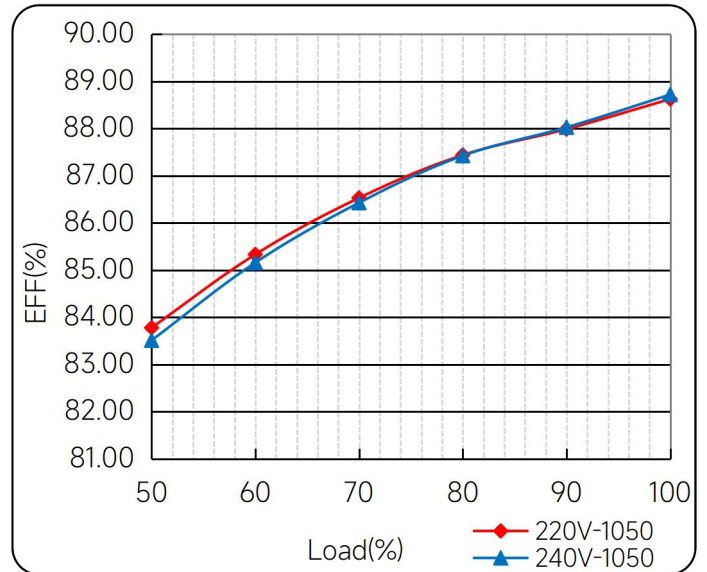


### Power Factor Characteristics

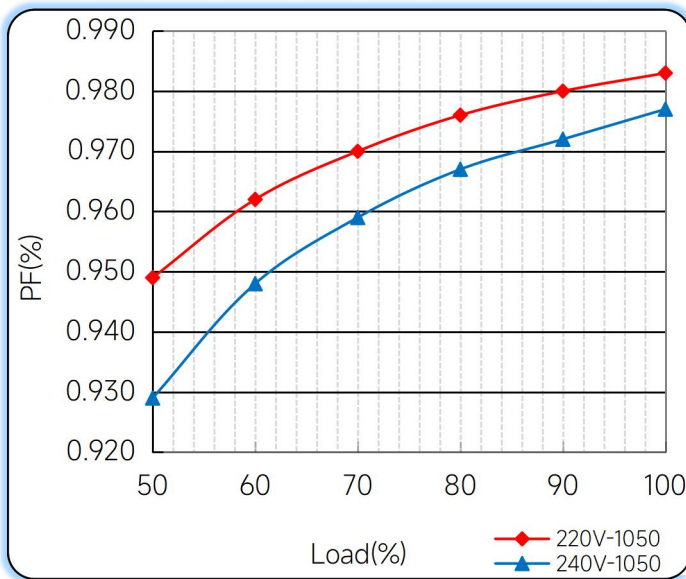

### THD vs. Load

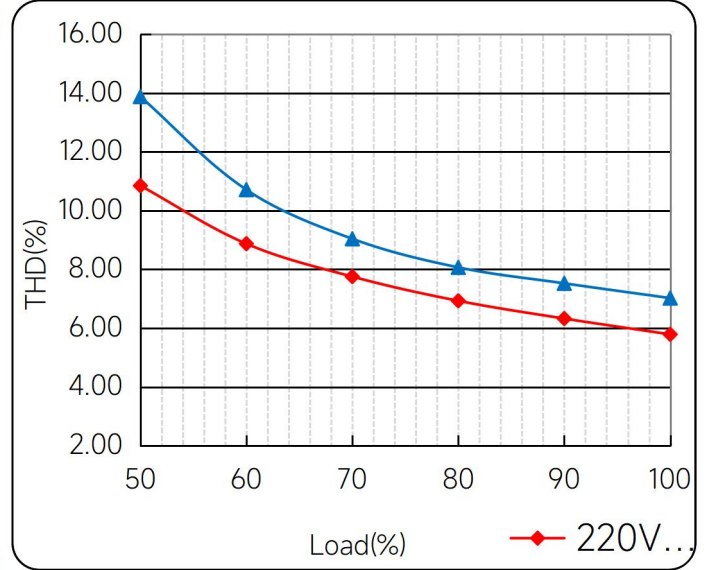

◆ **Operating window**

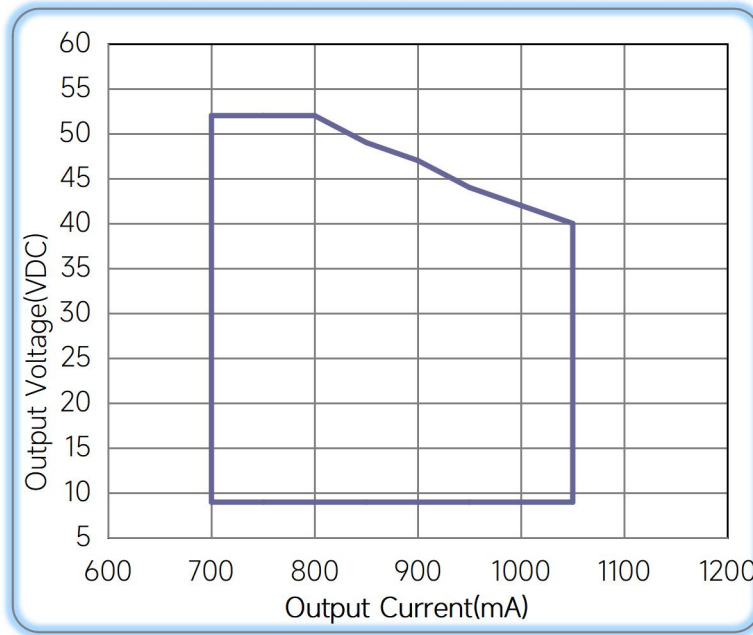

— Operating window 100%

◆ **Revision Updates**

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual