


BOM				
No.	Item	Specification		Remarks
1	Insulation film	White PET(43 μ m)		flame retardant rating VW-1
2	Reinforcement plate	Blue PET(225 μ m)		
3	Conductors (Flat copper wire)	Thickness	0.035mm	± 0.005
		Width	0.65mm	± 0.03
		Plating	Sn	$\geq 1\mu$ m
4	Number of Conductors	N	40	

Dimensions (Unit: mm)				
1	Total length	TL	100	± 2.5
2	Total width	W	11.00	± 0.1
3	Margin width	M	1.0	± 0.1
4	Pitch	P	1.0	± 0.08
5	Span	Pt	9.00	± 0.1
6	Thickness of connection area	T	0.3	± 0.05
7	Strip length	S1	4	± 1
		S2	4	± 1
8	Reinforcement length	B1	10	± 2
		B2	10	± 2

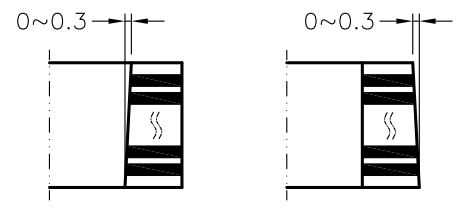

CONNTHERM	GENERAL TOLERANCE		SCALE: 3.5:1	DRAWN: Luoshengrong	DATE: 2023.7.20	DOCUMENT NO:	TITLE:	REV. A
	XX. ± 0.40		UNIT: mm	CHECK:	DATE:	PARTS NO:	SHEET: 1/1	
	X. ± 0.30							
	.X ± 0.25	X.' $\pm 2^\circ$	SIZE: A4	APPROVE: Xiaozhi jun	DATE: 2023.7.20	A1.0x10x100-441010b2T		
	.XX ± 0.15	.X' $\pm 1^\circ$						