



ACCEPTS ALL TABS
 .110 (2.8) TO .250 (6.4) x .020 (.50) TO .032 (.81)

VERTICAL OR HORIZONTAL ENTRY




MATERIAL:
 .016 (.41) Brass, Tin-Nickel Plate

CAT. NO.	ORIENTATION
3557	top & side entry





BOTTOM ENTRY




MATERIAL:
 .016 (.41) Brass, Tin-Nickel Plate

CAT. NO.	ORIENTATION
3577	bottom entry




Underwriters Laboratories, Inc.
 Recognized Component Program
 — UL File Number E201546




ACCEPTS .110 (2.8) TAB

VERTICAL ENTRY




MATERIAL:
 .012 (.30) Brass, Tin-Nickel Plate

CAT. NO.	ACCEPTS TAB	W
3534	.110 (2.8) x .020 (.51)	.070 (1.80)
3544	.110 (2.8) x .032 (.81)	.075 (1.92)




ACCEPTS .187 (4.8) TAB

VERTICAL ENTRY



MATERIAL: .016 (.41) Brass, Tin-Nickel Plate


CAT. NO.	ACCEPTS TAB	"W"
3548	.187 (4.8) x .020 (.51)	.093 (2.36)
3578†	.187 (4.8) x .020 (.51)	.093 (2.36)
3551	.187 (4.8) x .032 (.81)	.102 (2.59)



†Low insertion force design


ACCEPTS .205 (5.2) TAB

VERTICAL ENTRY




MATERIAL:
 .016 (.41) Brass, Tin-Nickel Plate

CAT. NO.	ACCEPTS TAB
3525	.205 (5.2) x .020 (.51)
3575*	.205 (5.2) x .032 (.81)




ACCEPTS .250 (6.4) TAB

VERTICAL ENTRY




MATERIAL:
 .016 (.41) Brass, Tin-Nickel Plate

CAT. NO.	ACCEPTS TAB
3528	.250 (6.4) x .032 (.81)





ACCEPTS .312 (7.9) TAB

OVER SIZED




MATERIAL:
 .020 (.51) Copper, Tin-Nickel Plate

CAT. NO. 3555




ACCEPTS .110 (2.8) TAB

HORIZONTAL ENTRY

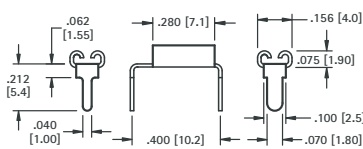


MATERIAL:
 .012 (.30) Brass, Tin-Nickel Plate

CAT. NO.	ACCEPTS TAB
3545	.110 (2.8) x .020 (.51)
3549	.110 (2.8) x .032 (.81)




ACCEPTS .187 (4.8), .205 (5.2), .250 (6.4) TAB

HORIZONTAL ENTRY

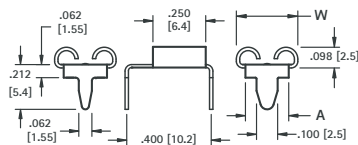

MATERIAL: Brass, Tin-Nickel Plate

CAT. NO.	ACCEPTS TAB	"W"	"A"	MATL THICK
3571	.187 (4.8) x .020 (.51)	.222 (5.6)	.162 (4.1)	.012 (.30)
3572*	.187 (4.8) x .032 (.81)			
3546	.205 (5.2) x .020 (.51)			
3550	.205 (5.2) x .032 (.81)	.240 (6.1)	.180 (4.6)	.012 (.30)
3547	.250 (6.4) x .032 (.81)	.291 (7.4)	.205 (5.2)	.016 (.41)



* Not UL Recognized