
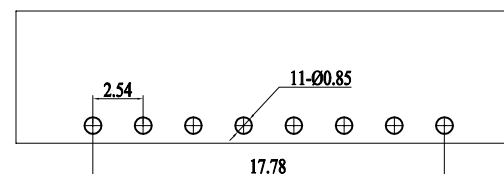
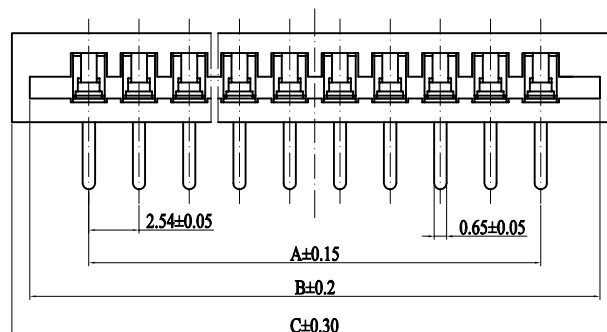



孔数	A	B	C
2	2.54	8.52	10.50
3	5.08	11.06	13.04
4	7.62	13.60	15.58
5	10.16	16.14	18.12
6	12.70	18.68	20.66
7	15.24	21.22	23.20
8	17.78	23.76	25.74
9	20.32	26.30	28.28
10	22.86	28.84	30.82
11	25.40	31.38	33.36
12	27.94	33.92	35.90
13	30.48	36.46	38.44
14	33.02	39.00	40.98
15	35.56	41.54	43.52
16	38.10	44.08	46.06
17	40.64	46.62	48.60
18	43.18	49.16	51.14
19	45.72	51.70	53.68
20	48.26	54.24	56.22
21	50.80	56.78	58.76

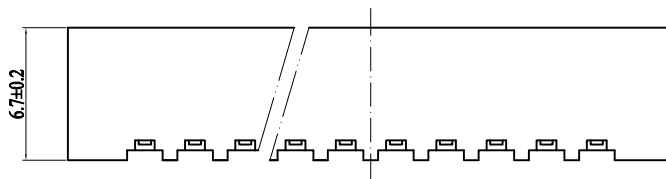

PCB寸法
PCBLAYOUT

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 200V AC DC
Voltage rating: 200V AC DC
- ◆ 额定电流: 1.0A AC DC MIN
Current rating: 1.0A AC DC MIN
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆ 绝缘电阻: 500MΩ MIN
Insulation resistance: 500MΩ MIN
- ◆ 接触电阻: 0.03Ω MAX
Contact resistance: 0.03Ω MAX
- ◆ 工作温度: -20°C ~ +85°C
Working Temperature: -20°C ~ +85°C
- ◆ 间距: 2.54 mm
Pitch: 2.54 mm

■ 材料 (MATERIAL)

- ◆ 外壳: 尼龙46 UL94V-0
Housing: PA46 UL94V-0

JINDA®
ZheJiang JinDa Electric Co. Ltd.
浙江津达电子有限公司

GENERAL TOLERANCE		SCALE
XX. ±0.25	XXX. ±0.40	UNIT mm
X. ±0.20	.XXX ±0.05	
.X ±0.15	X.° ±2°	
.XX ±0.10	.X° ±1°	

SIZE	UNIT
A4	mm

DRAWIN	DATE
CHECK	DATE
APPROVE	DATE

DWG. NO.	DATE
F:FPC2.54	DATE
PARTS NO.	DATE

FPC2.54-nPW

TITLT.	REV.
成品图	A
	SHEET.
	1/1